

**ICOM**

**SERVICE  
MANUAL**

HF ALL BAND TRANSCEIVER

**IC-725**

---

---

---

---

---

**Icom Inc.**

---

---

## INTRODUCTION

---

This service manual describes the latest service information for the **IC-725** HF ALL BAND TRANSCEIVER at the time of going to press.

If you require assistance or further information regarding the operation and capabilities of the **IC-725**, contact your nearest authorized Icom Dealer or Icom Service Center.

---

## DANGER

---

**NEVER** connect the transceiver to an AC outlet or to a DC power supply that uses more than 16 V. This will ruin the transceiver.

**DO NOT** expose the transceiver to rain, snow or any liquids.

**DO NOT** reverse the polarities of the power supply when connecting the transceiver.

**DO NOT** apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front end.



---

## ORDERING PARTS

---

Be sure to include the following four points when ordering replacement parts:

1. 10-digit order numbers
2. Component part number and name
3. Equipment model name and unit name
4. Quantity required

### <SAMPLE ORDER>

1110001310 IC     $\mu$ PC577HA    IC-725 MAIN UNIT    5 pieces  
8810005510 Screw PH M3 x 6 ZK BS IC-725 Top cover    10 pieces

Addresses are provided on the inside back cover for your convenience.

---

## REPAIR NOTE

---

1. Make sure a problem is internal before disassembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from a power source.
3. **DO NOT** force any of the variable components. Turn them slowly and smoothly.
4. **DO NOT** short any circuits or electronic parts. An insulated tuning tool **MUST** be used for all adjustments.
5. **DO NOT** keep power ON for a long time when the transceiver is defective.
6. **DO NOT** transmit power into a signal generator or a sweep generator.
7. **ALWAYS** connect a 40 dB~50 dB attenuator between the transceiver and a deviation meter or spectrum analyzer when using such test equipment.
8. **READ** the instructions of test equipment thoroughly before connecting equipment to the transceiver.

## TABLE OF CONTENTS

|                  |   |                 |
|------------------|---|-----------------|
| <b>SECTION 1</b> | <b>SPECIFICATIONS</b> .....                   | <b>1—1</b>      |
| <b>SECTION 2</b> | <b>INSIDE VIEWS</b> .....                     | <b>2—1 ~ 2</b>  |
| <b>SECTION 3</b> | <b>BLOCK DIAGRAM</b> .....                    | <b>3—1</b>      |
| <b>SECTION 4</b> | <b>CIRCUIT DESCRIPTION</b> .....              | <b>4—1 ~ 7</b>  |
| 4-1              | RECEIVER CIRCUITS .....                       | 4—1             |
| 4-2              | TRANSMITTER CIRCUITS .....                    | 4—4             |
| 4-3              | PLL CIRCUITS .....                            | 4—6             |
| 4-4              | LOGIC CIRCUITS .....                          | 4—7             |
| 4-5              | REGULATOR CIRCUITS .....                      | 4—7             |
| <b>SECTION 5</b> | <b>MECHANICAL PARTS AND DISASSEMBLY</b> ..... | <b>5—1 ~ 7</b>  |
| 5-1              | FRAME DISASSEMBLY .....                       | 5—1             |
| 5-2              | PA UNIT AND ACCESSORIES .....                 | 5—3             |
| 5-3              | FRONT AND PLL UNITS CONNECTOR ASSEMBLY .....  | 5—5             |
| 5-4              | FRONT AND MAIN UNITS CONNECTOR ASSEMBLY ..... | 5—6             |
| 5-5              | PA AND FILTER UNITS CONNECTOR ASSEMBLY .....  | 5—7             |
| <b>SECTION 6</b> | <b>ADJUSTMENT PROCEDURES</b> .....            | <b>6—1 ~ 7</b>  |
| 6-1              | PREPARATION BEFORE SERVICING .....            | 6—1             |
| 6-2              | PLL ADJUSTMENT .....                          | 6—2             |
| 6-3              | RECEIVER ADJUSTMENT .....                     | 6—4             |
| 6-4              | TRANSMITTER ADJUSTMENT .....                  | 6—6             |
| <b>SECTION 7</b> | <b>BOARD LAYOUTS</b> .....                    | <b>7—1 ~ 5</b>  |
| 7-1              | FRONT UNIT .....                              | 7—1             |
| 7-2              | MAIN UNIT .....                               | 7—2             |
| 7-3              | PLL UNIT .....                                | 7—3             |
| 7-4              | PA UNIT .....                                 | 7—4             |
| 7-5              | DDS UNIT .....                                | 7—5             |
| 7-6              | AM • FM UNIT (OPTIONAL) .....                 | 7—5             |
| <b>SECTION 8</b> | <b>PARTS LIST</b> .....                       | <b>8—1 ~ 13</b> |
| <b>SECTION 9</b> | <b>VOLTAGE DIAGRAMS</b> .....                 | <b>9—1 ~ 2</b>  |
| 9-1              | FRONT AND MAIN UNITS .....                    | 9—1             |
| 9-2              | PLL AND PA UNITS .....                        | 9—2             |

# SECTION 1 SPECIFICATIONS

## ■ GENERAL

- Frequency coverage : Receive 500 kHz~30 MHz  
 Transmit 160-m band 1.8~ 2.0 MHz 17-m band 18.068~18.168 MHz  
 80-m band 3.5~ 4.0 MHz 15-m band 21.0 ~21.45 MHz  
 40-m band 7.0~ 7.3 MHz 12-m band 24.89 ~24.99 MHz  
 30-m band 10.1~10.15 MHz 10-m band 28.0 ~29.7 MHz  
 20-m band 14.0~14.35 MHz
- Modes : SSB (A3J), CW (A1), AM (A3), FM (F3)  
 (UI-7 AM · FM UNIT is required for AM transmit and FM transmit/receive.)
- Number of memory channels : 26
- Antenna impedance : 50  $\Omega$  unbalanced
- Usable temperature range : -10 °C~+60 °C (+14 °F~+140 °F)
- Frequency stability : Less than  $\pm 200$  Hz up to one hour after power is turned ON.  
 Less than  $\pm 30$  Hz after one hour at +25 °C (+77 °F).  
 Less than  $\pm 350$  Hz at 0 °C~+50 °C (+32 °F~+122 °F).
- Power supply requirement : 13.8 V DC  $\pm 15$  %, negative ground
- Current drain (at 13.8 V DC) : Receive squelched 1.2 A max. audio output 1.5 A  
 Transmit 20 A
- Dimensions : 241 (W)  $\times$  94 (H)  $\times$  239 (D) mm (Projections not included)  
 9.5 (W)  $\times$  3.7 (H)  $\times$  9.4 (D) in
- Weight : 4.6 kg (10.1 lb)

## ■ TRANSMITTER

- Output power : SSB, CW, FM 10~100 W continuously adjustable  
 AM 10~40 W continuously adjustable
- Spurious emissions : More than 50 dB below peak output power
- Carrier suppression : More than 40 dB below peak output power
- Unwanted sideband : More than 50 dB down with 1 kHz AF input
- Microphone impedance : 600  $\Omega$


## ■ RECEIVER

- Receive system : SSB, CW, AM Double-conversion superheterodyne  
 FM Triple-conversion superheterodyne
- Intermediate frequencies : 1st SSB 70.4515 MHz  
 CW 70.4506 MHz  
 AM, FM 70.4500 MHz  
 2nd SSB 9.0115 MHz  
 CW 9.0106 MHz  
 AM, FM 9.0100 MHz  
 3rd FM 455 kHz
- Sensitivity (preamplifier ON) : SSB, CW (10 dB S/N) 1.8~30 MHz Less than 0.15  $\mu$ V (-123 dBm)  
 AM (10 dB S/N) 0.5~1.8 MHz Less than 13.0  $\mu$ V (-85 dBm)  
 1.8~30 MHz Less than 2.0  $\mu$ V (-101 dBm)  
 FM (12 dB SINAD) 28~30 MHz Less than 0.5  $\mu$ V (-113 dBm)
- FM squelch sensitivity : Less than 0.3  $\mu$ V (preamplifier ON)
- Selectivity : SSB, CW More than 2.3 kHz/-6 dB Less than 4.0 kHz/-60 dB  
 AM More than 6.0 kHz/-6 dB Less than 20.0 kHz/-40 dB  
 FM More than 15 kHz/-6 dB Less than 30 kHz/-50 dB
- Spurious response rejection : More than 70 dB
- Audio output impedance : 8  $\Omega$
- Audio output power : More than 2.6 W at 10 % distortion with an 8  $\Omega$  load
- RIT variable range : More than  $\pm 1$  kHz


All stated specifications are subject to change without notice or obligation.

## SECTION 2 INSIDE VIEWS


### • PLL UNIT

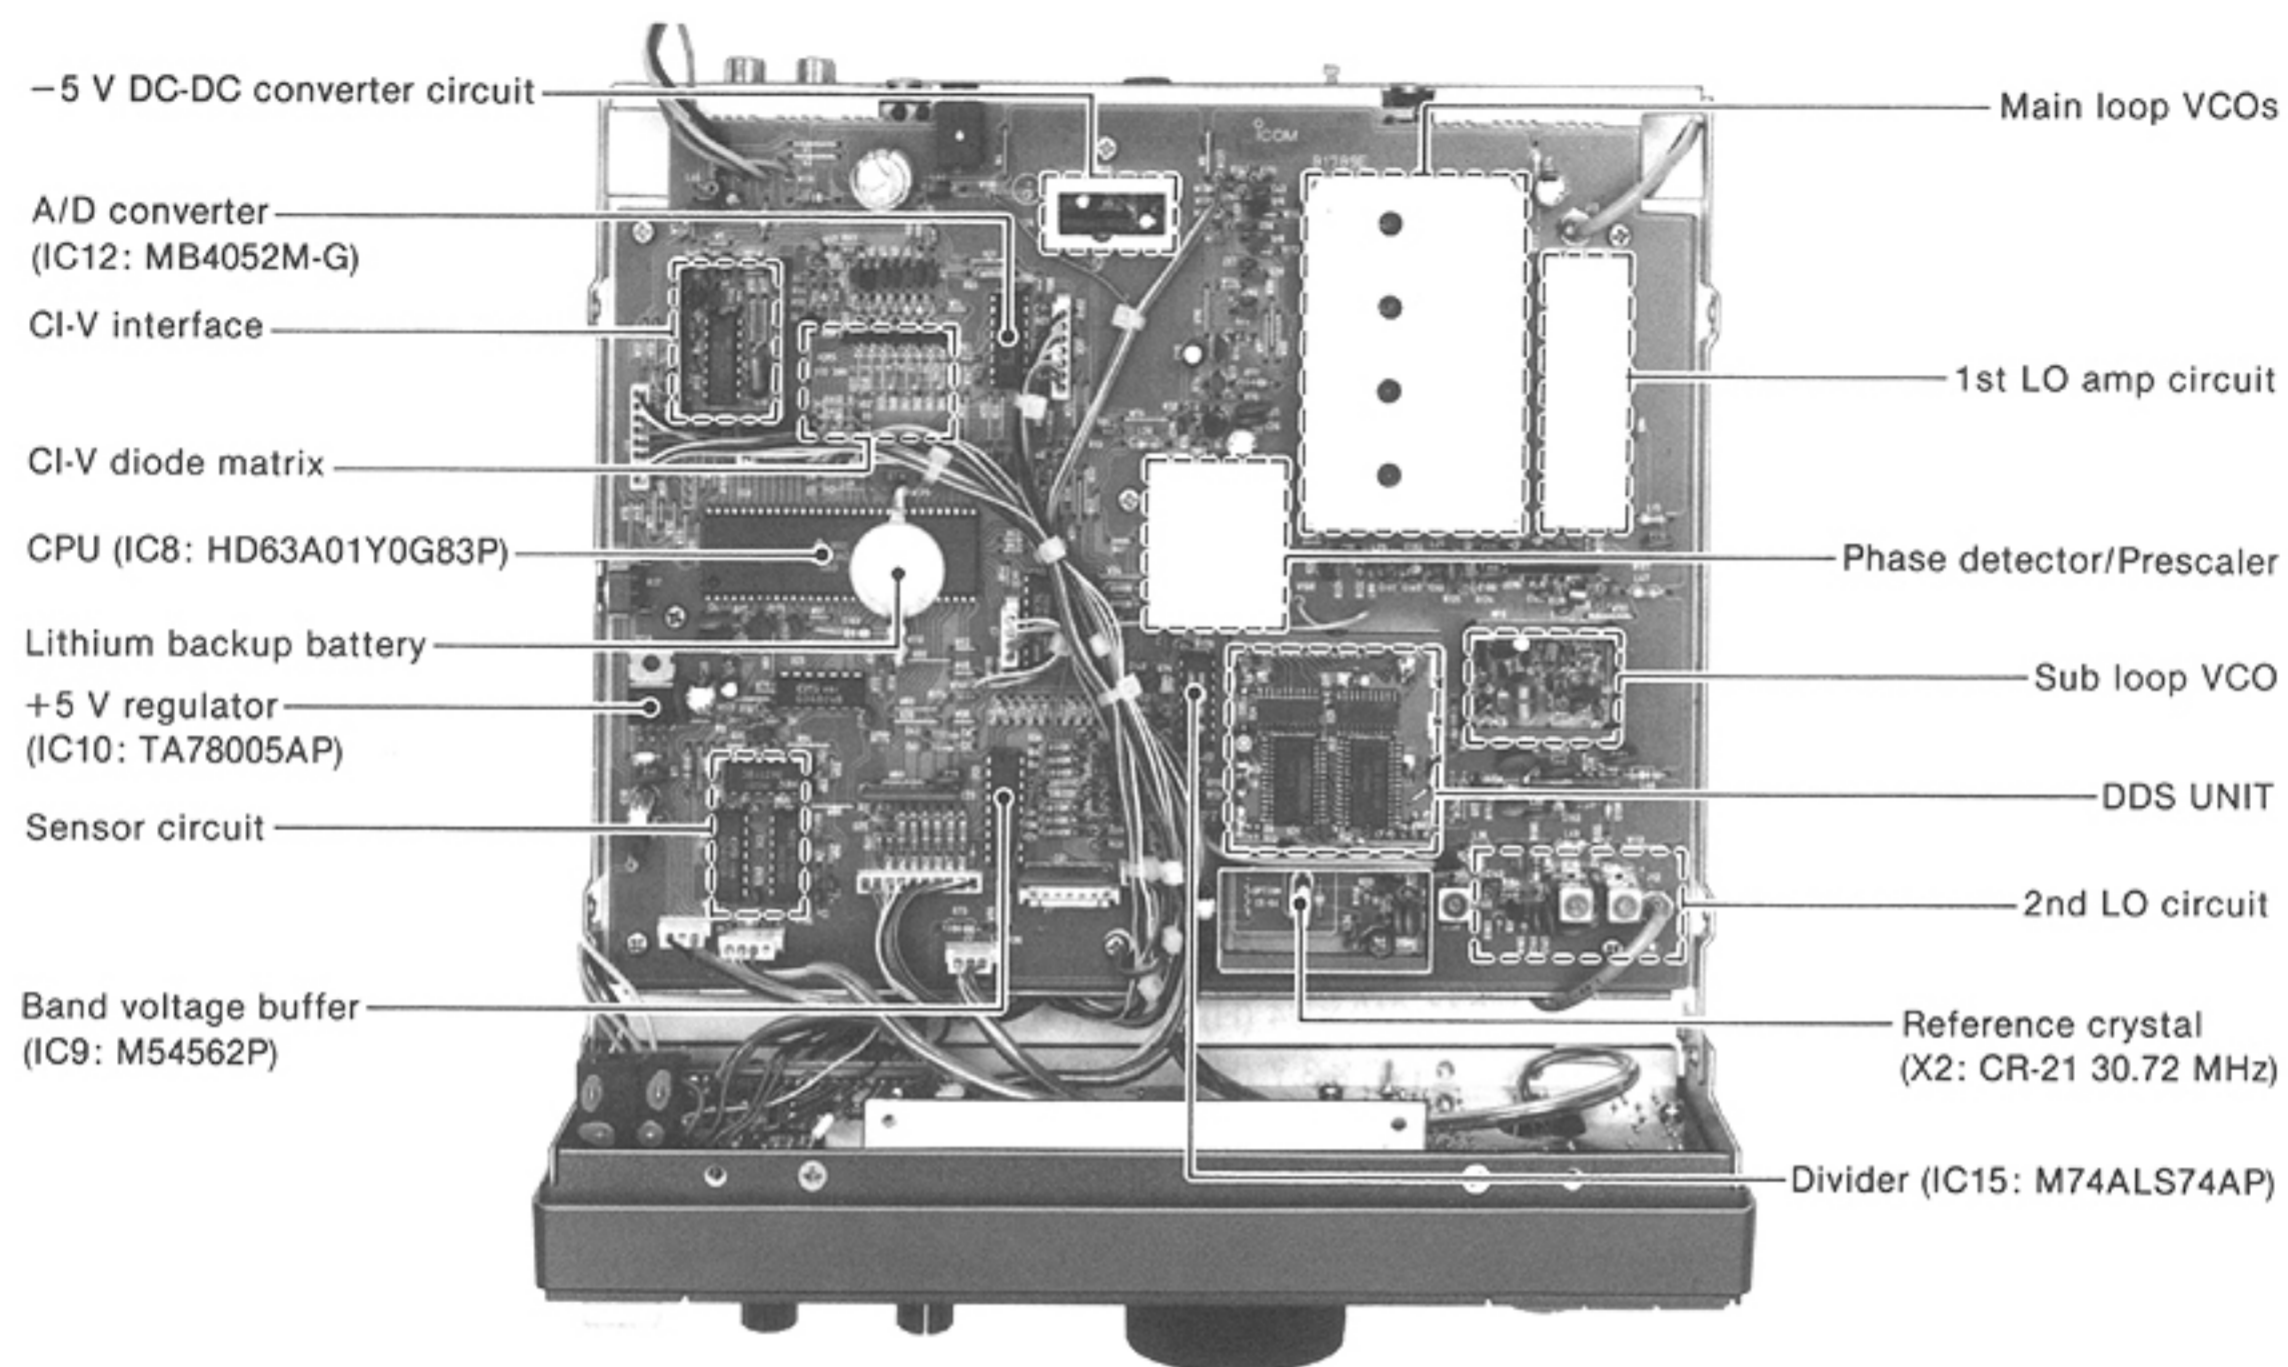


### • MAIN UNIT

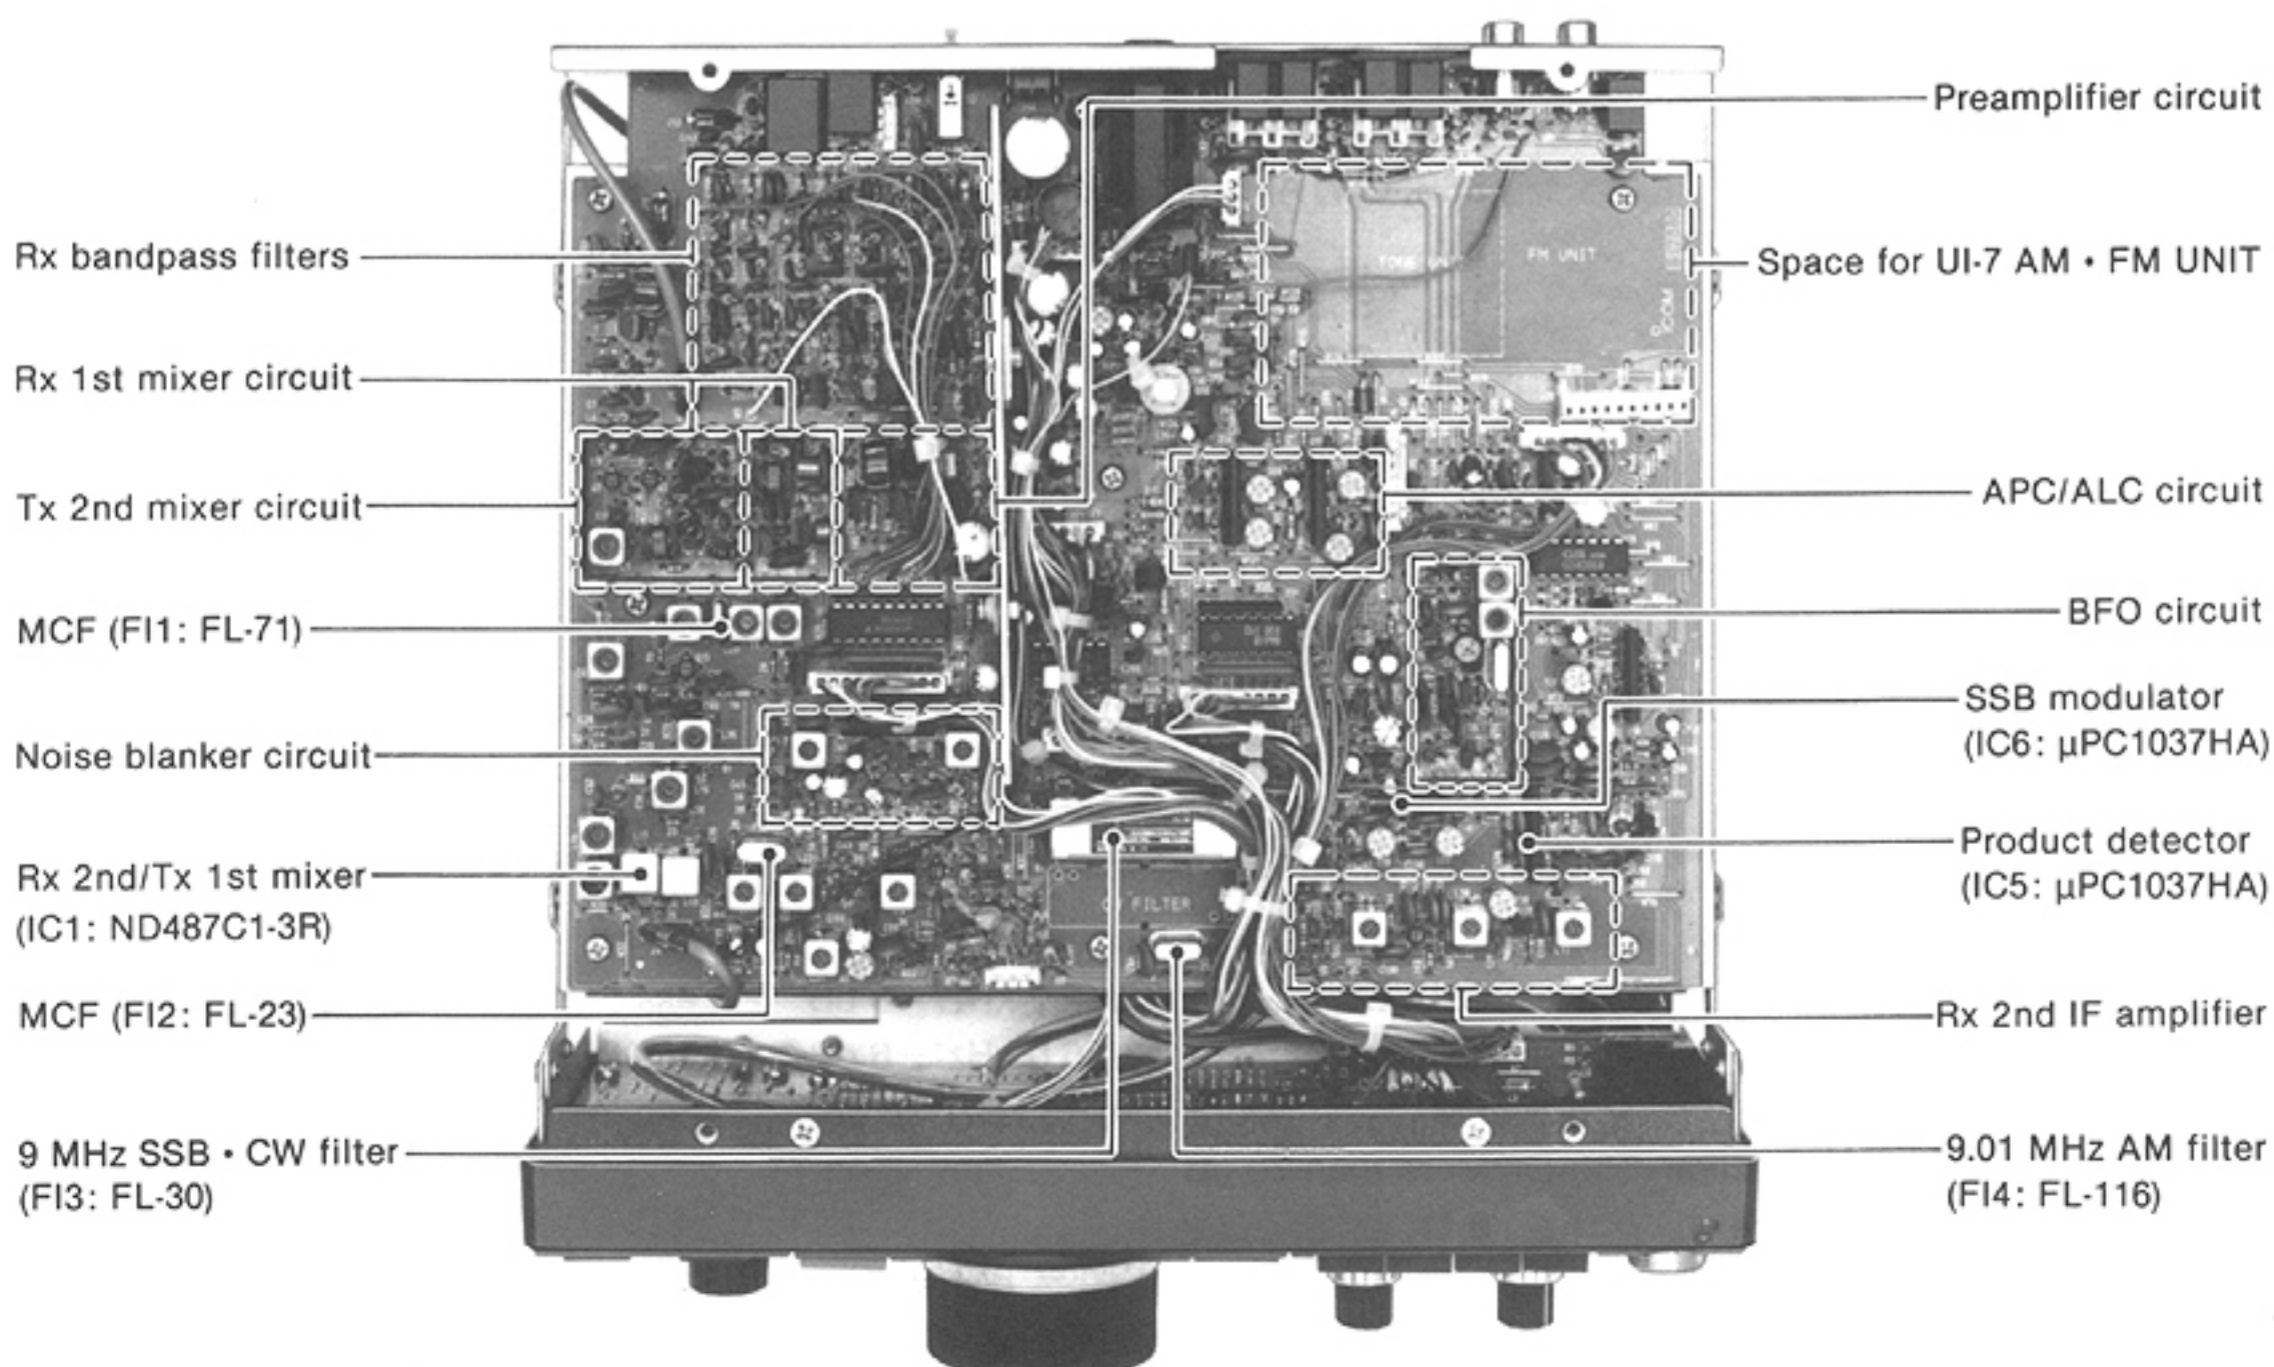

• PA AND FILTER UNITS

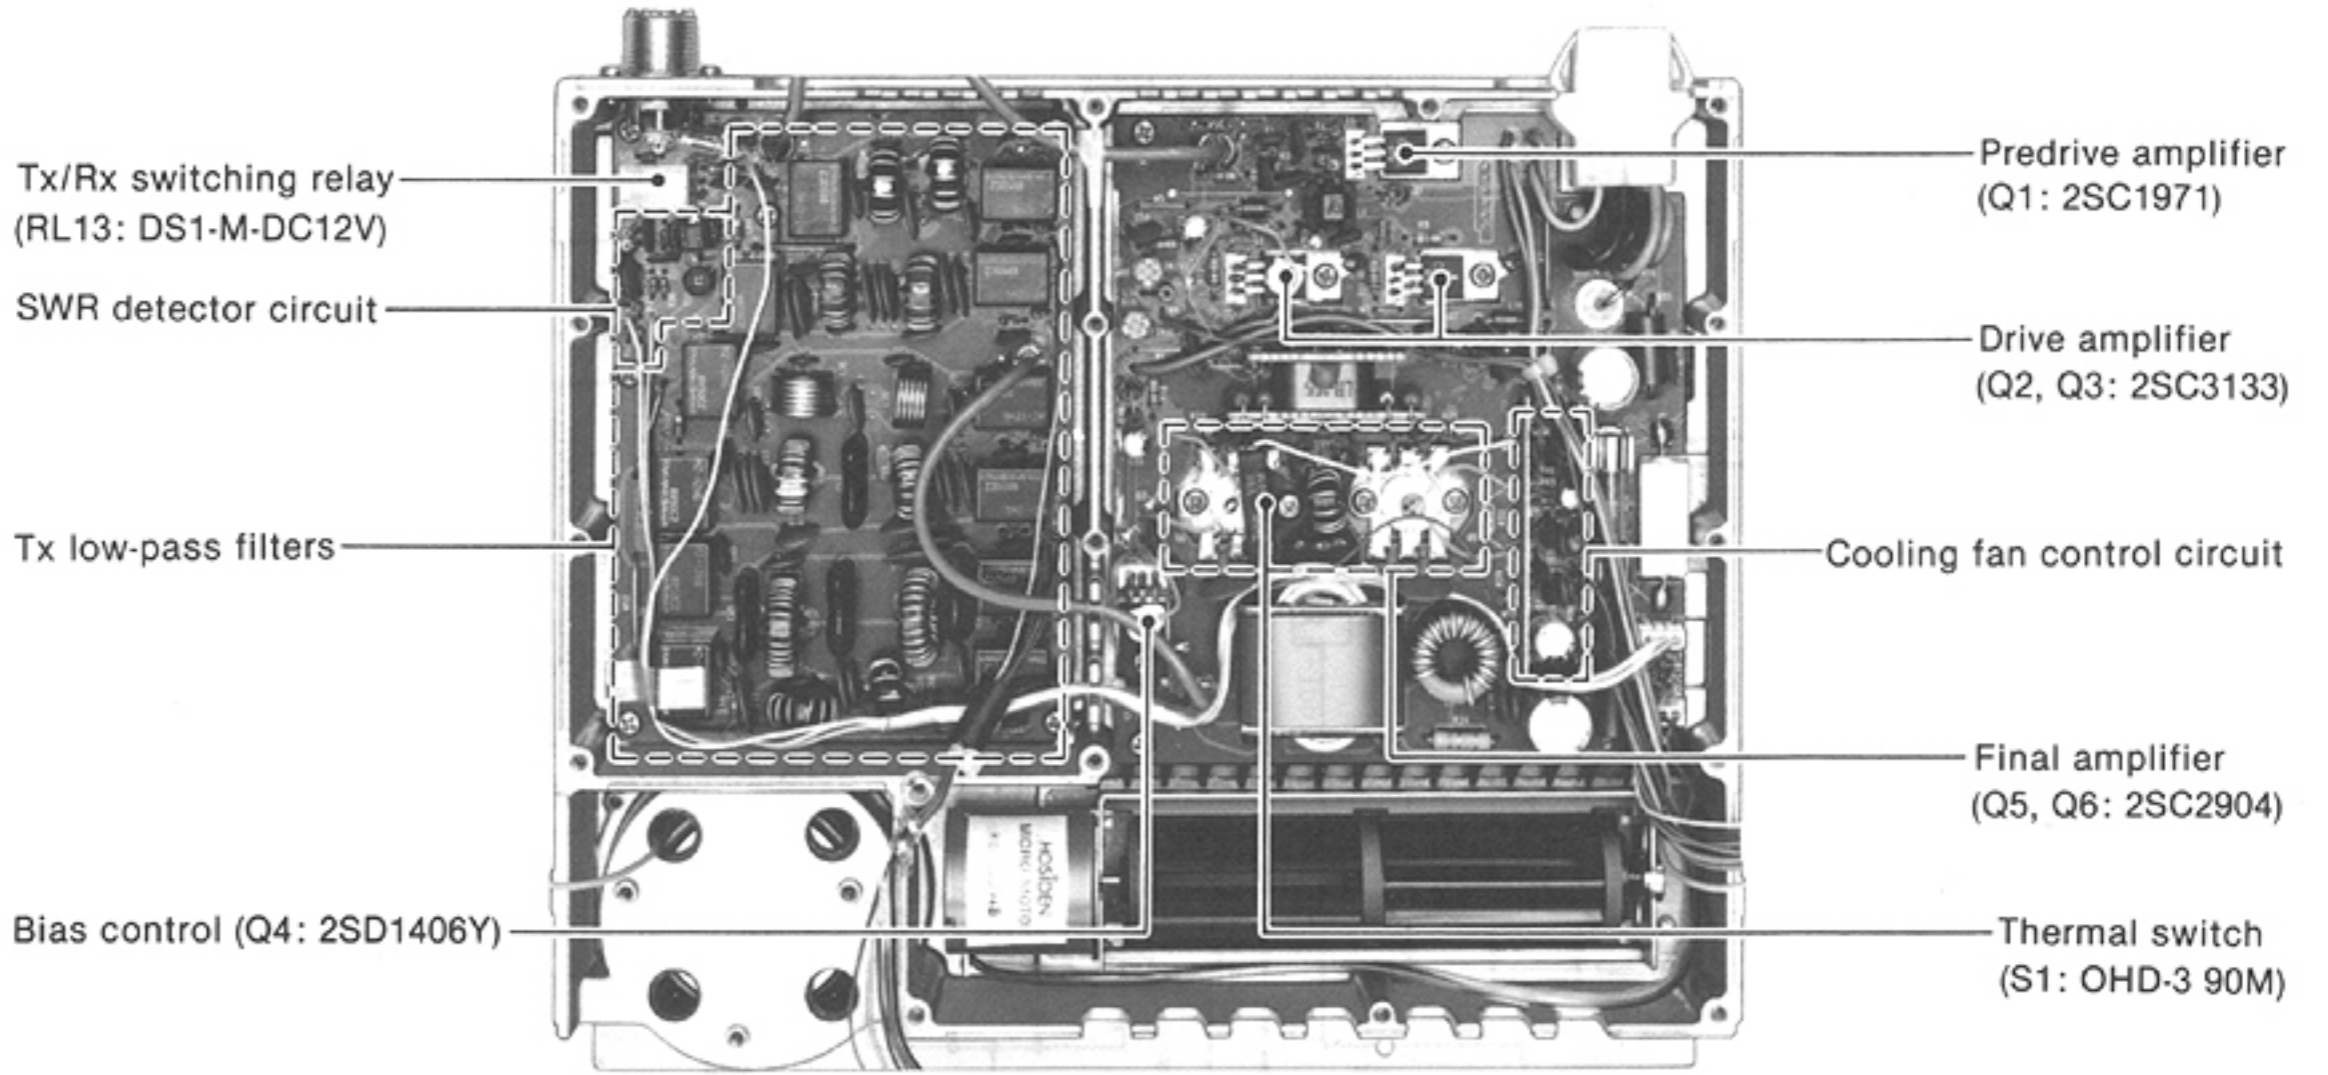

# SECTION 3 BLOCK DIAGRAM

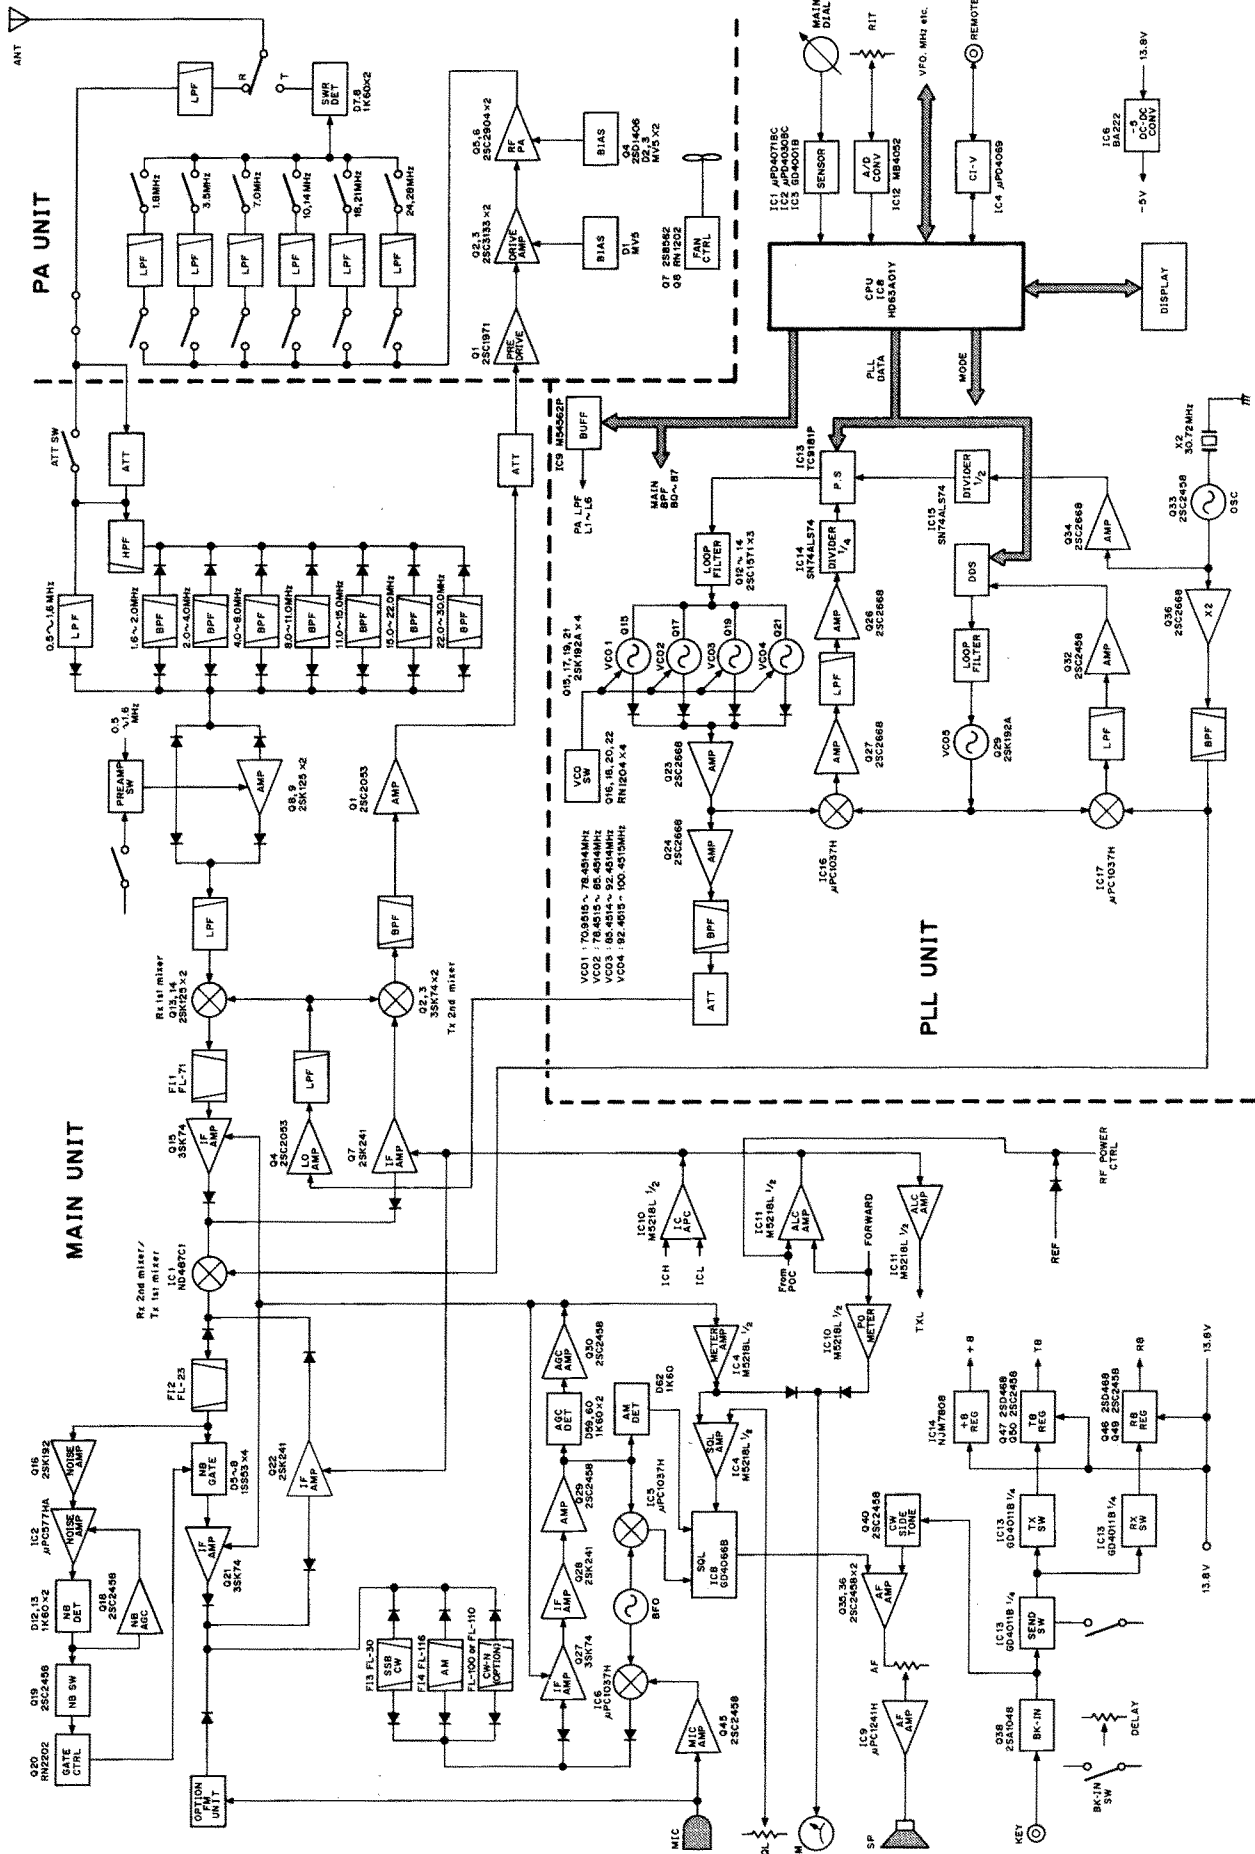

## SECTION 4 CIRCUIT DESCRIPTION

### 4-1 RECEIVER CIRCUITS

#### 4-1-1 RF SWITCHING CIRCUIT (PA AND MAIN UNITS)

RF signals from the antenna connector pass through the transmit/receive switching relay (RL13) and a low-pass filter, and are applied to the MAIN UNIT via P2 (MAIN UNIT: J12).

The signals from the PA UNIT either bypass or are attenuated at 20 dB attenuator (R102, R103, RL1). There are no non-linear components between the antenna connector and attenuator to prevent distortion caused by strong signals. The signals are then applied to RF filters.

#### 4-1-2 RF BANDPASS FILTER CIRCUIT (MAIN UNIT)

The RF UNIT has 7 RF bandpass filters (BPF) for signals above 1.6 MHz and 1 low-pass filter (LPF) for signals below 1.6 MHz. The signals pass through one of the bandpass or low-pass filters depending on the receive frequency range.

##### (1) 0.5~1.6 MHz

A diode is not used at the low-pass filter entrance removing diode distortion from very strong signals. Signals bypass a preamplifier by the bypass switch (Q12).

##### (2) 1.6 MHz AND ABOVE

Signals are applied to a high-pass filter consisting of L42, L43, C143~C146. This filter suppresses strong signals below 1.6 MHz such as a broadcasting station.

The filtered signals are applied to one of 7 bandpass filters depending on the frequency of the signals and then to the preamplifier circuit (Q8, Q9).

##### (3) FILTER SWITCHING CIRCUIT

An RF bandpass filter is selected with BPF switching voltage (B0~B7) from the CPU via IC16 current amplifier. The switching voltage of the BPF entrance is higher than the BPF exit to improve multi-signal and strong signal characteristics.

#### 4-1-3 PREAMPLIFIER CIRCUIT (MAIN UNIT)

The preamplifier circuit uses low-noise junction FETs (2SK125×2) to provide 10 dB gain over a wideband frequency range.

When the [PRE] switch is turned ON, the signals from the RF filter are amplified by the preamplifier circuit (Q8, Q9). When the [PRE] switch is turned OFF, the signals bypass the preamplifier through D30 and D32. When the operating frequency is below 1.6 MHz, Q12 turns ON and the signals bypass the preamplifier regardless of the [PRE] switch.

Amplified or bypassed signals are applied to the 1st mixer circuit via the low-pass filter. The low-pass filter cuts off at 35 MHz to suppress image frequency at the 1st mixer circuit (Q13, Q14).

#### PREAMP CIRCUIT

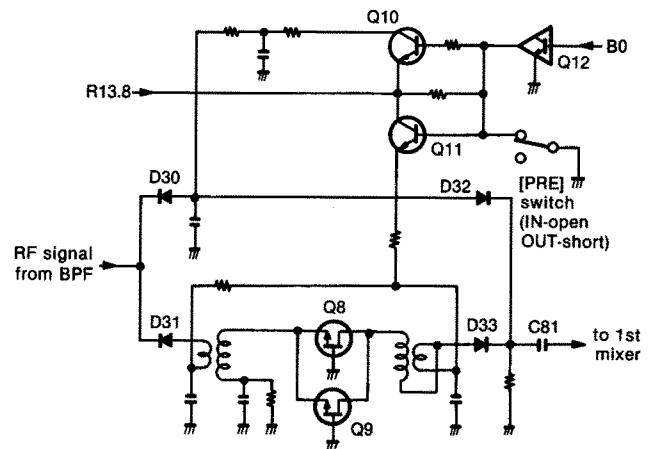


Fig. 1

#### 4-1-4 1ST MIXER CIRCUITS (MAIN UNIT)

The signals from the low-pass filter enter the 1st mixer circuit (Q13, Q14) to be converted to a 70.45 MHz 1st IF signal.

##### EXACTNESS 1ST IF FREQUENCY

| MODE   | FREQUENCY (MHz) |
|--------|-----------------|
| SSB    | 70.4515         |
| CW     | 70.4506         |
| AM, FM | 70.4500         |

The 1st mixer circuit employs a balanced mixer using low-noise junction FETs (2SK125×2) to expand the dynamic range.

The 1st LO signal (70.9515~100.4515 MHz) enters the MAIN UNIT from the PLL UNIT via J5. The signal is amplified at Q4, filtered by a low-pass filter, and then applied to the 1st mixer circuit (Q13, Q14). The low-pass filter employs a ring core inductor to prevent 1st LO leakage signals. The output level from Q4 is approx. 25 dBm.

The 1st IF signal is applied to an MCF (Monolithic Crystal Filter; F11) to suppress out-of-band signals. The signal is amplified at the 1st IF amplifier (Q15), and then applied to the 2nd mixer (IC1).



### 4-1-5 IF CIRCUITS (MAIN UNIT)

The 1st IF signal from Q15 is converted to a 9 MHz 2nd IF signal at the 2nd mixer (IC1). IC1 is a DBM (Double Balanced Mixer).

#### EXACTNESS 2ND IF FREQUENCY

| MODE   | FREQUENCY (MHz) |
|--------|-----------------|
| SSB    | 9.0115          |
| CW     | 9.0106          |
| AM, FM | 9.0100          |

The 2nd LO signal (61.44 MHz) from the PLL UNIT via J4 is applied to the 2nd mixer. The converted 2nd IF signal passes through D4 (D35 for transmitting) and is applied to the MCF (F12) to suppress unwanted signals.

The signal output from F12 passes through the noise blanker gate (D5~D8) and is amplified at the 2nd IF amplifier (Q21). The signal enters one of the three 9 MHz filters (F13, F14, optional CW narrow filter) or optional AM · FM UNIT via D52. The filters are selected with mode selecting signals (SSB · CW, AM, CW-N) and the "T8" voltage line.

The signal from a 9 MHz filter is amplified at the 2nd IF amplifiers (Q27~Q29) and applied to the demodulator circuit.

Dual-gate FETs are used on the 1st and 2nd IF amplifiers (Q15, Q21, Q27). The 2nd gates of Q15, Q21 and Q27 are controlled by AGC bias voltage. A rapid time constant is used for Q27 to prevent raising the edge distortion of receive signals.

R140, connected to the gate of Q28, improves the temperature characteristics of the receiver gain. R138 adjusts the receiver gain.

### 4-1-6 NOISE BLANKER CIRCUITS (MAIN UNIT)

The IC-725 uses a noise trigger noise blanker circuit that cuts out pulse-type noise signals at the noise blanker gate (D5~D8).

A portion of the signals from F12 is amplified at the noise amplifiers (Q16, IC2) and detected at the noise detector (D12, D13). The detected voltage from the noise detector is applied to the noise blanker switch (Q19).

The threshold level of the noise blanker switch is set at 0.9 V. When the detected voltage exceeds the threshold level, Q20 outputs a blanking signal to activate the noise blanker gate (D5~D8).

A portion of the detected voltage is applied to the noise AGC circuit (Q18) and fed back to the noise amplifier (IC2) as noise AGC voltages. The time constant of the noise AGC circuit is determined by R43, R47 and C60. This AGC circuit does not operate to detect pulse-type noise.

When the operating frequency or mode is changed, the "DNB" signal line becomes "LOW," turning Q20 ON. The noise blanker gate prevents PLL click noise.

### 4-1-7 BFO CIRCUIT (MAIN UNIT)

A 9 MHz signal oscillated at the BFO circuit (Q31, X1) is buffer-amplified at Q42 and used at the balanced modulator (IC6) and a product detector (IC5). The BFO frequency is shifted with a mode signal using D67~D69.

In USB mode, the "USB" signal line becomes "HIGH," turning ON D69. The frequency is then adjusted with C294 to set the USB carrier point.

At CW mode transmitting, the "CW" signal line becomes "HIGH" and Q33 becomes OFF, turning ON D68. The frequency is then adjusted with L83 to set the CW transmit carrier point.

In LSB mode, the "LSB" signal line becomes "HIGH," turning ON D67. The frequency is then adjusted with L82 to set the LSB carrier point.

### IF CIRCUIT

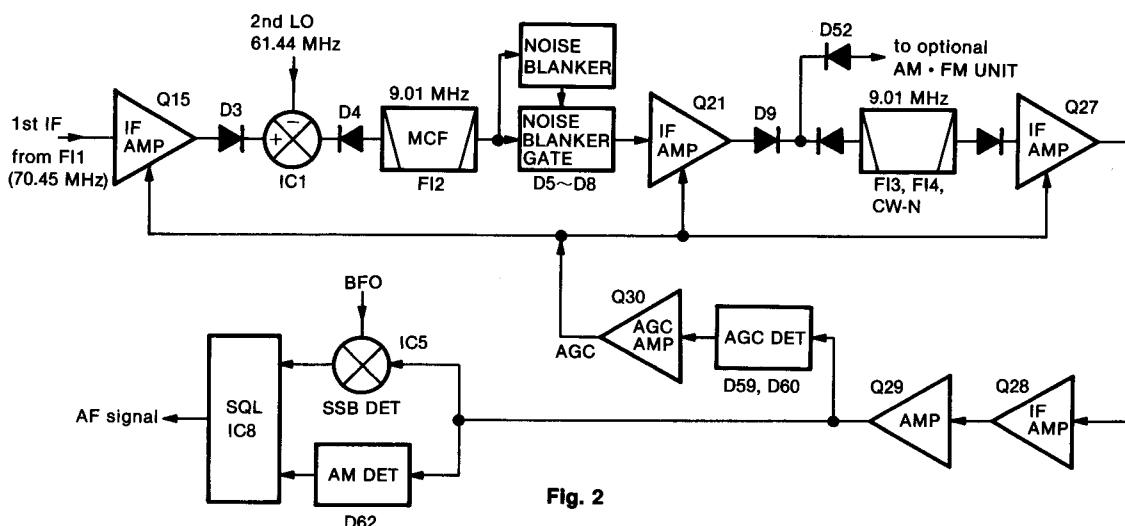


Fig. 2

### BFO FREQUENCY IN EACH MODE

| MODE    | FREQUENCY (MHz) |
|---------|-----------------|
| USB     | 9.0130          |
| CW (Tx) | 9.0106          |
| LSB     | 9.0100          |
| CW (Rx) | 9.0098          |
| AM      | NO OUTPUT       |

### 4-1-8 DEMODULATOR CIRCUITS (MAIN UNIT)

The IC-725 has 2 detector circuits, a product detector and a diode detector to demodulate the SSB, CW signal and AM signal respectively.

In SSB or CW mode, the 2nd IF signal from the IF amplifier (Q29) is mixed with the BFO signal at the product detector (IC5) to demodulate the 2nd IF signal into an AF signal. The detected signal passes through the AF input mode selector switch (IC8).

In AM mode, the 2nd IF signal from Q29 passed through C121 is detected at D62 and passes through the AF input mode selector switch (IC8).

### 4-1-9 AF INPUT MODE SELECTOR SWITCH (MAIN UNIT)

The AF signal from a detector circuit or the optional AM · FM UNIT is applied to the AF input mode selector switch (IC8). IC8 consists of 4 analog switches and they are selected with a mode signal from IC15 and the squelch control signal. The AF signal is applied to the AF amp circuit.

#### IC8 AF INPUT MODE SELECTOR SWITCH

| MODE                    | ACTIVATING PIN NUMBERS | CONTROL PIN NUMBER |
|-------------------------|------------------------|--------------------|
| USB, CW                 | 2 → 1                  | 13                 |
| AM                      | 3 → 4                  | 5                  |
| FM                      | 10 → 11                | 12                 |
| ANY MODES (for S-meter) | 9 → 8                  | 6                  |

### AGC, S-METER AND SQUELCH CIRCUIT

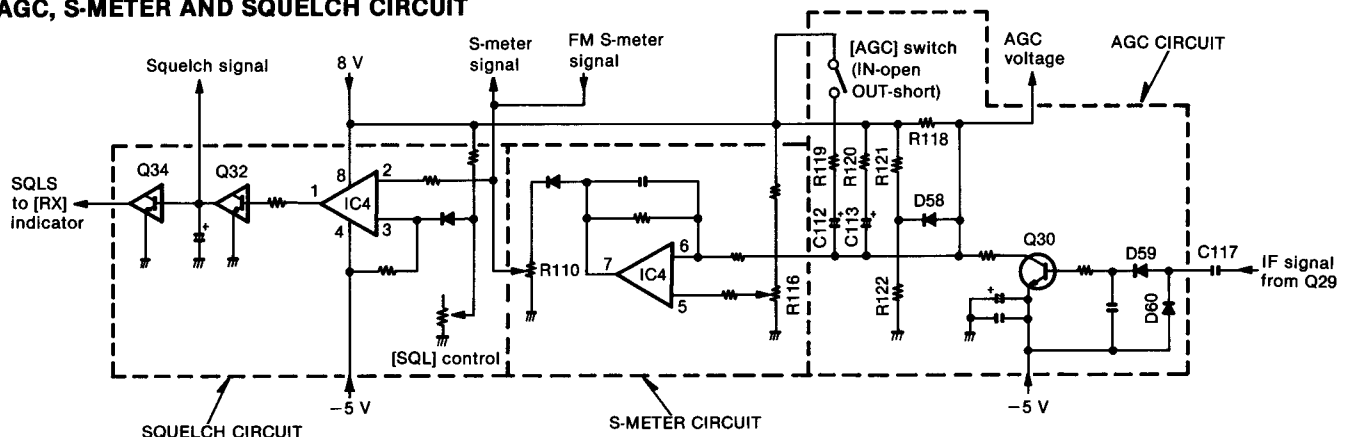


Fig. 3  
4 - 3

### 4-1-10 AF AMP CIRCUIT (MAIN UNIT)

The AF signal from the AF input mode selector switch is applied to the AF preamplifier (Q35, Q36). The CW sidetone signal is applied to Q36.

The output from the AF preamplifier is applied to the [AF] control (FRONT UNIT, R1b) and the 2.8 kHz cut-off active low-pass filter (Q37). The AF signal is power-amplified at IC9 to drive the speaker.

### 4-1-11 AGC AND S-METER CIRCUIT (MAIN UNIT)

The receiver gain is determined by the voltage on the AGC line (Q30, collector). When strong signals are received, the AGC circuit decreases the voltage on this line.

The IF signal from the IF amplifier (Q29) passes through C117, is detected at D59 and D60, and applied to the base of Q30. A time constant (C113, R120) is connected to the AGC line that determines the AGC release time.

The time constant is controlled by the [AGC] switch. When the [AGC] switch is pushed OUT, C112 and R119 are connected in parallel with the AGC line to obtain a slow AGC release time.

The AGC bias voltage is applied to the differential amplifier (IC4, pin 6) where the difference between the bias and reference voltages is detected. The resulting S-meter signal passes through the meter switching circuit (IC8) and is then applied to the meter on the front panel. The reference voltage is adjusted with R116. IC8 pins 8 and 9 are connected inside the IC in receiving.

The FM S-meter signal from the optional AM · FM UNIT is applied to the meter switching circuit (IC8) via D57. The signal is also applied to the squelch circuit (IC4 pin 2).

## 4-1-12 SQUELCH CIRCUIT (MAIN UNIT)

The squelch circuit mutes the audio output when the S-meter signal is lower than the [SQL] control setting level.

The S-meter signal from IC4 pin 7 is applied to the comparator (IC4 pin 2) to be compared to a threshold level controlled by the [SQL] control. The squelch control signal is applied to control terminals of the AF input mode selector switch (IC8).

When the S-meter signal is lower than the threshold level, the comparator turns "HIGH" and then Q32 turns OFF to deactivate the AF input mode selector switch. This signal is applied to Q34, turning OFF the [RX] indicator and is also applied to the [MIC] connector pin 4.

## 4-2 TRANSMITTER CIRCUITS

### 4-2-1 MIC AMPLIFIER (MAIN UNIT)

Audio signals from the [MIC] connector are applied to the [MIC] control and amplified at the mic amplifier (Q45). External modulation input from the [ACC(1)] socket pin 4 is also applied to Q45 via R255.

The AF signals from Q45 or CW keying signal is applied to the balanced modulator (IC6). Q44 cuts the signals from Q45 in CW or receiving.

### 4-2-2 BALANCED MODULATOR (MAIN UNIT)

Output signals from the mic amplifier or CW keying signal are applied to the balanced modulator circuit (IC6) to be converted to a 9 MHz IF signal using a BFO signal. The BFO signal, buffer-amplified at Q42, is applied to IC6 pin 7 as a carrier signal. IC6 outputs a double sideband signal and passes through a 9 MHz filter to create an SSB signal.

R177 and R179 adjust the balance level of IC6 for maximum carrier suppression. In CW mode, the CW keying signal upsets the balance to create a carrier signal.

### 4-2-3 IF CIRCUITS (MAIN UNIT)

The 9 MHz IF signal passes through one of the three 9 MHz filters where unwanted sideband or out-of-band signals are removed. The filters are selected with mode selecting signals and the "T8" voltage line. The optional CW narrow filter is not used in transmitting.

The resulting signal is amplified at Q22, and is then mixed with the 2nd LO signal to be converted to a 70.45 MHz IF signal at IC1. IC1 is used in receiving and transmitting. The FM signal from the optional AM · FM UNIT is amplified at Q22 and is then applied to IC1.

The 70.45 MHz IF signal is amplified at the IF amplifier (Q7) and is then converted to the displayed frequency at the balanced mixer (Q2, Q3).

The gates of the IF amplifiers (Q7, Q22) are controlled by ALC bias voltage from the ALC circuit. R89, connected to the gate of Q22, improves the temperature characteristics of the transmitter gain. R85 adjusts the transmitter gain.

### 4-2-4 RF CIRCUITS (MAIN AND PA UNITS)

The converted signal from Q2 and Q3 is applied to the bandpass filter where the unwanted LO signal emission is reduced. The converted signal is amplified at Q1, and is then applied to the PA UNIT via J11.

Incoming signals from the MAIN UNIT are amplified at the predrive amplifier (Q1), drive amplifier (Q2, Q3) and power amplifier (Q5, Q6) to obtain stable 100 W RF output power. The predrive amplifier is a class A amplifier with a Vcc of 13.8 V. The drive and power amplifiers are class AB push-pull amplifiers with a Vcc of 13.8 V. A stable bias voltage is applied to these amplifiers. D1 controls a bias voltage to the drive amplifier. Q4, D2 and D3 supply a bias voltage to the power amplifier.

A 0.012 Ω resistor (R26), inserted in the 13.8 V Vcc line, is provided for the Ic APC circuit. A voltage generated at both terminals of R26 is applied to the MAIN UNIT via the "ICH" and "ICL" signal line.

Thermal switch S1 and thermistor R32 detect the temperature of Q6 and Q5 respectively, and control the cooling fan speed.

| TEMPERATURE °C (°F) |          | Below 50<br>(122) | 50~90<br>(122~194) | Above 90<br>(194) |
|---------------------|----------|-------------------|--------------------|-------------------|
| THERMAL SWITCH (S1) |          | OFF               | OFF                | ON                |
| RESISTANCE OF R32   |          | HIGH              | LOW                | LOW               |
| COOLING FAN SPEED   | RECEIVE  | STOP              | LOW                | HIGH              |
|                     | TRANSMIT | LOW               |                    | HIGH              |

### COOLING FAN CONTROL CIRCUIT

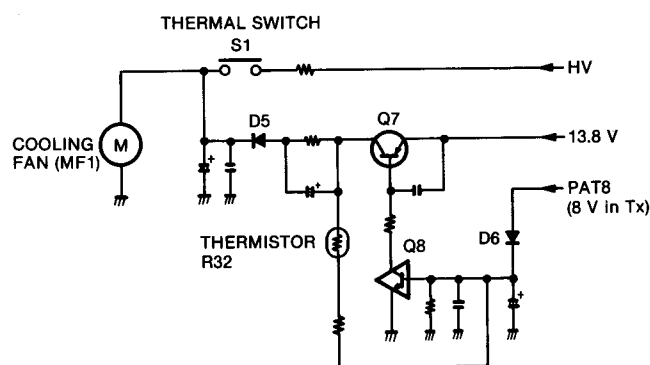


Fig. 4

### 4-2-5 RF FILTER CIRCUIT (PA UNIT)

The PA UNIT has 6 Chebyshev low-pass filters. The signal from the power amplifier (Q5, Q6), applied to one of the low-pass filters depending on the transmit frequency range, suppresses high harmonic components.

The filter switching voltage, obtained at the PLL UNIT, is applied to the PA UNIT via P7.

#### FREQUENCIES AND APPROPRIATE FILTERS

| FILTER | FREQUENCY RANGE (MHz) |
|--------|-----------------------|
| L1     | Below 2               |
| L2     | 2~4                   |
| L3     | 4~8                   |
| L4     | 8~15                  |
| L5     | 15~22                 |
| L6     | 22~30                 |

The filtered signal passes through the SWR detector circuit (L51) and is then applied to the antenna connector. The forward signal from L51 is detected at D7 and applied to the MAIN UNIT as the "FOR" voltage. The reflection signal from L51 is detected at D8 and applied to the MAIN UNIT as the "REF" voltage.

### 4-2-6 ALC CIRCUIT (MAIN UNIT)

The ALC (Auto Level Control) circuit stably controls the RF output power using the [RF POWER] control.

The "FOR" voltage from the PA UNIT is applied to IC11 pin 2 and IC10 pin 3. The "POC" voltage controlled by the [RF PWR] control is also applied to IC11 pin 3 as the reference voltage.

When the "FOR" voltage exceeds the "POC" voltage, ALC bias voltage from IC11 pin 1 controls the IF amplifiers to reduce the output power until the "FOR" and "POC" voltages are equalized.

In AM mode, IC11 operates as an averaging ALC amplifier, because a capacitor on the optional AM · FM UNIT (C51) is connected to the cathode of D76. Q54 turns ON and the "POC" voltage is shifted for 40 W AM output power (maximum).

The ALC bias voltage from IC11 pin 1 is also applied to the inversion-amplifier (IC11 pin 6) to control an intensity of the [TX] indicator, showing the ALC level.

An external ALC input from the [ALC] jack is applied to the buffer amplifier (Q53). ALC operation is identical to that of the internal ALC.

### 4-2-7 APC CIRCUITS (MAIN UNIT)

The APC circuits protect the final transistors from high SWR and excessive current. The "REF" voltage from the PA UNIT is applied to Q56. When the "REF" voltage exceeds the reference voltage, determined by R203 and R204, Q56 turns ON and the "POC" voltage is shifted for 12 W output power.

The "ICH" and "ICL" voltages are applied to the IC APC amplifier (IC10, pins 5 and 6) and then to the ALC bias voltage line to prevent excessive current flow.

### 4-2-8 CW KEYING CIRCUIT (MAIN UNIT)

When the CW key is closed, the "KEY" signal line becomes "LOW." Q38 outputs 8 V to control break-in operation, sidetone signal and transmit signal.

When the [BK IN] switch is pushed IN, 8 V from Q38 charge C252 and Q26 is turned ON, turning ON Q52. Q52 grounds the SEND line for transmitting. The [DELAY] control (R244) adjusts the transmit release delay time.

The 8 V from Q38 charges C249 and D91 is turned OFF, disconnecting C249 from Q40. Q40 then oscillates a sidetone signal. R268 prevents sidetone click noise.

The 8 V from Q38 is applied to a time constant and then to the balanced modulator (IC6) to create a carrier signal. R241 in the time constant adjusts a transmit delay timing for 12 msec.

### ALC CIRCUIT

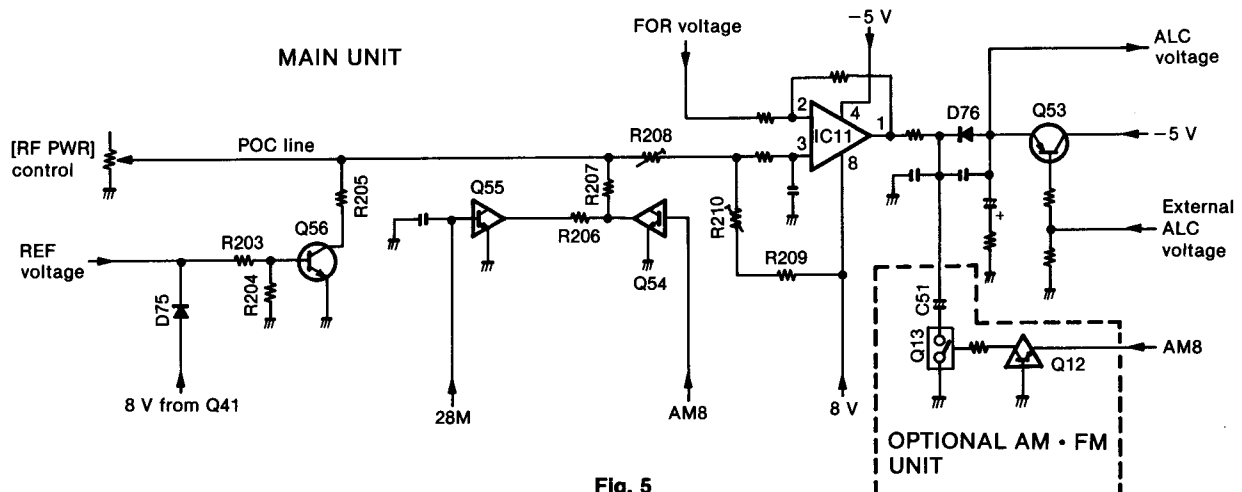


Fig. 5

While no CW transmit IF signal exists, Q39 and Q23 turn the switching diode (D35) OFF to ensure transmit isolation.

## 4-2-9 OUTPUT POWER METER CIRCUITS (MAIN UNIT)

The "FOR" voltage from the PA UNIT is applied to the Po meter amplifier (IC10 pin 3) and then to the meter. R189 and C261 are used for peak power measurement.

## 4-2-10 T/R SWITCHING CIRCUIT (MAIN UNIT)

When the PTT or [TRANSMIT] switch is set to transmit, IC13 pin 10 and IC13 pin 3 are "LOW." At this time, Q49 turns ON, and 0 V is present on the "R8" voltage line. Q50 turns OFF, and there is 8 V present on the "T8" voltage line.

When the PTT or [TRANSMIT] switch is set to receive, IC13 pin 10 and IC13 pin 3 are "HIGH." At this time, Q49 turns OFF, and 8 V is present on the "R8" voltage line. Q50 turns ON, and there is 0 V present on the "T8" voltage line.

When PLL data or the operating mode is changed, the "DNB" signal line becomes "LOW," turning OFF the T8 – preventing unwanted transmission.

## 4-3 PLL CIRCUITS

### 4-3-1 GENERAL DESCRIPTION

The PLL UNIT generates a 1st LO signal (70.9515~100.4515 MHz variable) and 2nd LO signal (61.44 MHz fixed) used in the MAIN UNIT. The IC-725 uses a dual loop PLL system. A main loop PLL uses 4 VCO circuits for all HF band coverage within 512 kHz steps. A sub loop PLL uses a DDS (Direct Digital Synthesizer) system for 512 kHz coverage within 10 Hz steps. The DDS system provides a rapid lockup time and high quality frequency oscillation.

### 4-3-2 REFERENCE OSCILLATOR CIRCUIT (PLL UNIT)

A 30.72 MHz reference frequency is produced by the oscillator Q33 and X2. The reference frequency, buffer-amplified at Q34, is divided by 2 at IC15 and is then applied to the PLL circuit as the PLL reference frequency.

The signal oscillated at Q33 is multiplied by 2 at Q36. The resulting 61.44 MHz signal is filtered at the bandpass filter and is then applied to the MAIN UNIT via P4 as the 2nd LO signal.

### 4-3-3 MAIN LOOP (PLL UNIT)

The main loop uses a PLL IC (IC13) which contains a programmable divider, phase detector, data shift register and data latch circuits. The main loop generates 70.9515~100.4515 MHz signals in 512 kHz steps.

Because the sub loop produces 10 Hz steps, the PLL produces a 30 MHz frequency range in 10 Hz steps.

The oscillated signal at one of the 4 VCOs (Q15, Q17, Q19, Q21; see Section 4-3-4 for details) is amplified at Q23. The signal is mixed with the sub loop output ( $f_{LO}$ : 62.05~62.56199 MHz) at IC16. Q23 is an isolator which ensures that the mixer input does not affect the VCO output.

The mixed signal is amplified at Q27 and is then filtered at the low-pass filter (L23~L25, C92, C93, C99~C103). The filtered signal, amplified at Q26, is divided by 4 at IC14 and is then applied to the PLL IC (IC13).

The phase of the divided signal at IC14, detected at the PLL IC (IC13) using a reference frequency ( $f_{REF}$ ) of 512 kHz, is then output from pin 17. The 512 kHz frequency is obtained from the reference oscillator (Q33). 30.72 MHz oscillated at Q33, is divided by 2 at IC15 and divided by 30 at the programmable divider section of IC13.

The phase detected signal is then converted to the lock voltage at the loop filter (Q12~Q14), and applied to the VCO. Thus, the VCO output (PLL output) is locked to produce stable oscillation.

The PLL oscillation frequency is obtained by the following calculation:

$$f_V = f_{LO} + N_T \times f_{REF}$$

$f_V$  : Main loop output  
 $f_{LO}$  : Sub loop output  
 $N_T$  : Dividing ratio from the CPU  
 $f_{REF}$  : Reference frequency (512 kHz)

### 4-3-4 VCO CIRCUIT (PLL UNIT)

The transceiver's C/N ratio is determined by the VCO and the loop filter. 4 VCO circuits keep the low noise and reduce spurious emissions. Q16, Q18, Q20 and Q22 are VCO switches which select the operating VCO with "VCO1"~"VCO4" lines.

### 4-3-5 SUB LOOP (PLL UNIT)

The sub loop uses the DDS system that generates 62.05~62.56199 MHz signals in 10 Hz steps.

The oscillated signal at the VCO (Q29) is buffer-amplified at Q30 and mixed with the 2nd LO signal (61.44 MHz) at IC17. The resulting signal passes through the low-pass filter, is amplified at Q32, and is then applied to the DDS UNIT.

The output pulse-type signal from the DDS UNIT passes through the loop filter (R133, R134, C114, C115, L42) where it is converted into a DC signal (lock voltage). The lock voltage is applied to the VCO to lock the oscillating frequency.

## PLL CIRCUIT BLOCK DIAGRAM

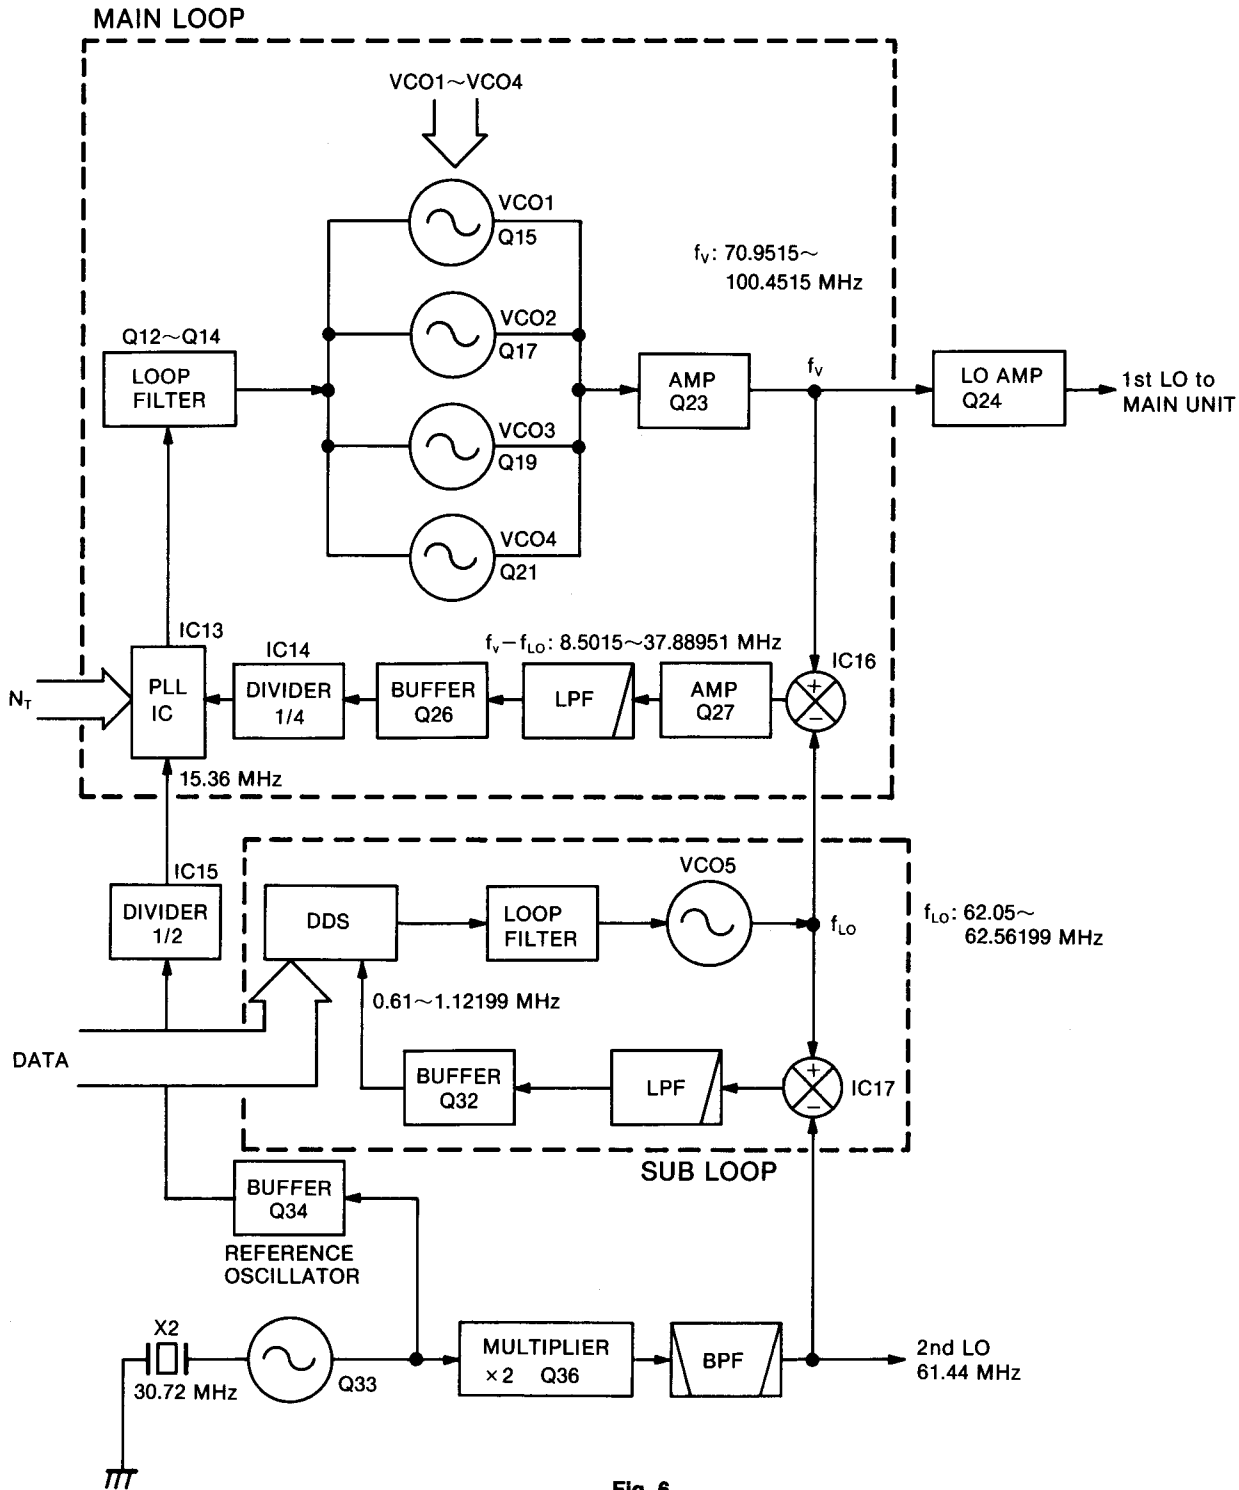


Fig. 6

## 4-4 LOGIC CIRCUITS

### 4-4-1 BAND SELECTION DATA (PLL UNIT)

To select the correct bandpass filter, the low-pass filter and VCOs on the MAIN and PLL UNITS, the CPU outputs the following data.

R29~R40 and D29~D35 convert the "B0"~"B7" signals into a band voltage (0~7.5 V) for external equipment.

| FREQUENCY (MHz) | BPF | BAND VOLTAGE | LPF | VCO  |
|-----------------|-----|--------------|-----|------|
| 0.5~1.599       | B0  | 7.5 V        | L1  | VCO1 |
| 1.6~1.999       | B1  |              | L2  |      |
| 2.0~3.999       | B2  |              | L3  |      |
| 4.0~7.999       | B3  |              | L4  |      |
| 8.0~10.999      | B4  | 4.1 V        | L5  | VCO2 |
| 11.0~14.999     | B5  | 3.2 V        |     |      |
| 15.0~21.999     | B6  | 2.2 V        | L6  | VCO3 |
| 22.0~30.0       | B7  |              |     | VCO4 |

#### 4-4-2 CPU (PLL UNIT)

The CPU (IC8) contains an 8-bit CMOS CPU, 16k-byte ROM and 256-byte RAM. The CPU controls operating frequency, mode and the function display, etc. The memory contents are stored in the CPU using a lithium backup battery for more than 5 years.

The Icom CI-V network system allows that the IC-725 can be remotely controlled by a personal computer using an RS-232C signal line.

#### 4-4-3 RIT CIRCUIT (PLL UNIT)

IC12 is an A/D converter which outputs 8-bit serial data regarding analog input voltage. A voltage, controlled by the [RIT] control, is applied to IC12 pin 4 and the resulting serial data is applied to the CPU matrix Y4 → DB4.

#### 4-4-4 KEY MATRIX

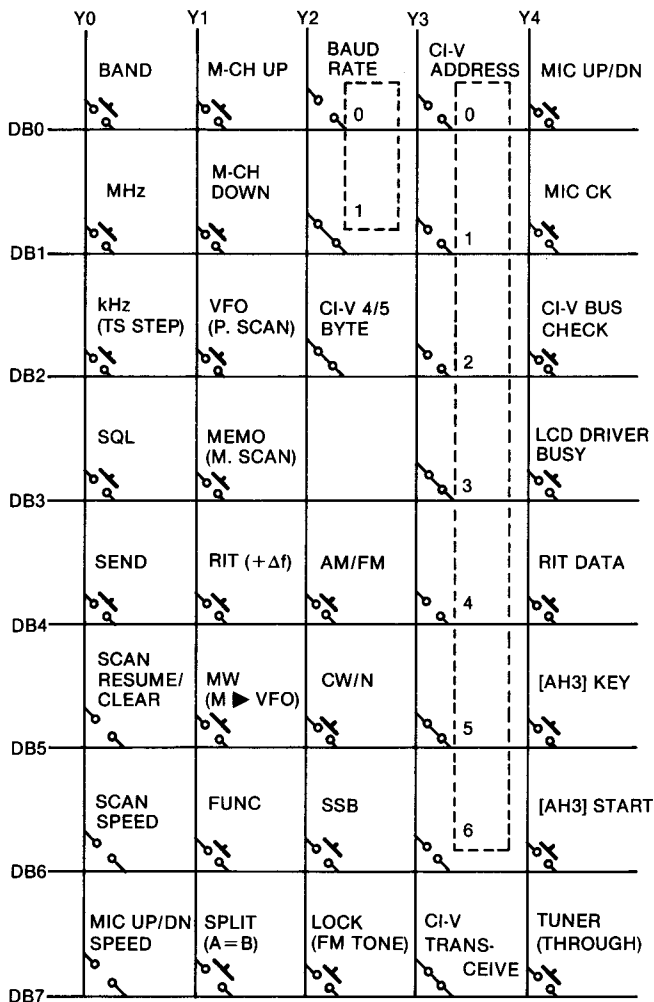


Fig. 7

#### 4-4-5 PARALLEL/SERIAL CONVERTER (PLL UNIT)

IC11 is a parallel/serial converter IC. Parallel data from the CPU are converted into serial data to transfer the PLL N-data, DDS N-data, data for LCD driver, etc.

When the power is turned ON, the CPU also outputs programmable divider data and a control signal for universal ports to the PLL IC (IC13).

#### 4-5 REGULATOR CIRCUITS

Either 8, 5 or -5 V DC are supplied from corresponding regulator circuits. 8, 5 and -5 V DC are regulated at the following circuits using 13.8 V DC.

##### (1) 5 V REGULATOR (PLL UNIT)

5 V DC are regulated by the three-terminal voltage regulator (IC10).

##### (2) 8 V REGULATOR (MAIN UNIT)


8 V DC are regulated by the three-terminal voltage regulator (IC14).

##### (3) -5 V REGULATOR (PLL UNIT)


IC6 generates a negative pulse-type voltage by converting the DC input to AC voltages (approx. 6.7 kHz) as a multivibrator. The voltage is rectified at D8 and D9, regulated by a Zener diode (D10) and C13, and is then applied to the MAIN UNIT.

# SECTION 5 MECHANICAL PARTS AND DISASSEMBLY

## 5-1 FRAME DISASSEMBLY

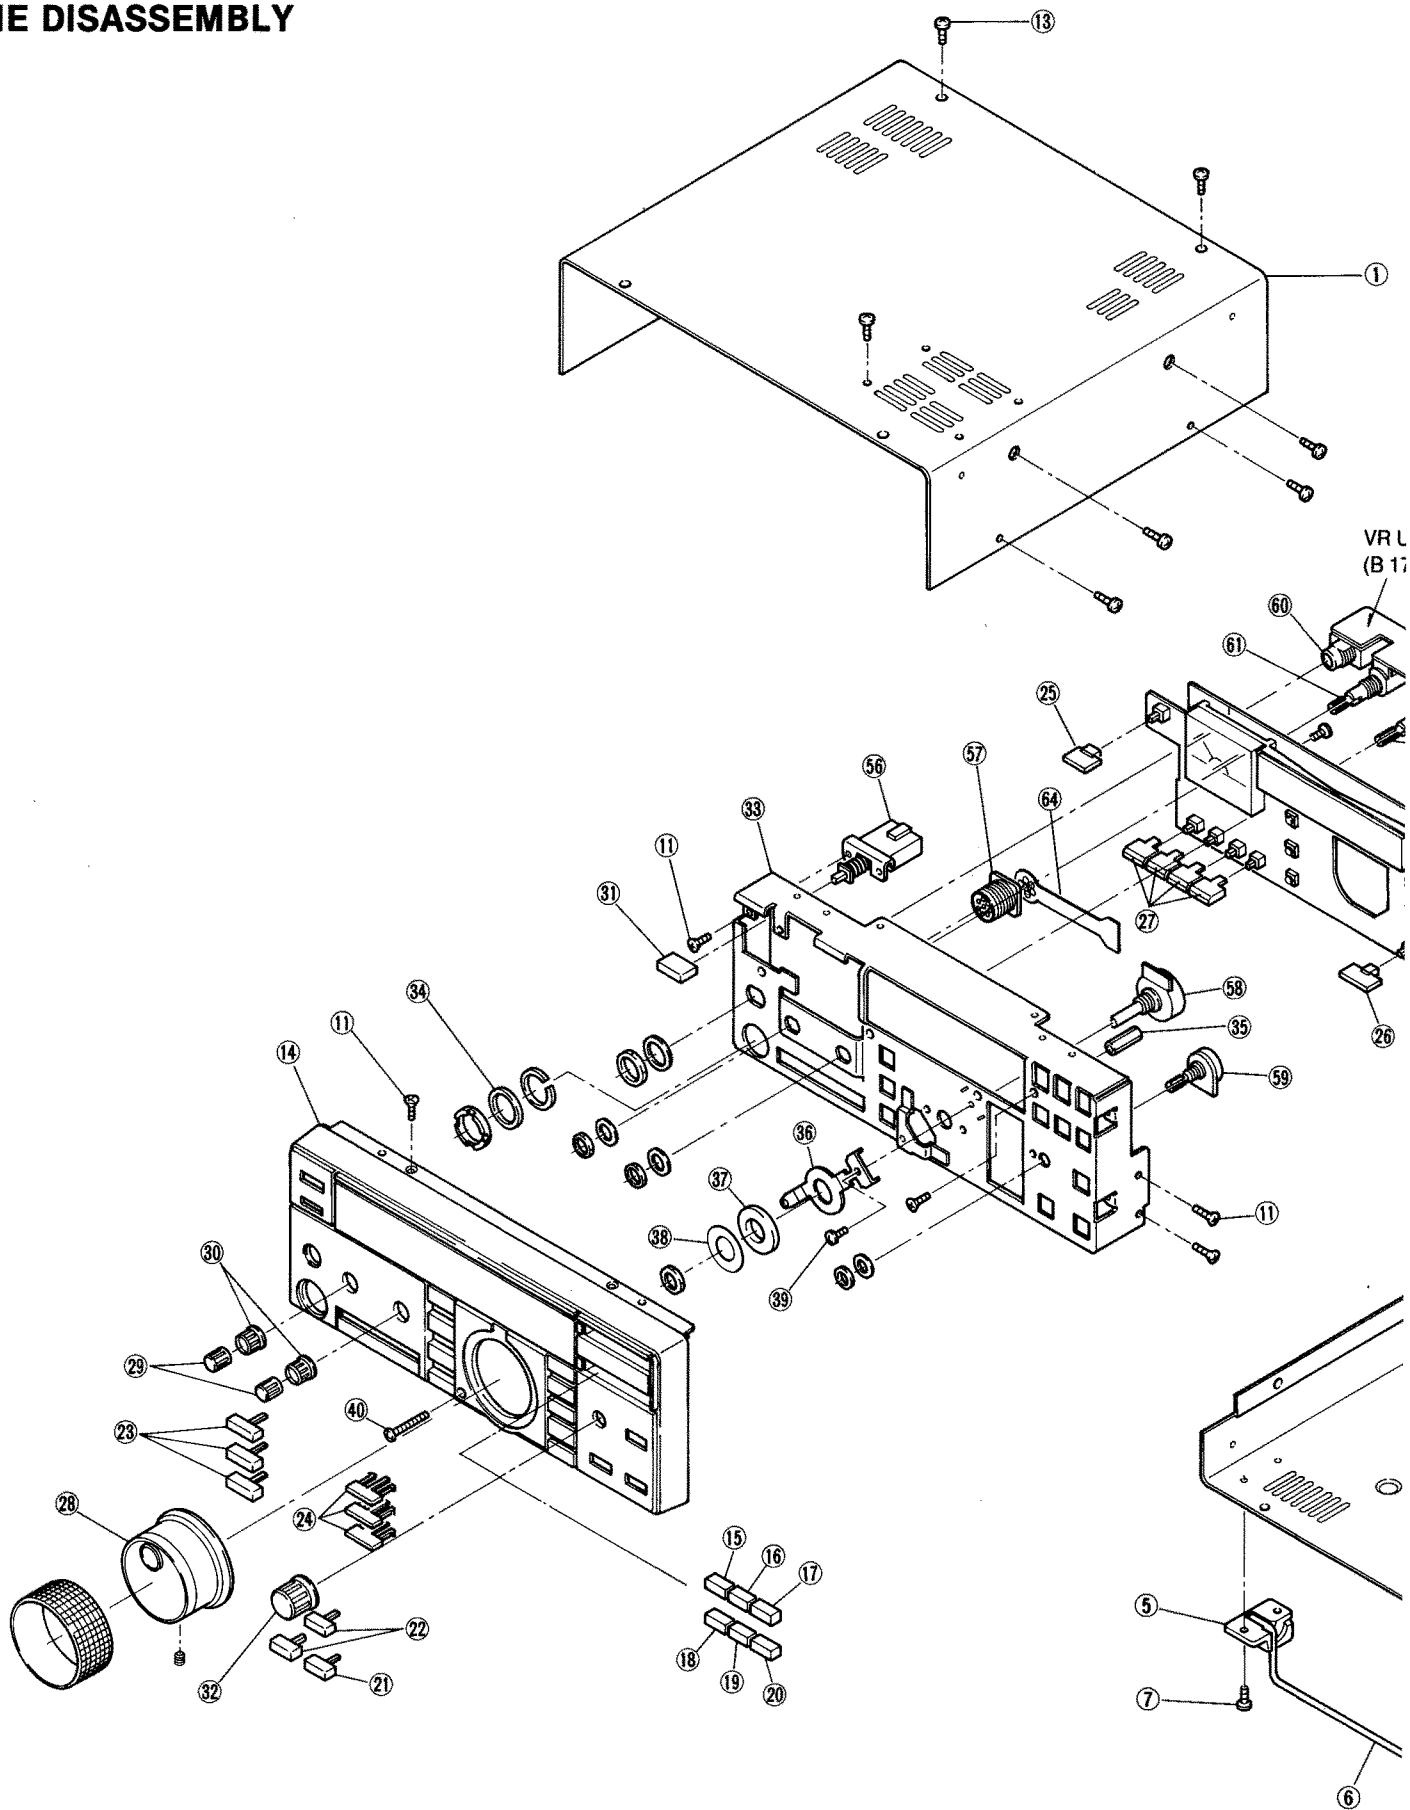



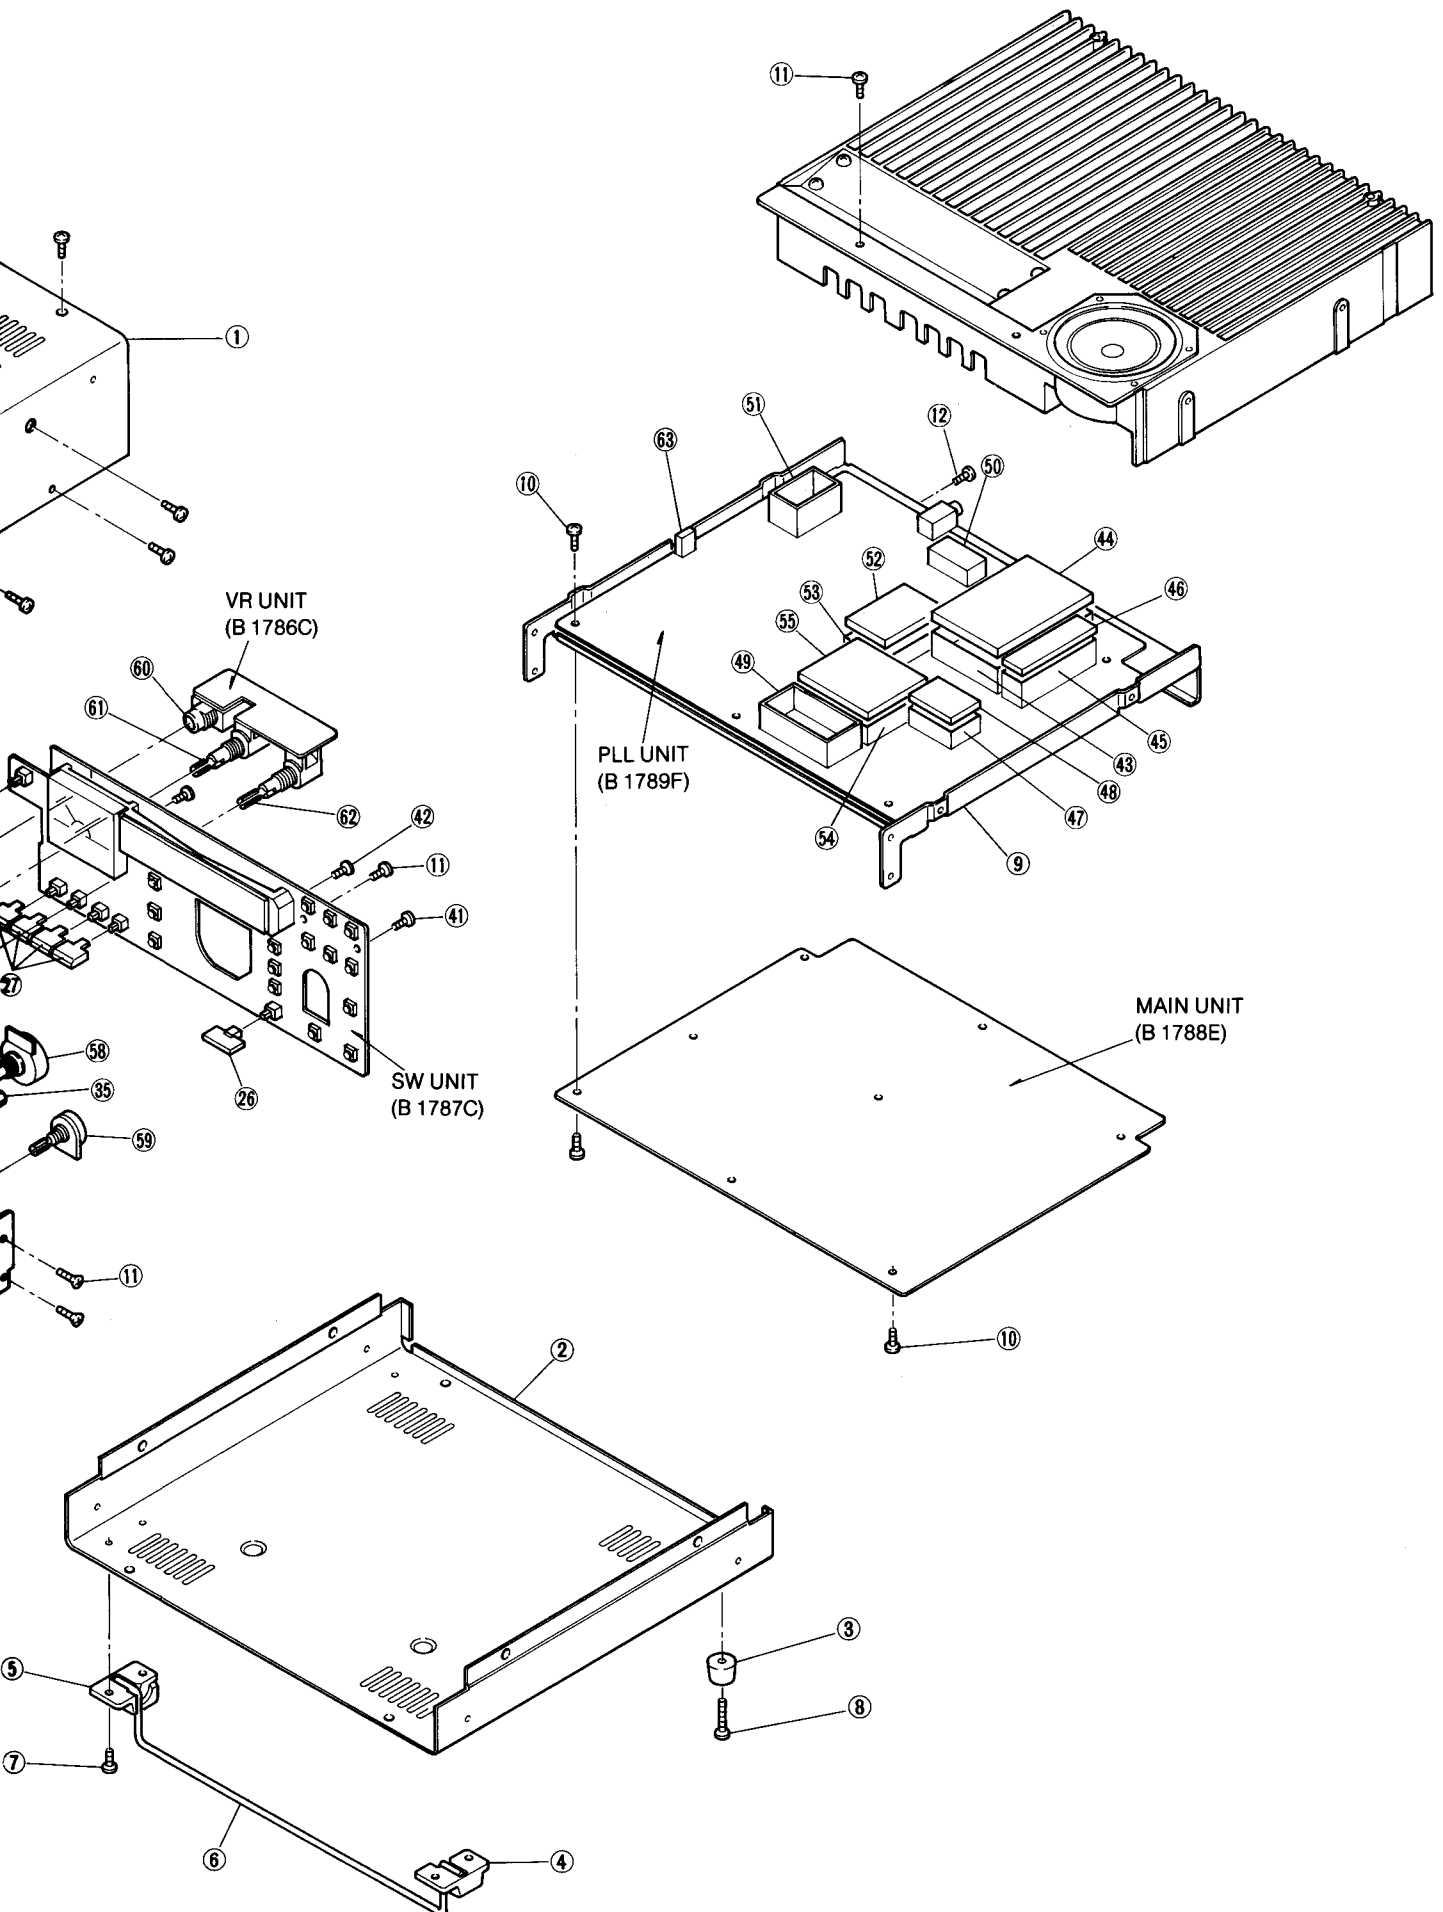


• FRAME DISASSEMBLY

| LABEL NUMBER | ORDER NO.  | DESCRIPTION                                    | QTY. | LABEL NUMBER | ORDER NO.  | DESCRIPTION                                     | QTY. |
|--------------|------------|--|------|--------------|------------|---|------|
| ①            | 8110003270 | Top cover                                      | 1    | ③⑤           | 8930000720 | Thread spacer (V)                               | 4    |
| ②            | 8110003280 | Bottom cover                                   | 1    | ③⑥           | 8930013990 | 610 Brake plate                                 | 1    |
| ③            | 8930002900 | Rubber foot (A)                                | 2    | ③⑦           | 8930014030 | 610 Brake pat                                   | 1    |
| ④            | 8930005790 | Foot (A)                                       | 1    | ③⑧           | 8930013940 | 610 Brake sheet                                 | 1    |
| ⑤            | 8930005800 | Foot (B)                                       | 1    | ③⑨           | 8810001110 | PH B0 M3 × 6                                    | 1    |
| ⑥            | 8010001520 | Stand (C)                                      | 1    | ④⑩           | 8810005470 | PH M2.6 × 14 ZK                                 | 1    |
| ⑦            | 8810005520 | PH B1 M3 × 8 ZK                                | 4    | ④①           | 8810001650 | PH FT M3 × 6                                    | 9    |
| ⑧            | 8810005540 | PH B1 M4 × 10                                  | 2    | ④②           | 8810001320 | PH B1 M2.6 × 6 Ni                               | 4    |
| ⑨            | 8010007851 | 610 Chassis-1                                  | 1    | ④③           | 8510001330 | 79 shield case                                  | 1    |
| ⑩            | 8810001350 | PH B1 M3 × 6                                   | 16   | ④④           | 8510001340 | 79 shield case cover                            | 1    |
| ⑪            | 8810002160 | FH M3 × 5                                      | 16   | ④⑤           | 8510001060 | Shield case                                     | 1    |
| ⑫            | 8810003670 | ICOM screw A 6                                 | 2    | ④⑥           | 8510001740 | Shield case cover                               | 1    |
| ⑬            | 8810005510 | FH M3 × 6 ZK BS                                | 16   | ④⑦           | 8510000881 | 194 VCO case-1                                  | 1    |
| ⑭            | 8210004670 | 610 Front panel (B)                            | 1    | ④⑧           | 8510003460 | 194 VCO case cover (A)                          | 1    |
| ⑮            | 8610004640 | Button K119 [VFO]                              | 1    | ④⑨           | 8510000230 | 220 shield case                                 | 1    |
| ⑯            | 8610004650 | Button K119 (A) [SPLIT]                        | 1    | ⑤⑩           | 8510002200 | VCO case  | 1    |
| ⑰            | 8610004660 | Button K119 (B) [UP]                           | 1    | ⑤①           | 8510000881 | 194 VCO case-1                                  | 1    |
| ⑱            | 8610004670 | Button K119 (C) [MEMO]                         | 1    | ⑤②           | 8510002690 | PA shield case (B)                              | 1    |
| ⑲            | 8610004680 | Button K119 (D) [MW]                           | 1    | ⑤③           | 8510004360 | PA shield case (B) cover (A)                    | 1    |
| ⑳            | 8610004690 | Button K119 (E) [DOWN]                         | 1    | ⑤④           | 8510005310 | DDS shield case                                 | 1    |
| ㉑            | 8610004700 | Button K119 (F) [FUNC]                         | 1    | ⑤⑤           | 8510005320 | DDS shield case cover                           | 1    |
| ㉒            | 8610004710 | Button K119 (G) [RIT, TUNER]                   | 2    | ⑤⑥           | 2230000120 | Switch [POWER] SDDSA3159A                       | 1    |
| ㉓            | 8610004720 | Button K120 [SSB, CW/N, AM/FM]                 | 3    | ⑤⑦           | 6510000190 | Connector [MIC] FM214-8SS (P)                   | 1    |
| ㉔            | 8610004730 | Button K121 [kHz, MHz, BAND]                   | 3    | ⑤⑧           | 7600000100 | Rotary encoder EC24B50B0013A                    | 1    |
| ㉕            | 8610003850 | Button K98 [TRANSMIT]                          | 1    | ⑤⑨           | 7210000570 | Variable resistor [RIT]                         | 1    |
| ㉖            | 8610004741 | Button K122-1 [LOCK]                           | 1    | ⑥⑩           | 6450000810 | Connector [PHONES]<br>HLJ4306-01-3070           | 1    |
| ㉗            | 8610004751 | Button K123-1 [NB, ATT, PRE, AGC]              | 4    |              |            |   |      |
| ㉘            | 8610004760 | Dial N104 (A)<br>(incl. rubber ring and screw) | 1    | ⑥①           | 7210001320 | Variable resistor [AF/SQL]<br>RK124221002DA     | 1    |
| ㉙            | 8610004770 | Knob N45C [AF, MIC]                            | 2    | ⑥②           | 7210001550 | Variable resistor [MIC/RF PWR]<br>RK1242210032A | 1    |
| ㉚            | 8610000500 | Knob N69 [SQL, RF PWR]                         | 2    |              |            |   |      |
| ㉛            | 8610001560 | Button K42 [POWER]                             | 1    | ⑥③           | 7210001530 | Variable resistor [RIT]<br>RK09K1110AEGA        | 1    |
| ㉜            | 8610004780 | Knob N87 (B) [RIT]                             | 1    |              |            |   |      |
| ㉝            | 8010007860 | 610 Sub chassis                                | 1    | ⑥④           | 0910006330 | Flexible cable P.C. Board B 792                 | 1    |
| ㉞            | 8930003200 | Spacer (P)                                     | 1    |              |            |   |      |

**Screw abbreviations**

PH: Pan head    FH: Flat head    B0, B1, FT: Self-tapping screw    ZK: Black    Ni: Nickel  
BS: Brass

# 5-2 PA UNIT AND ACCESSORIES

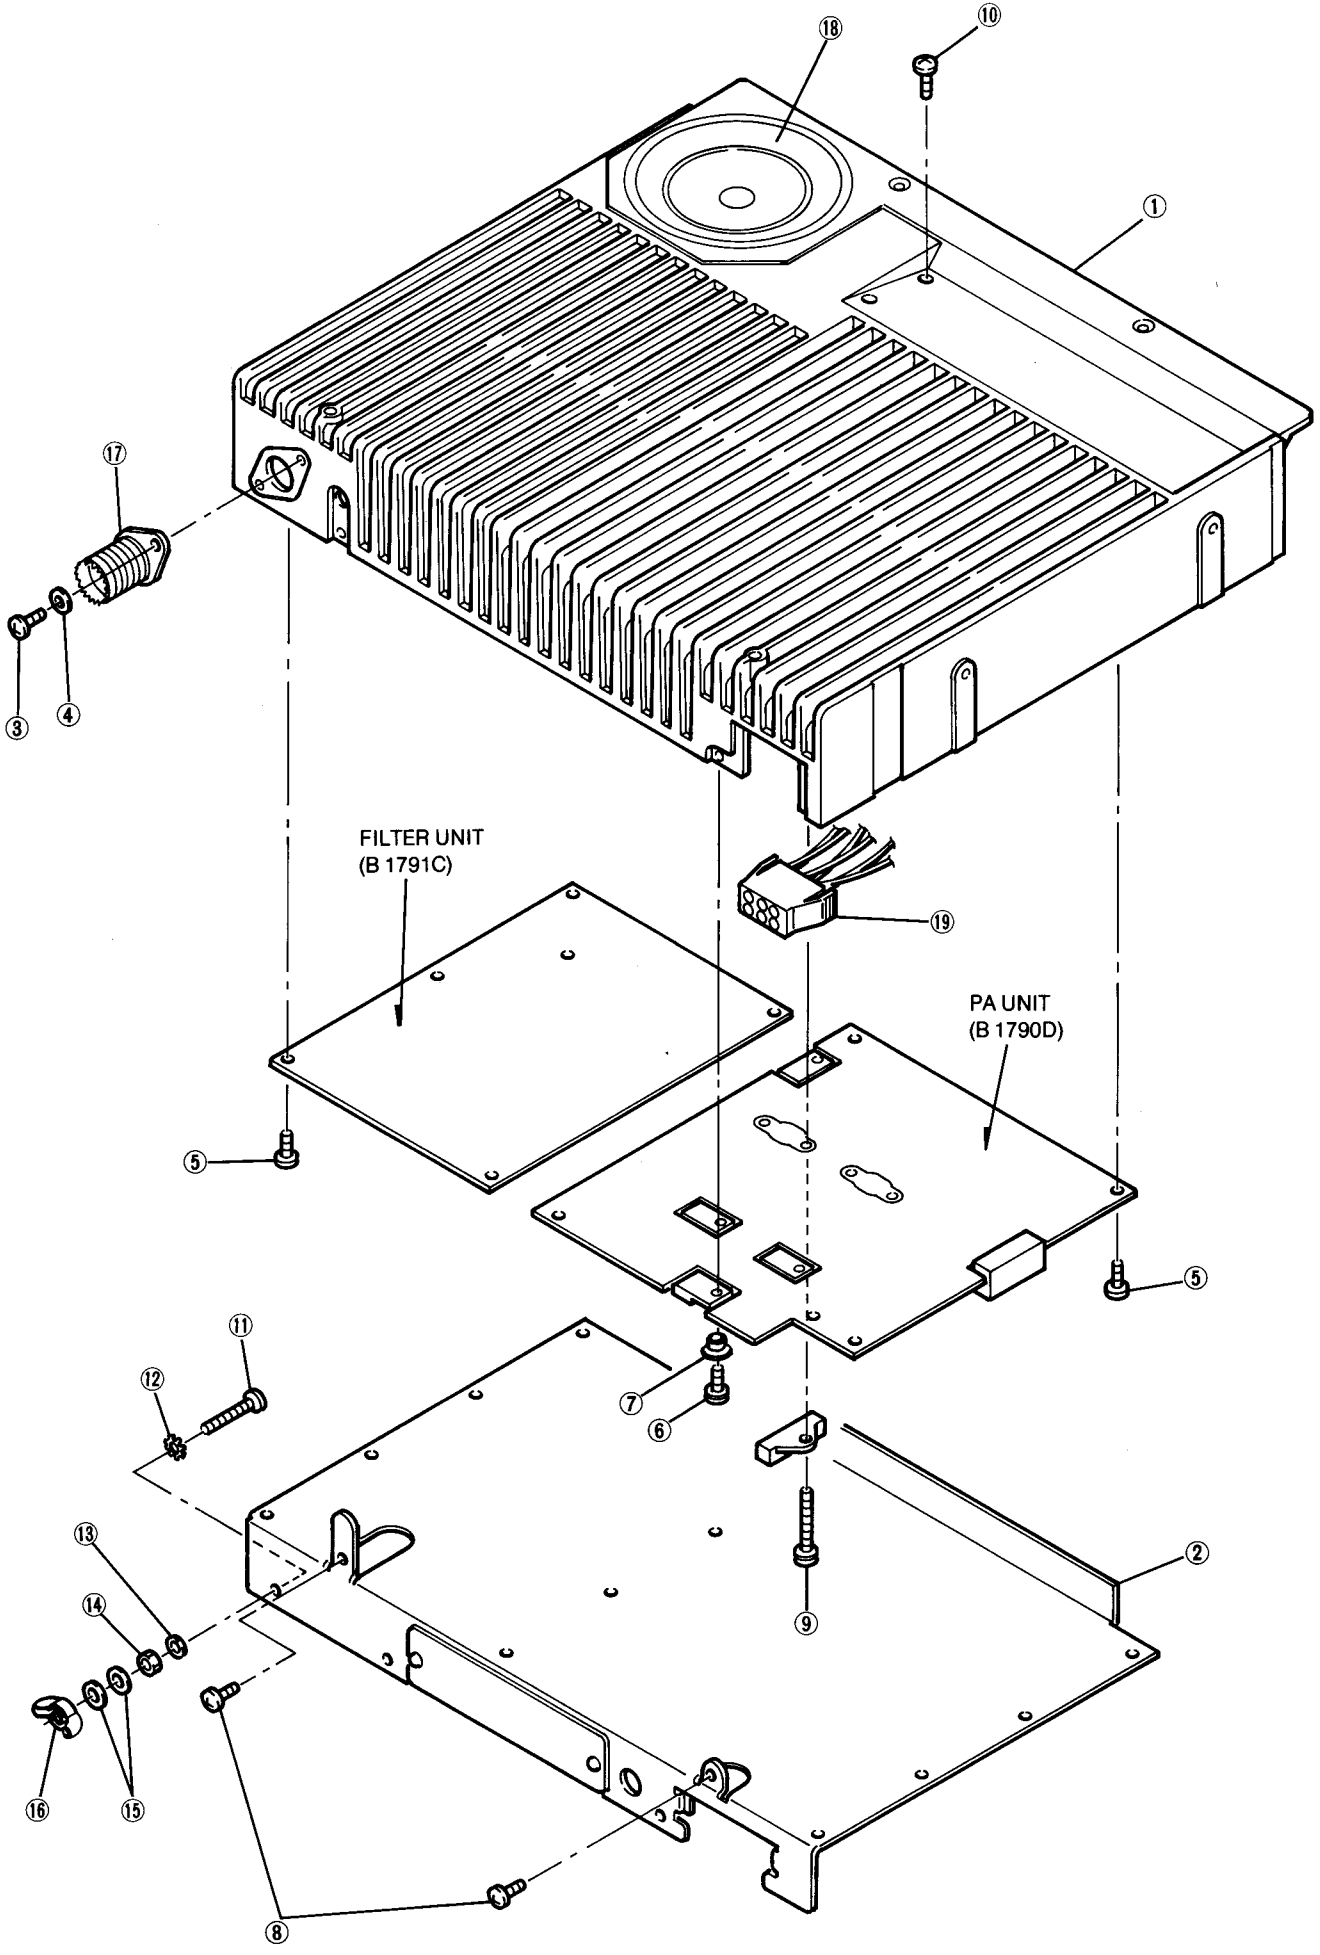

• PA UNIT


| LABEL NUMBER | ORDER NO.  | DESCRIPTION              | QTY. |
|--------------|------------|--------------------------|------|
| ①            | 8410000781 | 401 Heatsink-1           | 1    |
| ②            | 8510005462 | PA cover-2               | 1    |
| ③            | 8810001910 | PH M3×6 Ni BS            | 2    |
| ④            | 8850000420 | Spring washer M3 Ni      | 2    |
| ⑤            | 8810001350 | PH B1 M3×6               | 24   |
| ⑥            | 8810003170 | Set screw A M3×8         | 7    |
| ⑦            | 6910000310 | Bushing B312D            | 1    |
| ⑧            | 8810003670 | ICOM screw A6            | 2    |
| ⑨            | 8810003210 | Set screw A M3×15        | 1    |
| ⑩            | 8810000220 | PH M3×5                  | 4    |
| ⑪            | 8810001980 | PH M5×16 Ni BS           | 1    |
| ⑫            | 8850000590 | Star washer M5           | 1    |
| ⑬            | 8850000440 | Spring washer M5 Ni      | 1    |
| ⑭            | 8830000210 | Nut M5 Ni BS             | 1    |
| ⑮            | 8850000150 | Flat washer M5 Ni BS     | 2    |
| ⑯            | 8830000360 | Wing nut M5 Ni           | 1    |
| ⑰            | 6510004880 | ANT connector MR-DS-E 01 | 1    |
| ⑱            | 2510000040 | Speaker C065K12I0810     | 1    |
| ⑲            | 6510003780 | DC power socket LLR-6    | 1    |

**Screw abbreviations** PH: Pan head B1: Self-tapping screw Ni: Nickel BS: Brass


• ACCESSORIES

| LABEL NUMBER | ORDER NO.        | DESCRIPTION              | QTY. |
|--------------|------------------|--------------------------|------|
| ①            | Optional product | DC power cable OPC-025 A | 1    |
| ②            | Optional product | Hand microphone HM-12    | 1    |
| ③            | 5210000080       | Spare fuse FGB 20A       | 1    |
| ④            | 5210000130       | Spare fuse FGB 4A        | 1    |
| ⑤            | 8810005500       | FH B1 M4×12 CR           | 2    |
| ⑥            | 8810001600       | PH ST M3×6               | 4    |


**Screw abbreviations** PH: Pan head FH: Flat head  
B1, ST: Self-tapping screw

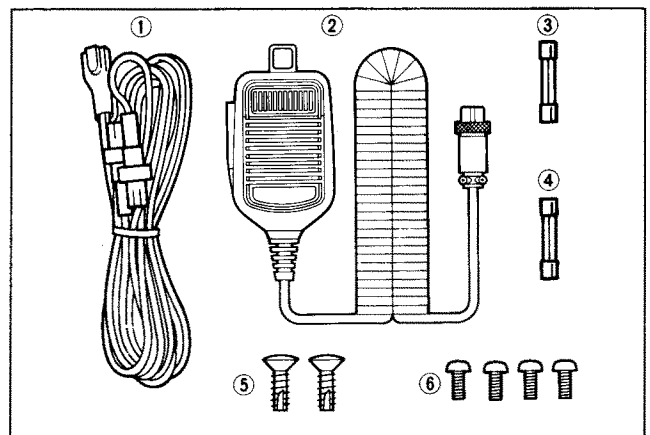


### 5-3 FRONT AND PLL UNITS CONNECTOR ASSEMBLY

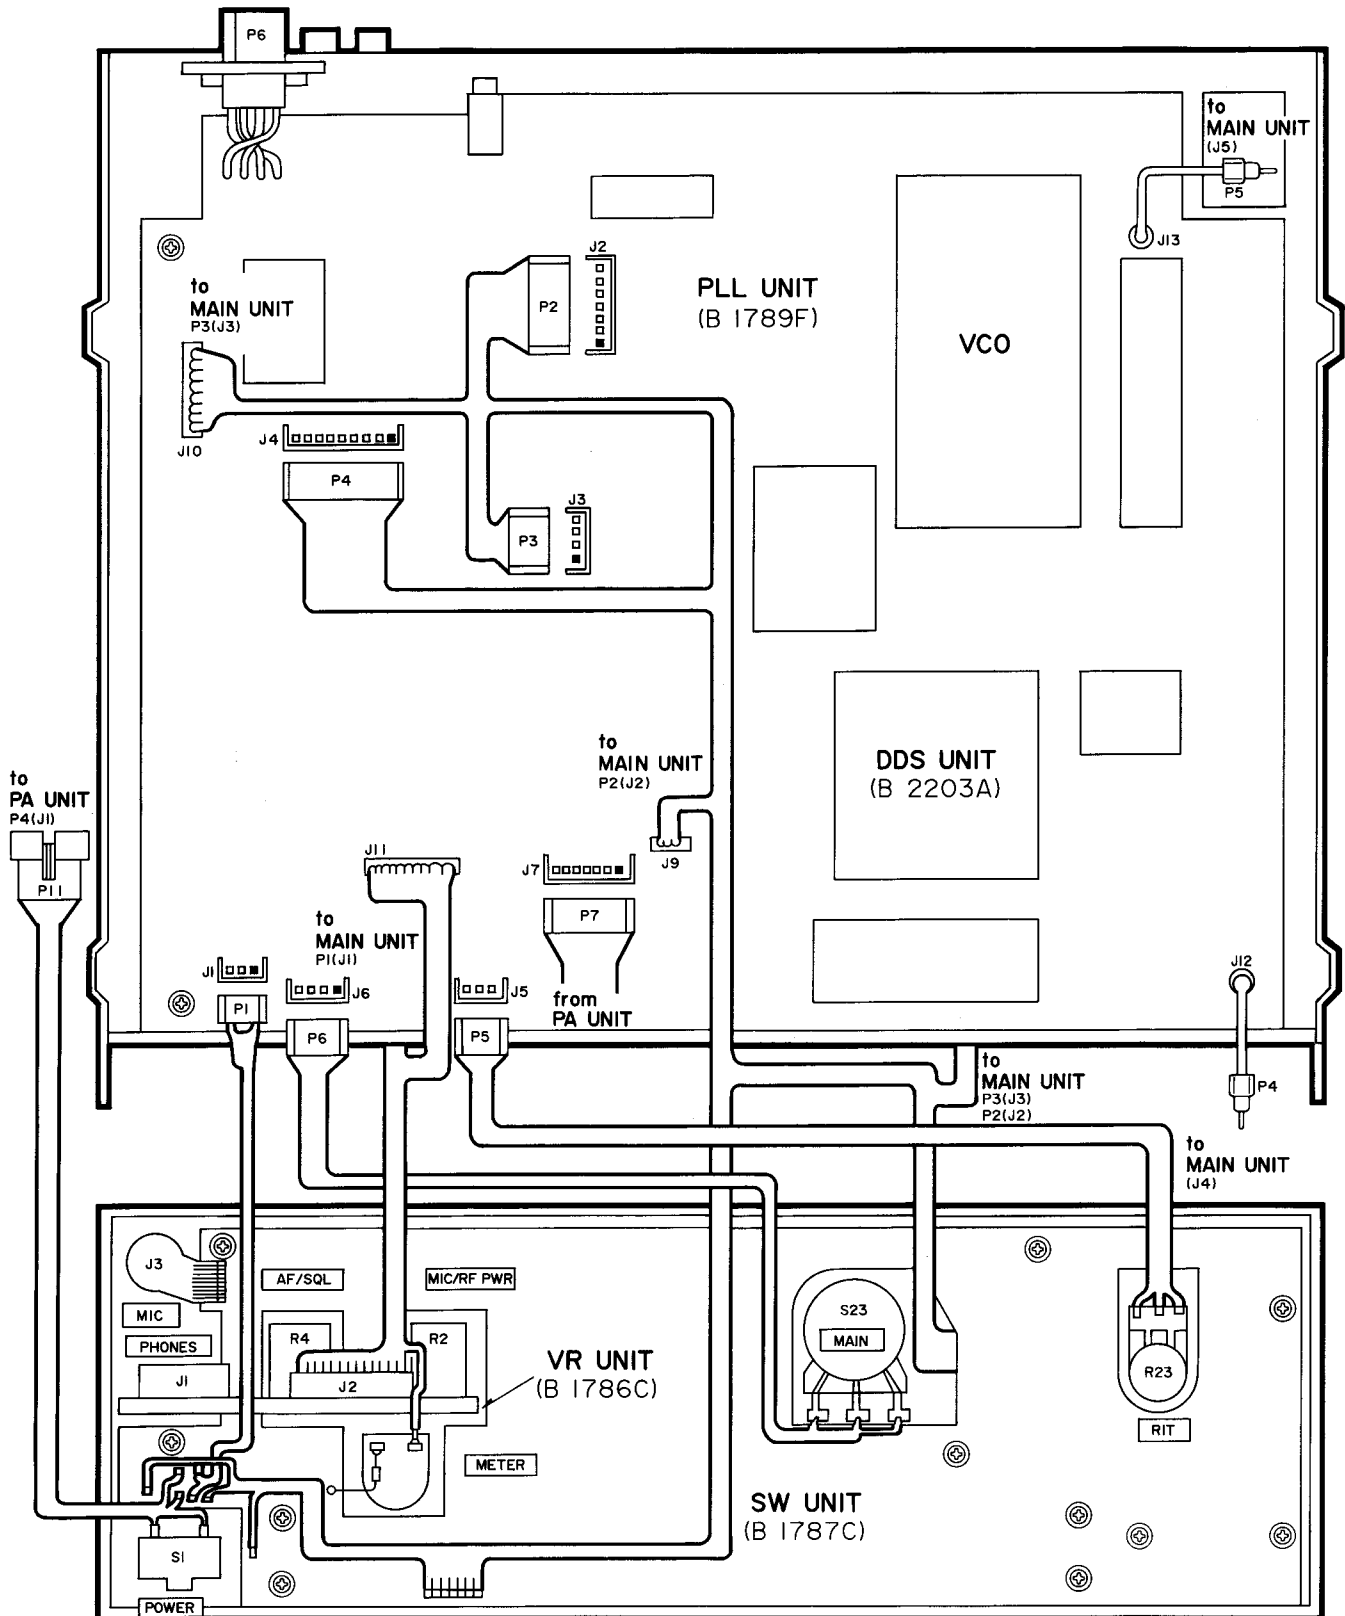

# 5-4 FRONT AND MAIN UNITS CONNECTOR ASSEMBLY

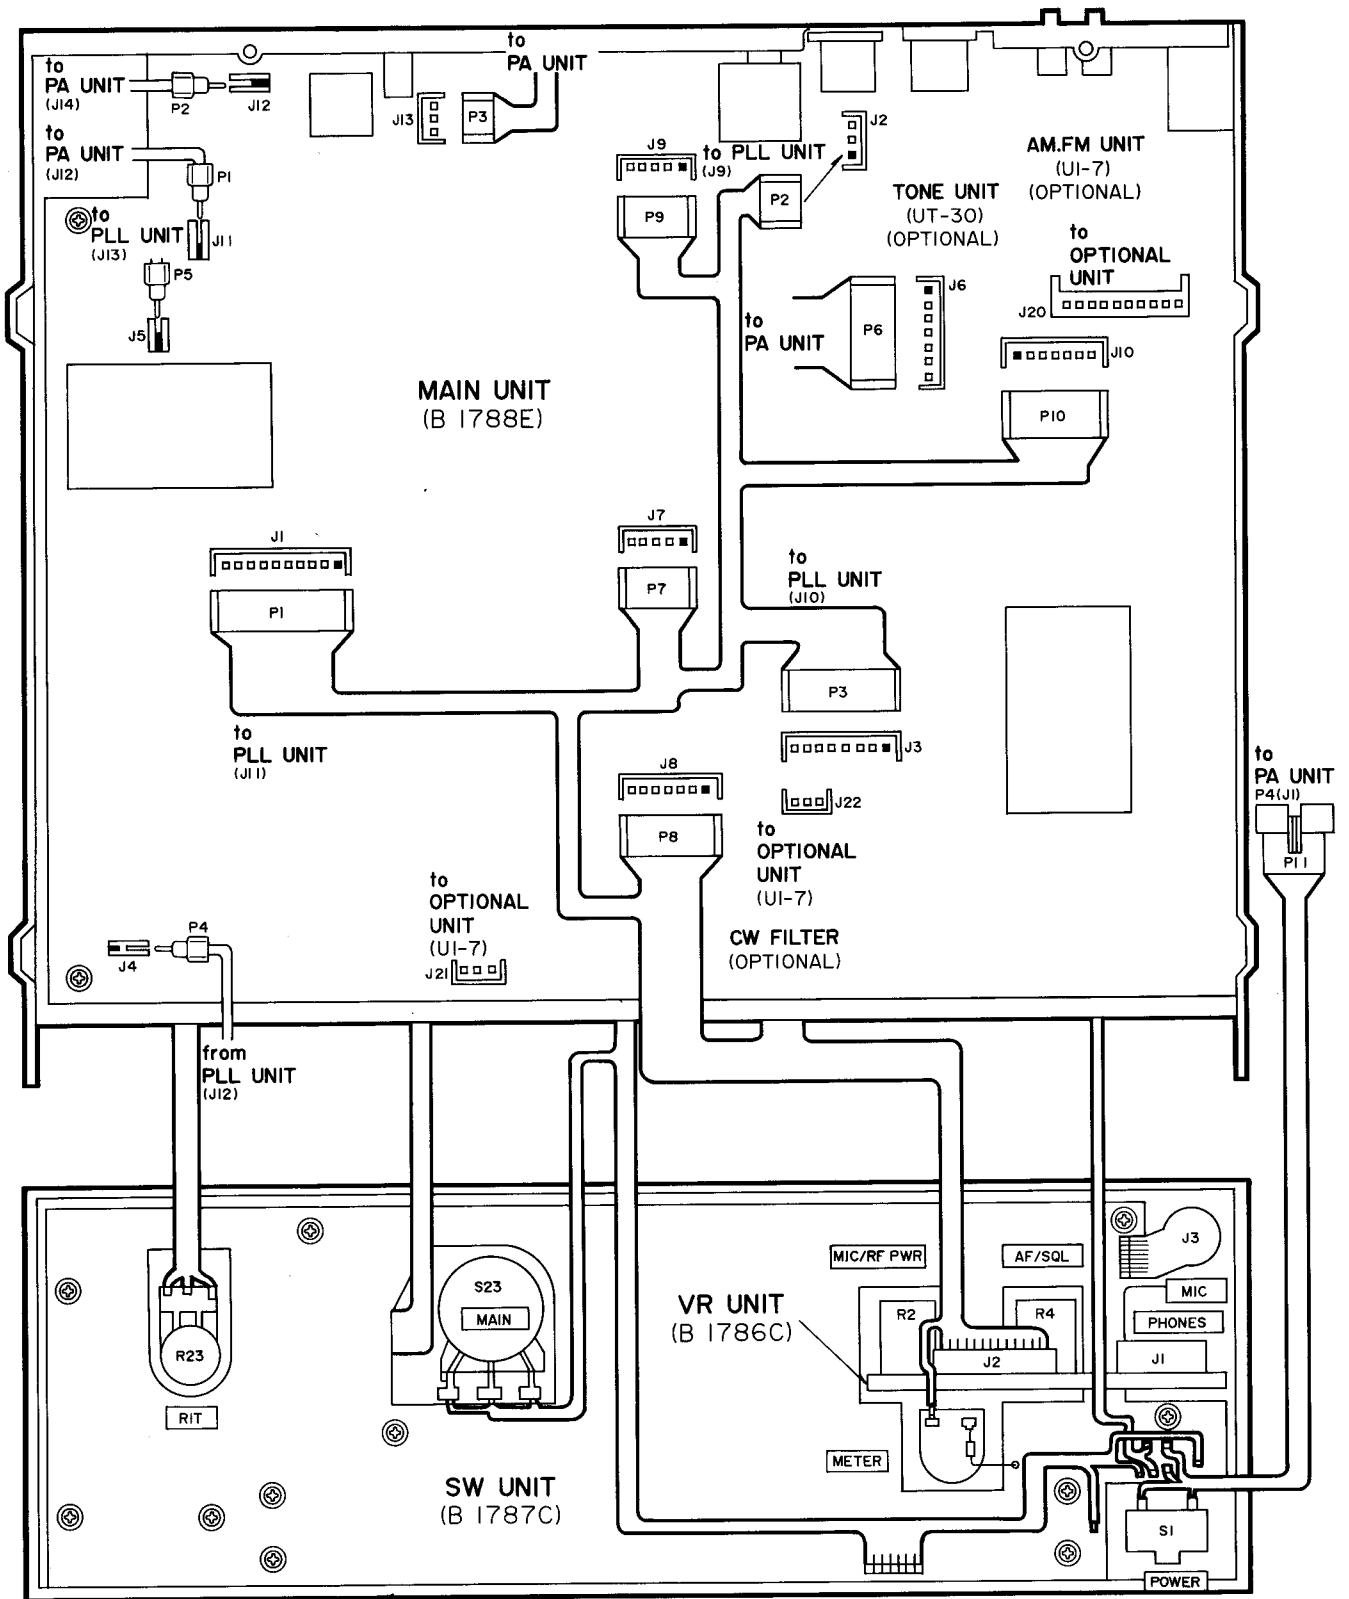

# 5-5 PA AND FILTER UNITS CONNECTOR ASSEMBLY

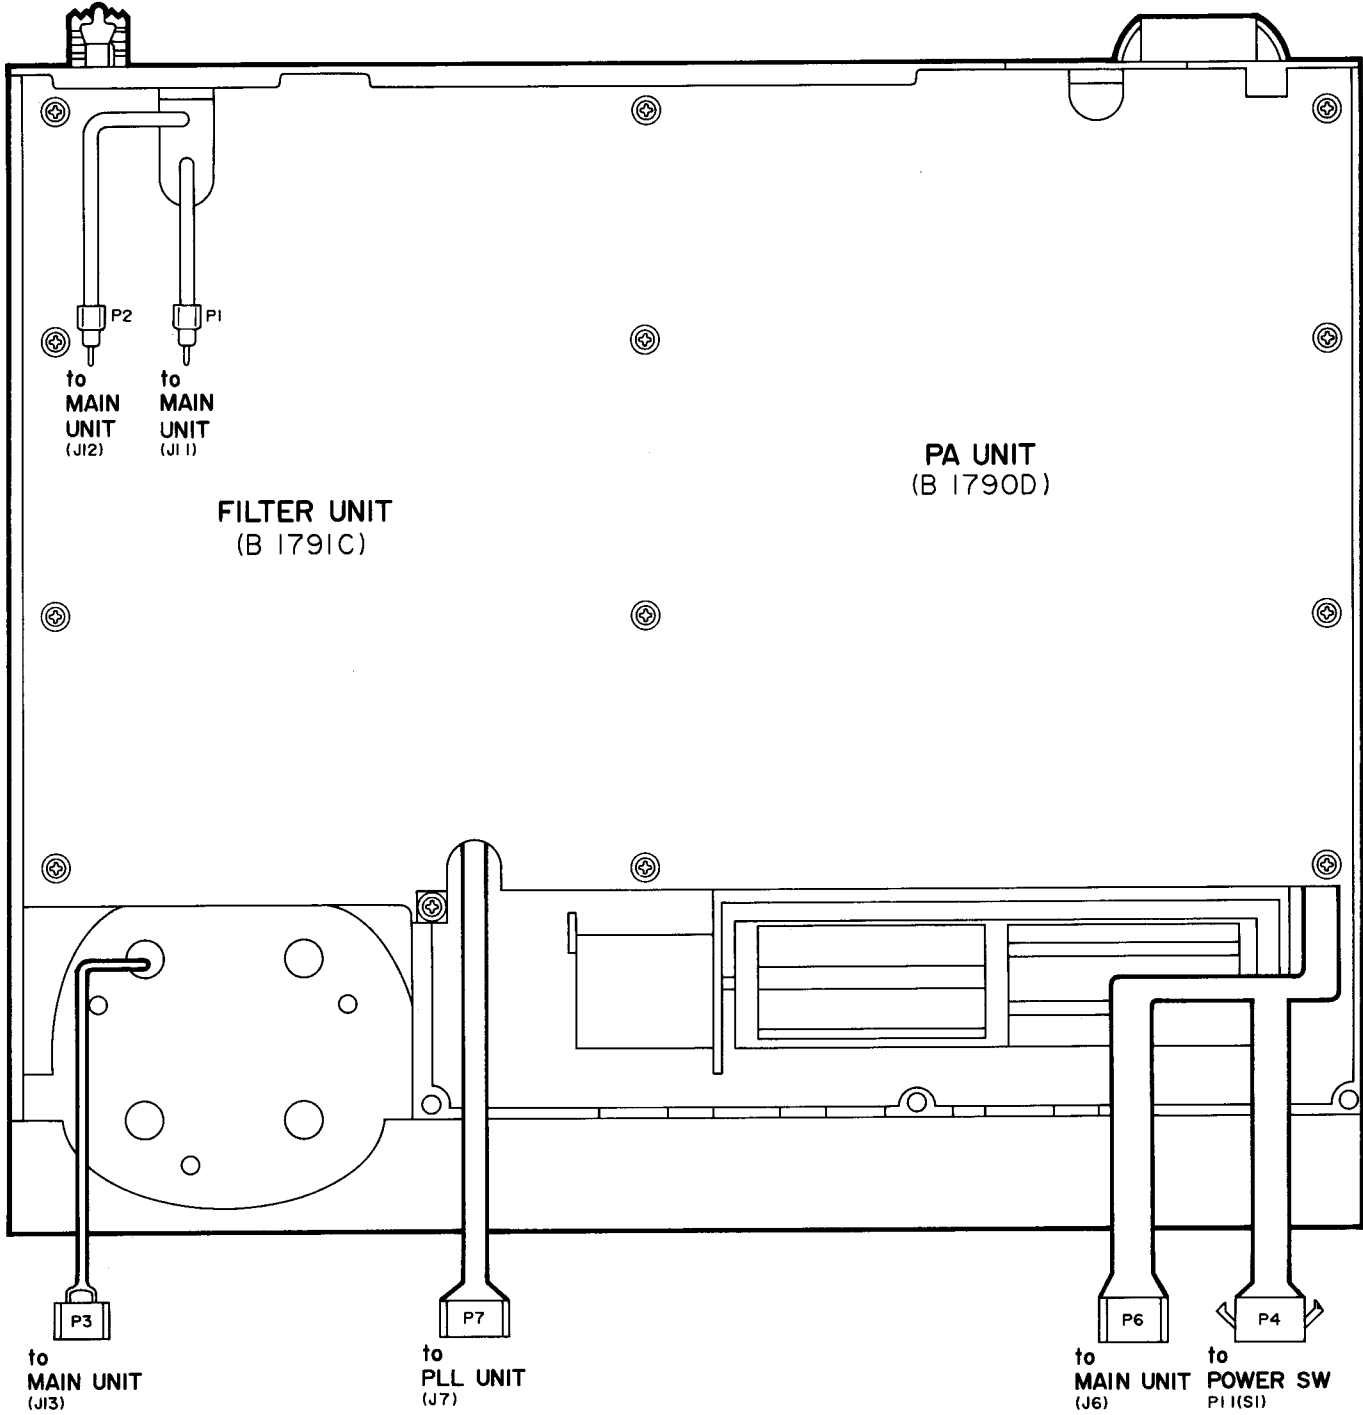


# SECTION 6 ADJUSTMENT PROCEDURES

## 6-1 PREPARATION BEFORE SERVICING

### ■ REQUIRED TEST EQUIPMENT

| EQUIPMENT                        | GRADE AND RANGE  | EQUIPMENT          | GRADE AND RANGE   |
|----------------------------------|--|--------------------|---|
| AC power supply                  | Output voltage : 13.8 V DC<br>Current capacity : 30 A or more  | DC voltmeter       | Input impedance : 50 k $\Omega$ /DC or better                                     |
| RF power meter (terminated type) | Measuring range : 10~200 W<br>Frequency range : 1.8~30 MHz<br>Impedance : 50 $\Omega$<br>SWR : Less than 1.2 : 1 | AC milli-voltmeter | Measuring range : 10 mV~10 V  |
| Frequency counter                | Frequency range : 0.1~100 MHz<br>Frequency accuracy : $\pm 1$ ppm or better<br>Sensitivity : 100 mV or better    | External speaker   | Impedance : 8 $\Omega$  |
| RF voltmeter                     | Frequency range : 0.1~100 MHz<br>Measuring range : 0.01~10 V   | Ammeter            | Measurement capability: 1 A and 30 A  |
| Oscilloscope                     | Frequency range : DC~20 MHz<br>Measuring range : 0.01~10 V   | Audio generator    | Frequency range : 300~3000 Hz<br>Output level : 1~500 mV                          |
| Standard signal generator (SSG)  | Frequency range : 0.1~30 MHz<br>Output level : -127~-17 dBm<br>(0.1 $\mu$ V~32 mV)                               | Attenuator         | Power attenuation : 40 or 50 dB<br>Capacity : 150 W or more                       |
|                                  |  | Spectrum analyzer  | Frequency minimum : At least 90 MHz<br>Spectrum bandwidth : $\pm 100$ kHz or more |

### ■ CONNECTION

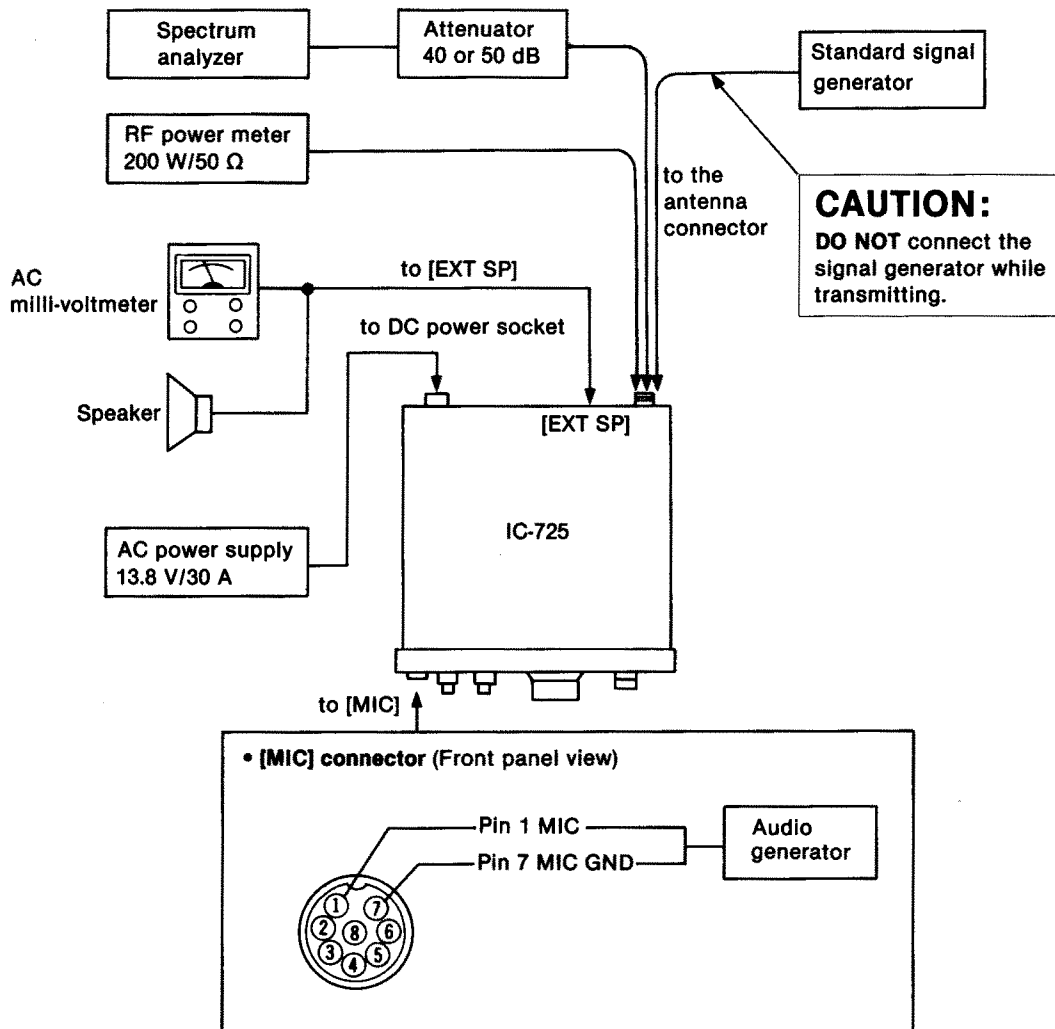




## 6-2 PLL ADJUSTMENT

| ADJUSTMENT          | ADJUSTMENT CONDITIONS | MEASUREMENT   |           | VALUE  | ADJUSTMENT POINT                    |             |                                  |          |
|---------------------|-----------------------|---|-----------|--|-------------------------------------|-------------|----------------------------------|----------|
|                     |                       | UNIT  | LOCATION  |  | UNIT                                | ADJUST      |                                  |          |
| REFERENCE FREQUENCY | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>Receiving</li> </ul>  | PLL       | Terminate P4 to ground with a 50 $\Omega$ resistor.<br>Connect the RF voltmeter to P4. | Pre-set to center.                  | PLL         | C134                             |          |
|                     | 2                     |   |           |  |                                     |             | Maximum level (More than +3 dBm) | L38, L39 |
|                     | 3                     |   |           |  |                                     |             | 61.4400 MHz                      | L35      |
|                     | 4                     | After adjustment, remove the resistor from P4 and re-plug P4.   |           |  |                                     |             |                                  |          |
| DDS CLOCK           | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>Receiving</li> </ul>  | DDS       | Connect the frequency counter to IC4 pin 11 or IC5 pin 11.                             | 5.24288 MHz                         | DDS         | C1                               |          |
| DDS LOOP            | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.12650 MHz</li> <li>Mode : AM</li> <li>Receiving</li> </ul>   | PLL       | Connect the oscilloscope to R133 (rear panel side).                                    | 1.0 V DC                            | PLL         | L30                              |          |
|                     | 2                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.12649 MHz</li> </ul>   |           |  | Approx. 2.0 V DC                    |             | Verify                           |          |
| 1ST LO LOCK VOLTAGE | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 7.99999 MHz</li> <li>Mode : USB</li> <li>Receiving</li> </ul>   | PLL       | Connect the oscilloscope to R77. (shielding case side)                                 | 6.5 V DC                            | PLL         | C35                              |          |
|                     | 2                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.99999 MHz</li> </ul>   |           |  | 6.5 V DC                            |             | C46                              |          |
|                     | 3                     | <ul style="list-style-type: none"> <li>Displayed frequency: 21.99999 MHz</li> </ul>   |           |  | 6.5 V DC                            |             | C59                              |          |
|                     | 4                     | <ul style="list-style-type: none"> <li>Displayed frequency: 33.00000 MHz</li> </ul>   |           |  | 7.5 V DC                            |             | C70                              |          |
|                     | 5                     | <ul style="list-style-type: none"> <li>Displayed frequencies: 0.50000 MHz, 8.00000 MHz, 15.00000 MHz and 22.00000 MHz</li> </ul>  |           |  | More than 2.0 V DC                  |             | Verify                           |          |
| 1ST LO OUTPUT LEVEL | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>Receiving</li> </ul>  | PLL       | Terminate P5 to ground with a 50 $\Omega$ resistor.<br>Connect the RF voltmeter to P5. | More than 0 dBm                     |             | Verify                           |          |
|                     | 2                     | After adjustment, remove the resistor from P5 and re-plug P5.   |           |  |                                     |             |                                  |          |
| RIT                 | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>Set the signal generator;<br/>Level : 50 <math>\mu</math>V (-73 dBm)<br/>Modulation: OFF</li> <li>[RIT] switch : ON and OFF</li> <li>Receiving</li> </ul> | Top cover | Speaker  | Pre-set to center.                  | Front panel | [RIT] control                    |          |
|                     | 2                     |   |           |  | Same tone pitch on both conditions. |             | PLL                              | R70      |


PLL AND DDS UNITS

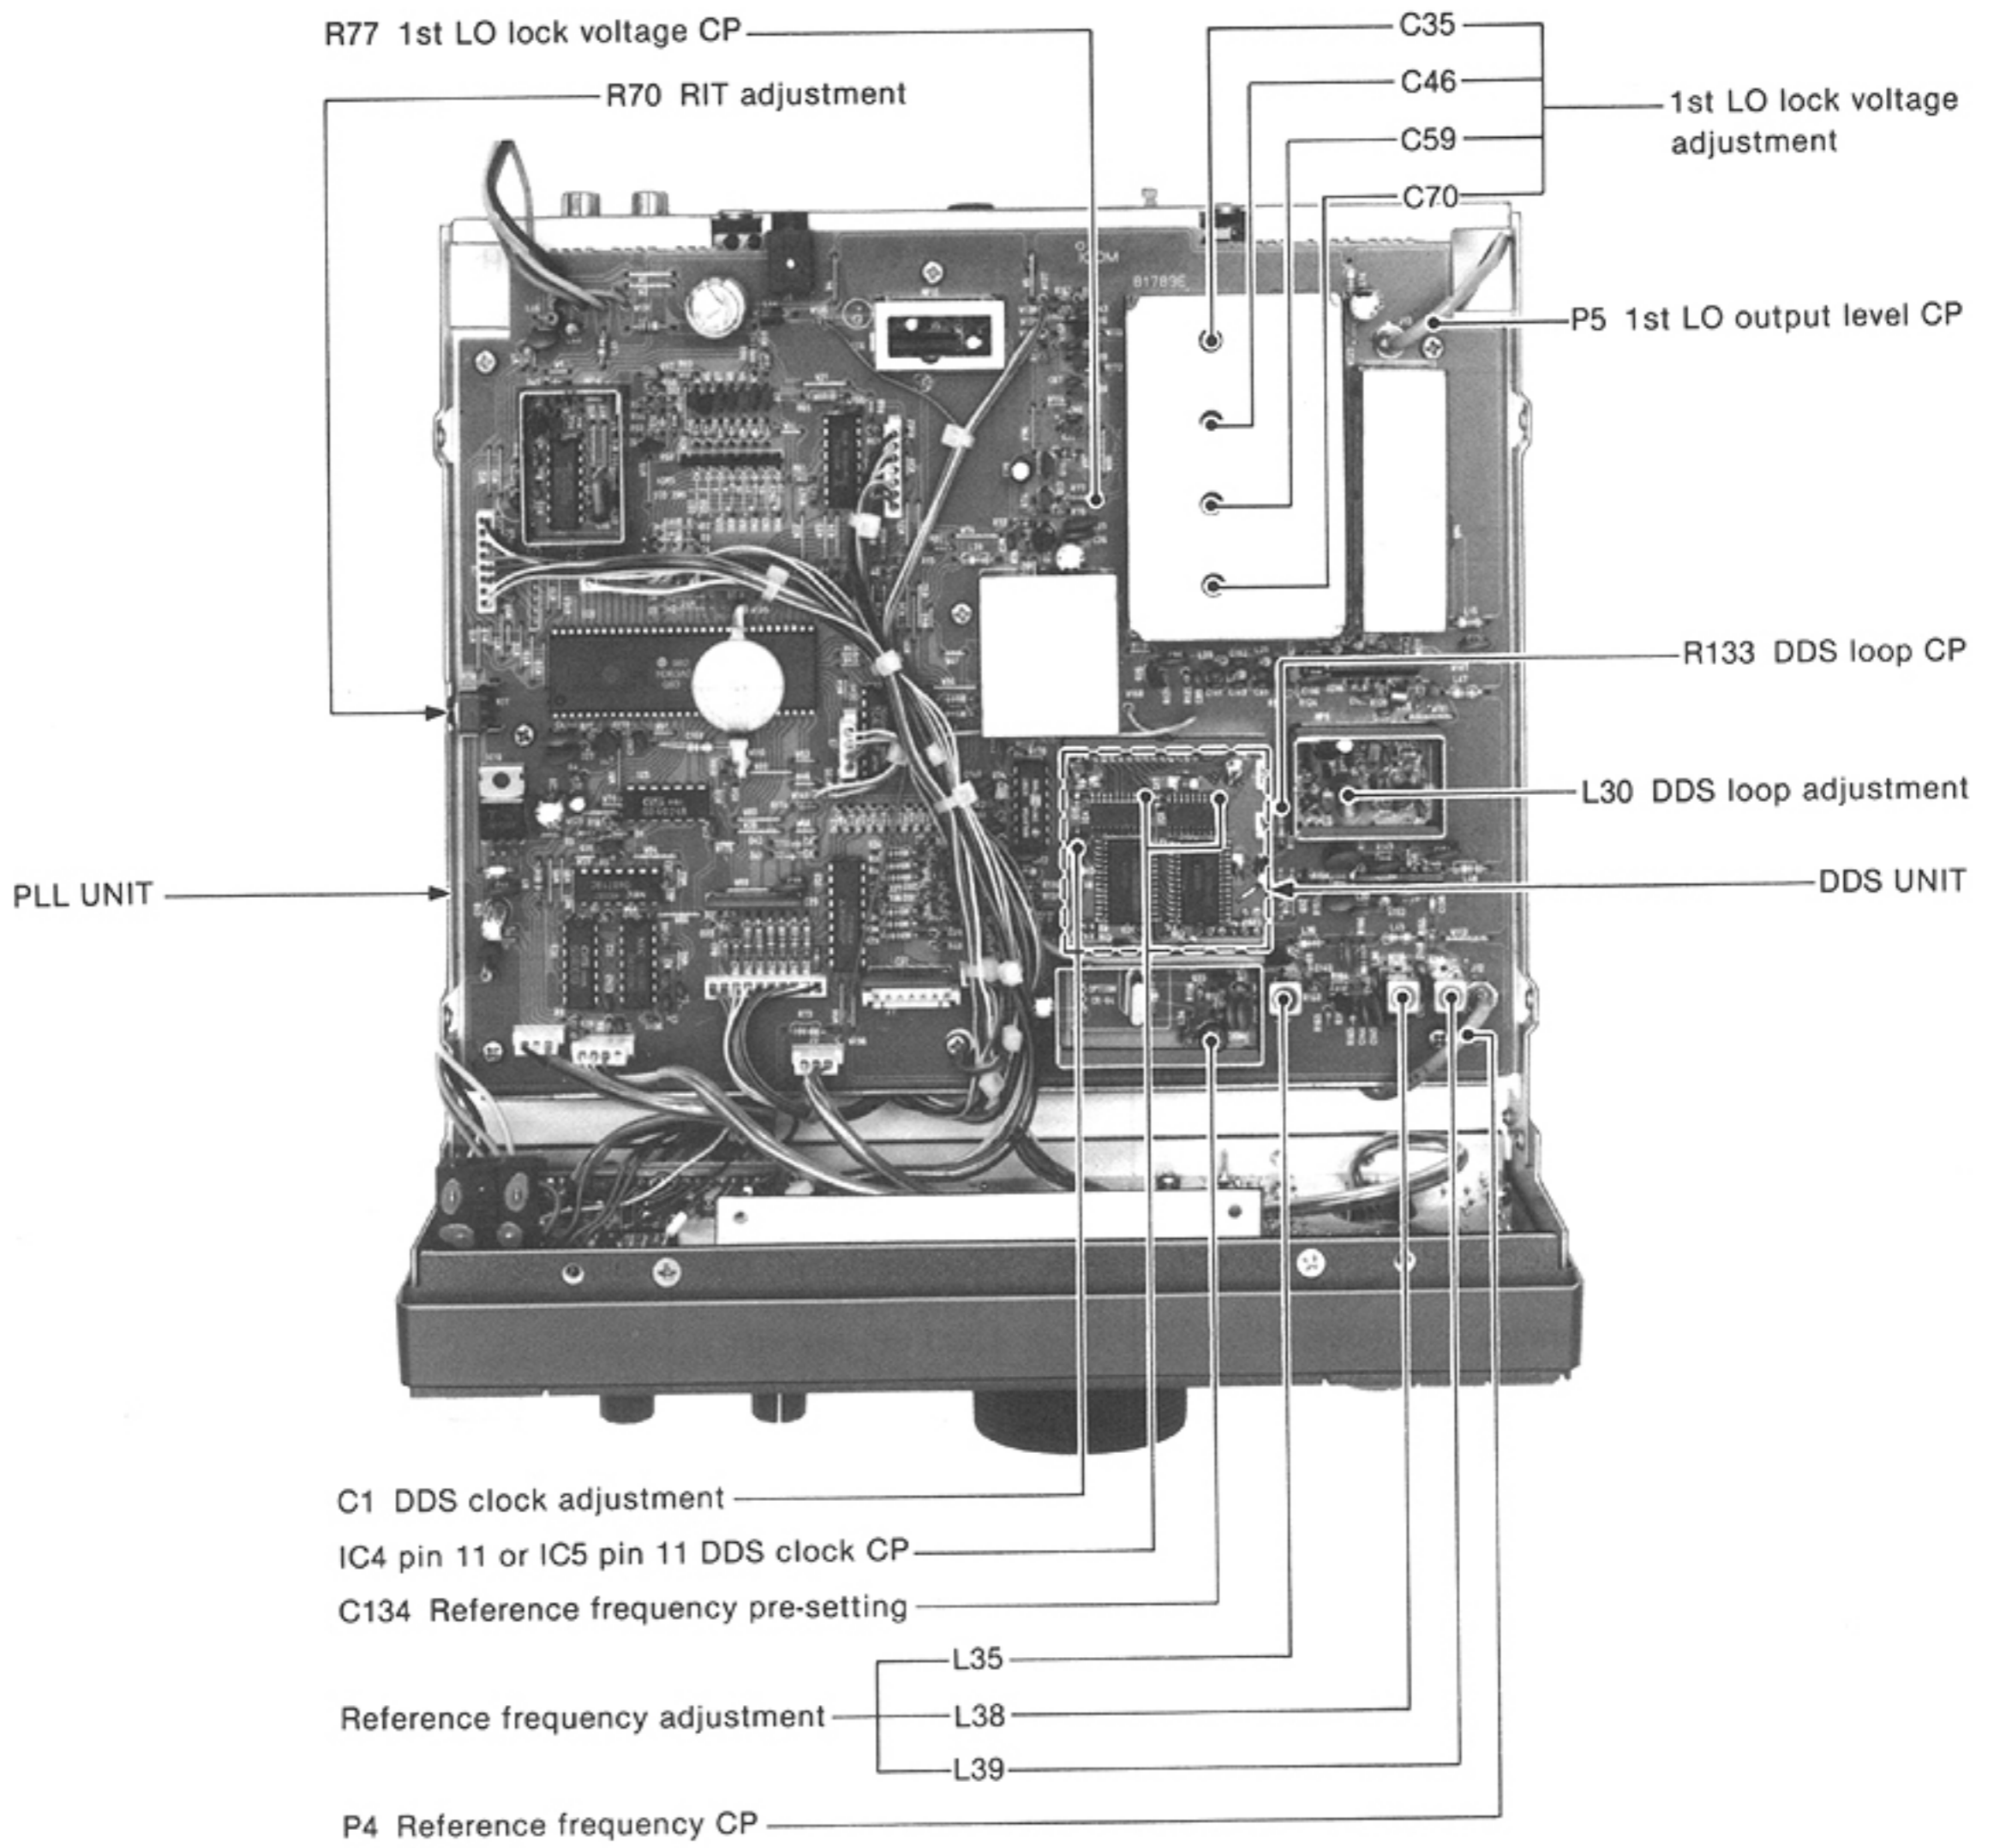


## 6-3 RECEIVER ADJUSTMENT

| ADJUSTMENT    | ADJUSTMENT CONDITIONS | MEASUREMENT  |             | VALUE   | ADJUSTMENT POINT           |             |  |
|---------------|-----------------------|--|-------------|---|----------------------------|-------------|--|
|               |                       | UNIT   | LOCATION    |   | UNIT                       | ADJUST      |  |
| BFO FREQUENCY | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>Receiving</li> </ul>   | MAIN        | Connect the frequency counter to R266.                                      | 9.01300 MHz                | MAIN        | C294   |
|               | 2                     | <ul style="list-style-type: none"> <li>Mode : CW</li> <li>Transmitting</li> </ul>  |             |   | 9.01060 MHz                |             | L83  |
|               | 3                     | <ul style="list-style-type: none"> <li>Mode : LSB</li> <li>Receiving</li> </ul>  |             |   | 9.01000 MHz                |             | L82  |
|               | 4                     | <ul style="list-style-type: none"> <li>Mode : CW</li> </ul>  |             |   | 9.00980 MHz<br>(± 150 Hz)  |             | Verify   |
|               | 5                     | <ul style="list-style-type: none"> <li>Mode : AM</li> </ul>  |             |   | No output                  |             |  |
| SENSITIVITY   | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>[RIT] switch : OFF</li> <li>[AGC] switch : IN (Fast)</li> <li>[ATT] switch : OFF</li> <li>[NB] switch : OFF</li> <li>[PRE] switch : ON</li> <li>[SQL] control : Max. CCW</li> <li>Set the signal generator;<br/>Level : 0.16 <math>\mu</math>V (−123 dBm)</li> <li>Modulation: OFF</li> <li>Receiving</li> </ul> | Rear panel  | Connect the AC millivoltmeter to the [EXT SP] jack with an 8 $\Omega$ load. | Pre-set to max. CW.        | MAIN        | R138   |
|               |                       |  |             |   | Maximum audio output level |             | L33, L34, L35, L36, L16, L17, L21, L22, L23, L79, L78, L77 |
| TOTAL GAIN    | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>[PRE] switch : OFF</li> <li>Set the signal generator;<br/>Level : 1.0 mV (−47 dBm)</li> <li>Modulation: OFF</li> <li>Receiving</li> </ul>  | Rear panel  | Connect the AC millivoltmeter to the [EXT SP] jack with an 8 $\Omega$ load. | 1.0 V (0 dB)               | Front panel | [AF] control   |
|               | 2                     | <ul style="list-style-type: none"> <li>Set the signal generator;<br/>Level : OFF</li> </ul>  |             |   | 30 mV (−30 dB)             |             | MAIN   |
| S-METER       | 1                     | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>[PRE] switch : OFF</li> <li>Set the signal generator;<br/>Level : 50 <math>\mu</math>V (−73 dBm)</li> <li>Modulation: OFF</li> <li>Receiving</li> </ul>  | Front panel | Meter   | S9                         | MAIN        | R116   |
|               | 2                     | <ul style="list-style-type: none"> <li>Set the signal generator;<br/>Level : 50 mV (−13 dBm)</li> </ul>  |             |   | S9+60 dB                   |             | R110   |
|               | 3                     | Repeat above adjustments 1 and 2 a couple of times.  |             |   |                            |             |  |



## RECEIVER ADJUSTMENT (CONTINUED)
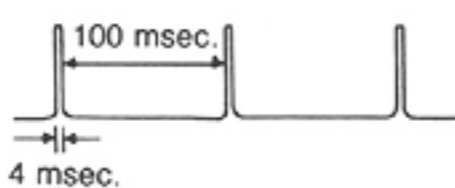
| ADJUSTMENT    | ADJUSTMENT CONDITIONS  | MEASUREMENT |   | VALUE  | ADJUSTMENT POINT |          |
|---------------|--|-------------|---|--|------------------|----------|
|               |  | UNIT        | LOCATION  |  | UNIT             | ADJUST   |
| NOISE BLANKER | 1 <ul style="list-style-type: none"> <li>• Displayed frequency: 14.10000 MHz</li> <li>• Mode : USB</li> <li>• [NB] switch : ON</li> <li>• Apply an RF signal including the following pulse noise to the antenna connector.<br/>RF signal level : 3.2 <math>\mu</math>V (-97 dBm)</li> <li>• Receiving</li> </ul>  | MAIN        | Connect the oscilloscope to the cathode of D13. | Adjust for maximum waveform on the oscilloscope. | MAIN             | L25, L26 |


## MAIN UNIT

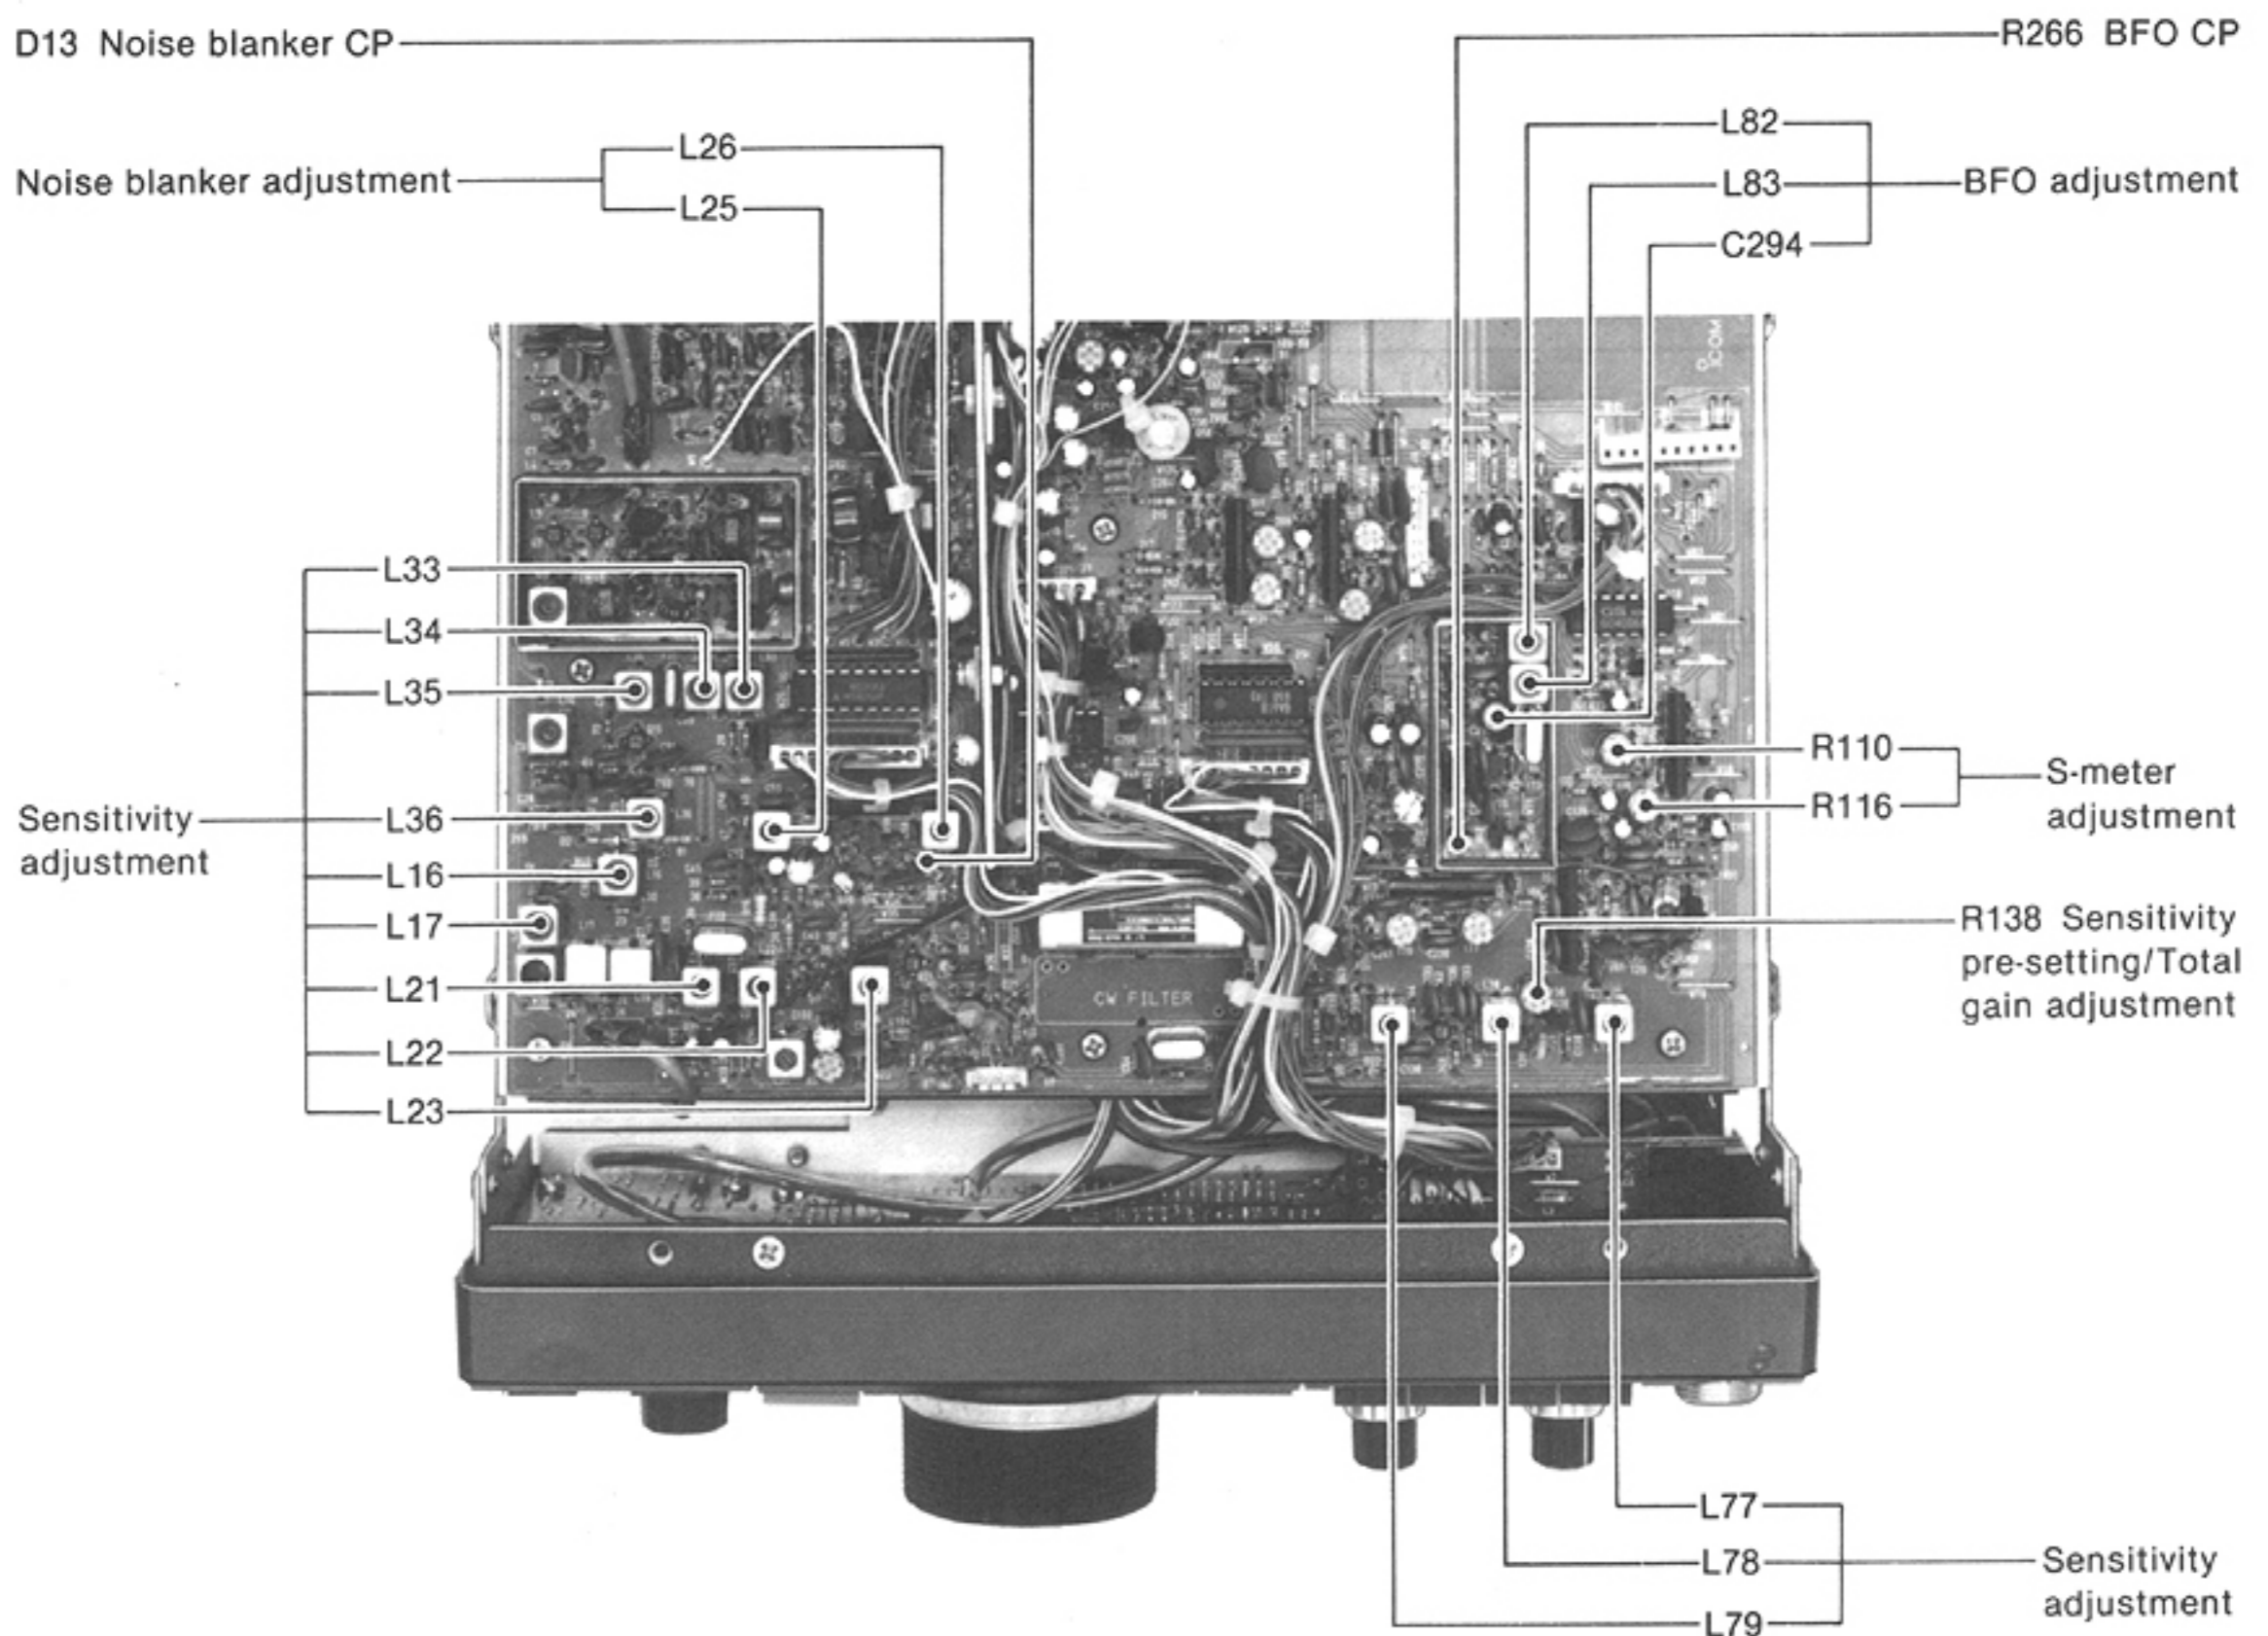

## 6-4 TRANSMITTER ADJUSTMENT
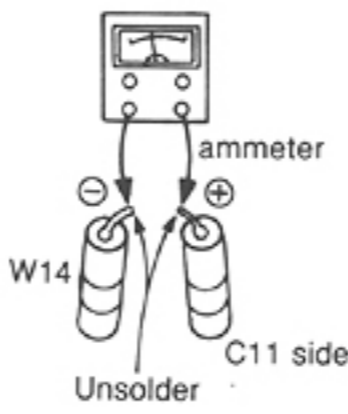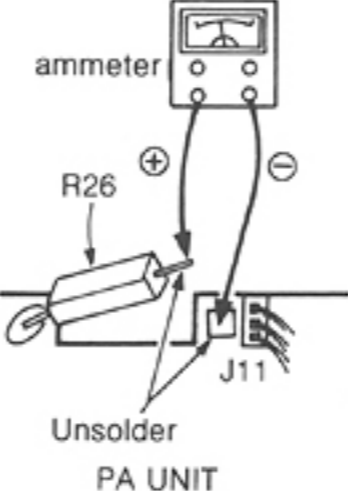
| ADJUSTMENT                                | ADJUSTMENT CONDITIONS   | MEASUREMENT |   | VALUE  | ADJUSTMENT POINT |        |
|---|---|-------------|---|--------|------------------|--------|
|   |   | UNIT        | LOCATION  |        | UNIT             | ADJUST |
| IDLING CURRENT<br>Ⓐ For drive transistors | 1 <ul style="list-style-type: none"> <li>• Displayed frequency: 14.10000 MHz</li> <li>• Mode : CW</li> <li>• [TRANSMIT] switch: IN</li> <li>• [KEY] jack : No connection</li> </ul> | PA          | Unsolder W14 and connect the ammeter to the unsoldering points.<br>   | 50 mA  | PA               | R8     |
| Ⓑ For final transistors                   | 2   | PA          | Unsolder R26 and connect the ammeter to the unsoldering points.<br> | 300 mA | PA               | R19    |
| After adjustment, re-solder W14 and R26.  |   |             |   |        |                  |        |

### PA AND FILTER UNITS

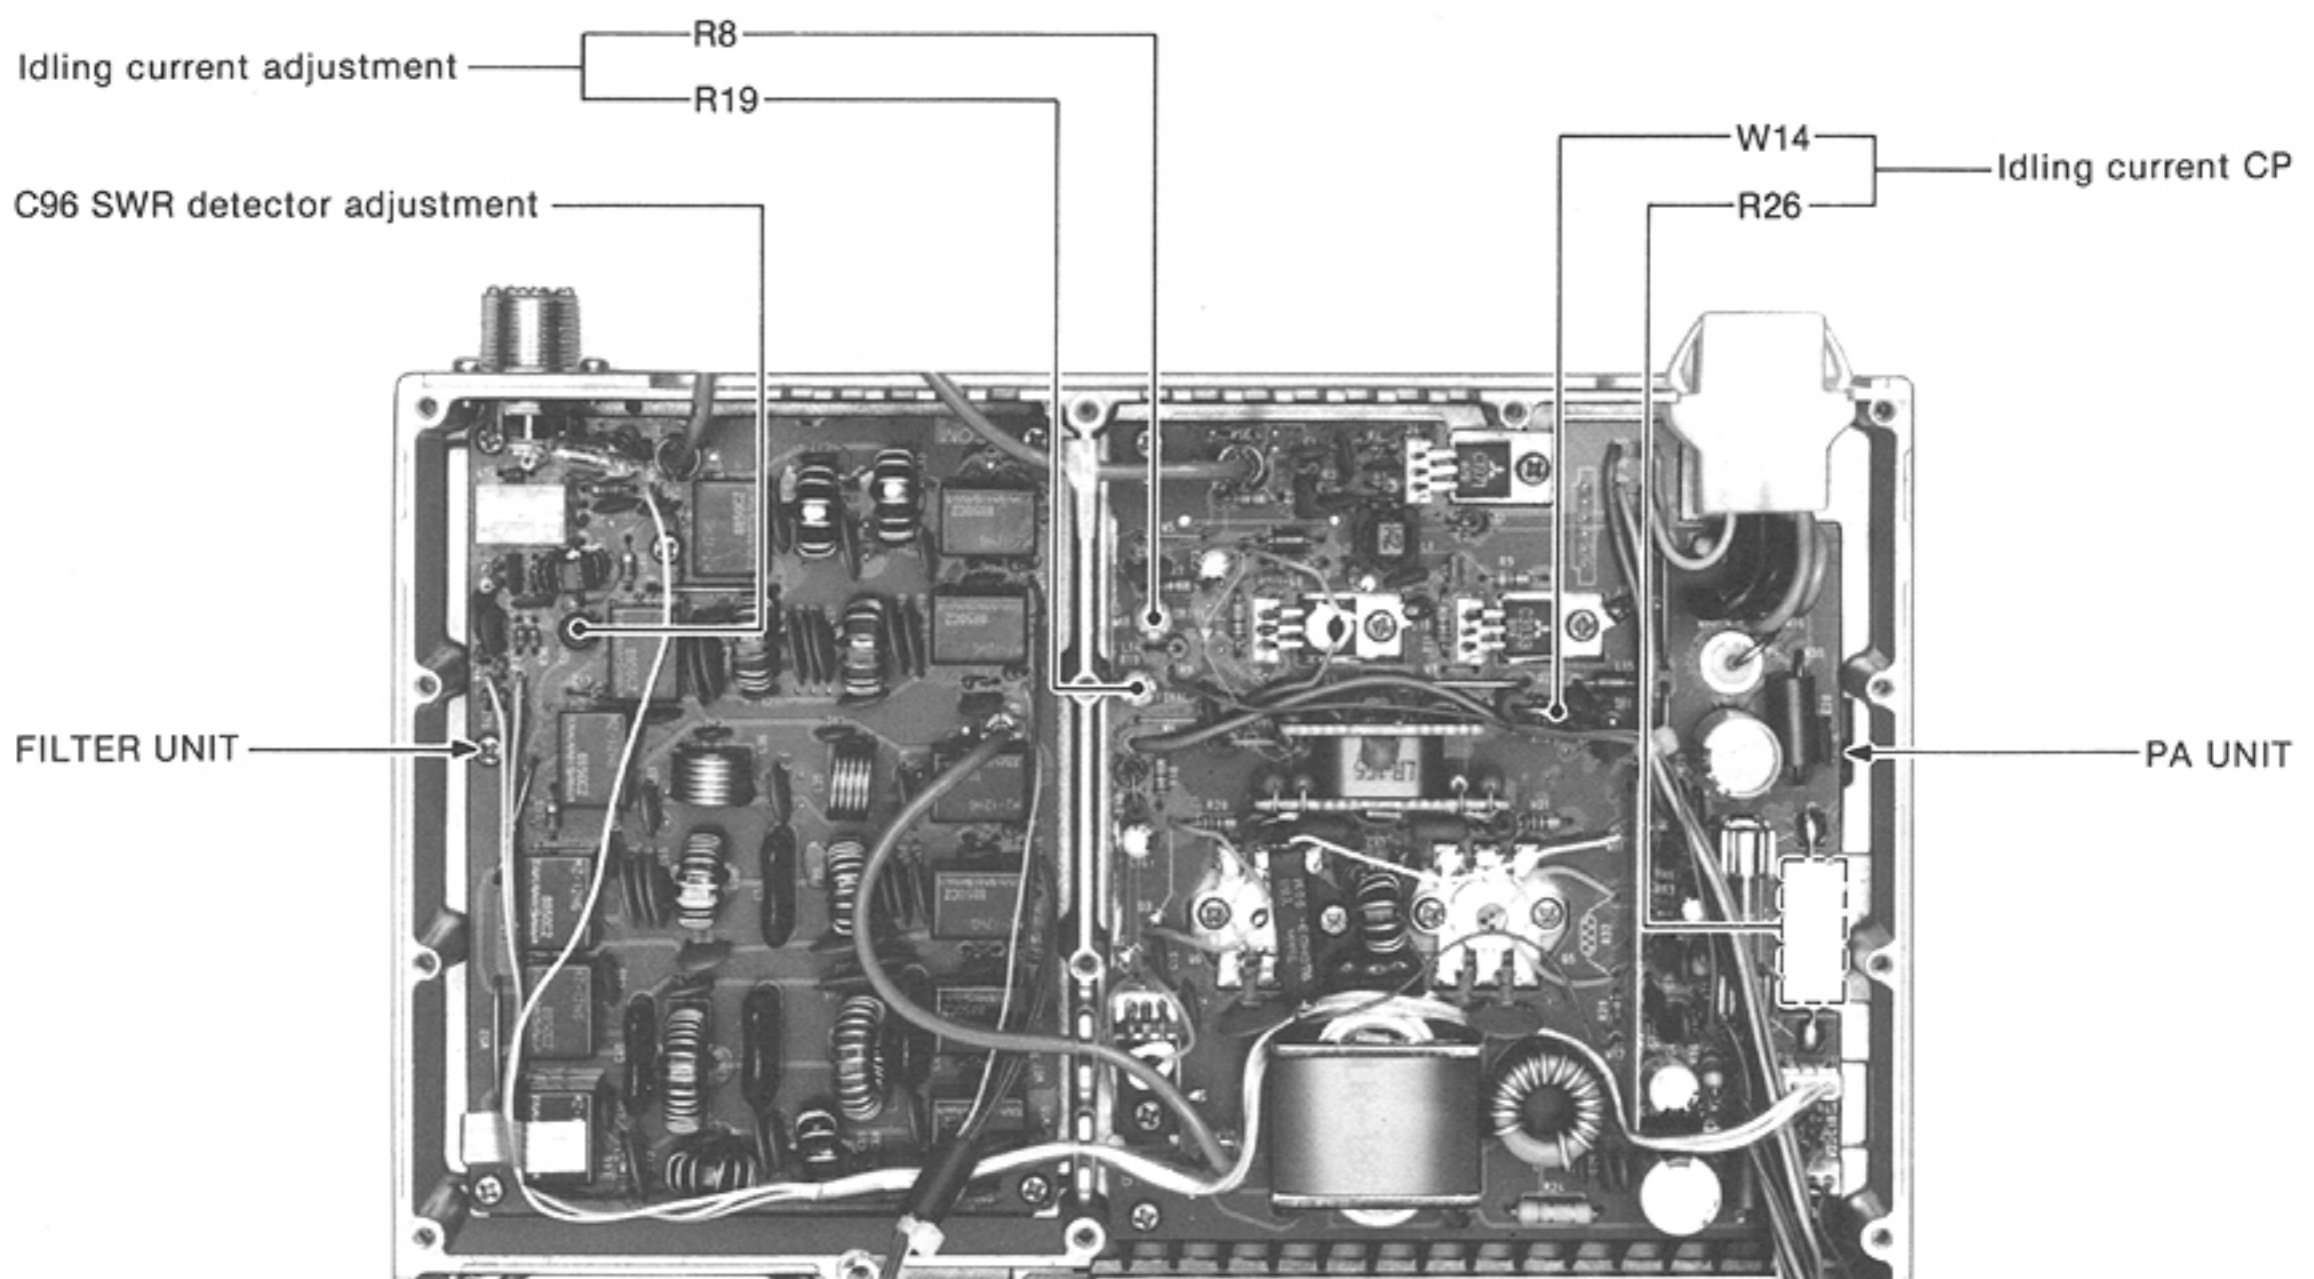


## TRANSMITTER ADJUSTMENT (CONTINUED)

| ADJUSTMENT    | ADJUSTMENT CONDITIONS  | MEASUREMENT  |             | VALUE   | ADJUSTMENT POINT     |             |                        |
|---------------|--|--|-------------|---|----------------------|-------------|------------------------|
|               |  | UNIT   | LOCATION    |   | UNIT                 | ADJUST      |                        |
| SWR DETECTOR  | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>[RF PWR] control : Max. CW</li> </ul>  | Rear panel  | Connect the RF power meter to the antenna connector.        | 100 W                | Front panel | [MIC] control          |
|               | 2  | <ul style="list-style-type: none"> <li>Connect a jumper wire between R87 front side and ground.</li> <li>Apply an RF signal to the [MIC] connector.</li> <li>Level : 10 mV/1.5 kHz</li> <li>Transmitting</li> </ul>  | MAIN        | Connect the DC voltmeter to J6 pin 2.                       | Minimum              | FILTER      | C96 (See p. 6-6)       |
|               | 3  | After adjustment, remove the jumper wire from R87.   |             |   |                      |             |                        |
| TRANSMIT GAIN | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : USB</li> <li>[RF PWR] control : Max. CW</li> <li>Apply an AF signal to the [MIC] connector.</li> <li>Level : 1 mV/1.5 kHz</li> <li>Transmitting</li> </ul>                    | Rear panel  | Connect the RF power meter to the antenna connector.        | Pre-set to max. CCW. | MAIN        | R85                    |
|               |  |  |             |   | 50 W                 | Front panel | [MIC] control          |
|               |  |  |             |   | Maximum level        | MAIN        | L37, L17, L16, L14, L7 |
|               | 2  | <ul style="list-style-type: none"> <li>[MIC] control : Max. CW</li> </ul>  |             | 50 W  |                      | R85         |                        |
|               | NOTE: Adjust the [MIC] control to keep the output power at 50 W for each adjustment. |  |             |   |                      |             |                        |
| OUTPUT POWER  | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 1.91000 MHz</li> <li>Mode : CW</li> <li>[RF PWR] control : Max. CW</li> </ul>  | Rear panel  | Connect the RF power meter to the antenna connector.        | Pre-set to max. CCW. | MAIN        | R194, R241             |
|               | 2  | <ul style="list-style-type: none"> <li>Connect a key to the [KEY] jack and keep the key down.</li> </ul>   |             |   | 100 W                |             | R210                   |
|               | 3  | <ul style="list-style-type: none"> <li>[RF PWR] control : Max. CCW</li> </ul>  |             |   | 10 W                 |             | R208                   |
|               | 4  | Repeat steps 2 and 3 a couple of times.  |             |   |                      |             |                        |
| Ic APC        | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : CW</li> <li>[RF PWR] control : Max. CW</li> <li>Connect a jumper wire between J6 pin 3 and ground.</li> <li>Connect a key to the [KEY] jack and keep the key down.</li> </ul> | Rear panel  | Connect the ammeter between the AC power supply and IC-725. | 22 A                 | MAIN        | R194                   |
|               | 2  | After adjustment, remove the jumper wire from J6 pin 3.  |             |   |                      |             |                        |
| Po METER      | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : CW</li> <li>[RF PWR] control : Max. CW</li> <li>Connect a key to the [KEY] jack and keep the key down.</li> </ul>   | Front panel | Meter   | 100 % (full scale)   | MAIN        | R186                   |
| CW DELAY TIME | 1  | <ul style="list-style-type: none"> <li>Displayed frequency: 14.10000 MHz</li> <li>Mode : CW</li> <li>[BK IN] switch : ON</li> <li>[DELAY] control : Max. CCW</li> <li>Connect an external electronic keyer to the [KEY] jack and close the key.</li> </ul>             | MAIN        | Connect the oscilloscope to J11 and the electronic keyer.   | Adjust as follows:   | MAIN        | R241                   |
|               |  |  |             |   |                      |             |                        |

## TRANSMITTER ADJUSTMENT (CONTINUED)

| ADJUSTMENT          | ADJUSTMENT CONDITIONS   | MEASUREMENT |  | VALUE                                    | ADJUSTMENT POINT |                                 |
|---------------------|---|-------------|--|--|------------------|---------------------------------|
|                     |   | UNIT        | LOCATION   |  | UNIT             | ADJUST                          |
| CARRIER SUPPRESSION | 1 <ul style="list-style-type: none"> <li>• Displayed frequency: 1.91000 MHz</li> <li>• Mode : USB and LSB</li> <li>• [MIC] control : Max. CCW</li> <li>• Apply no signal to the [MIC] connector.</li> <li>• Transmitting</li> </ul> | Rear panel  | Connect the spectrum analyzer to the antenna connector via the attenuator. | Minimum carrier level (Less than -50 dB) | MAIN             | R177, R179 (Alternately adjust) |


## MAIN UNIT

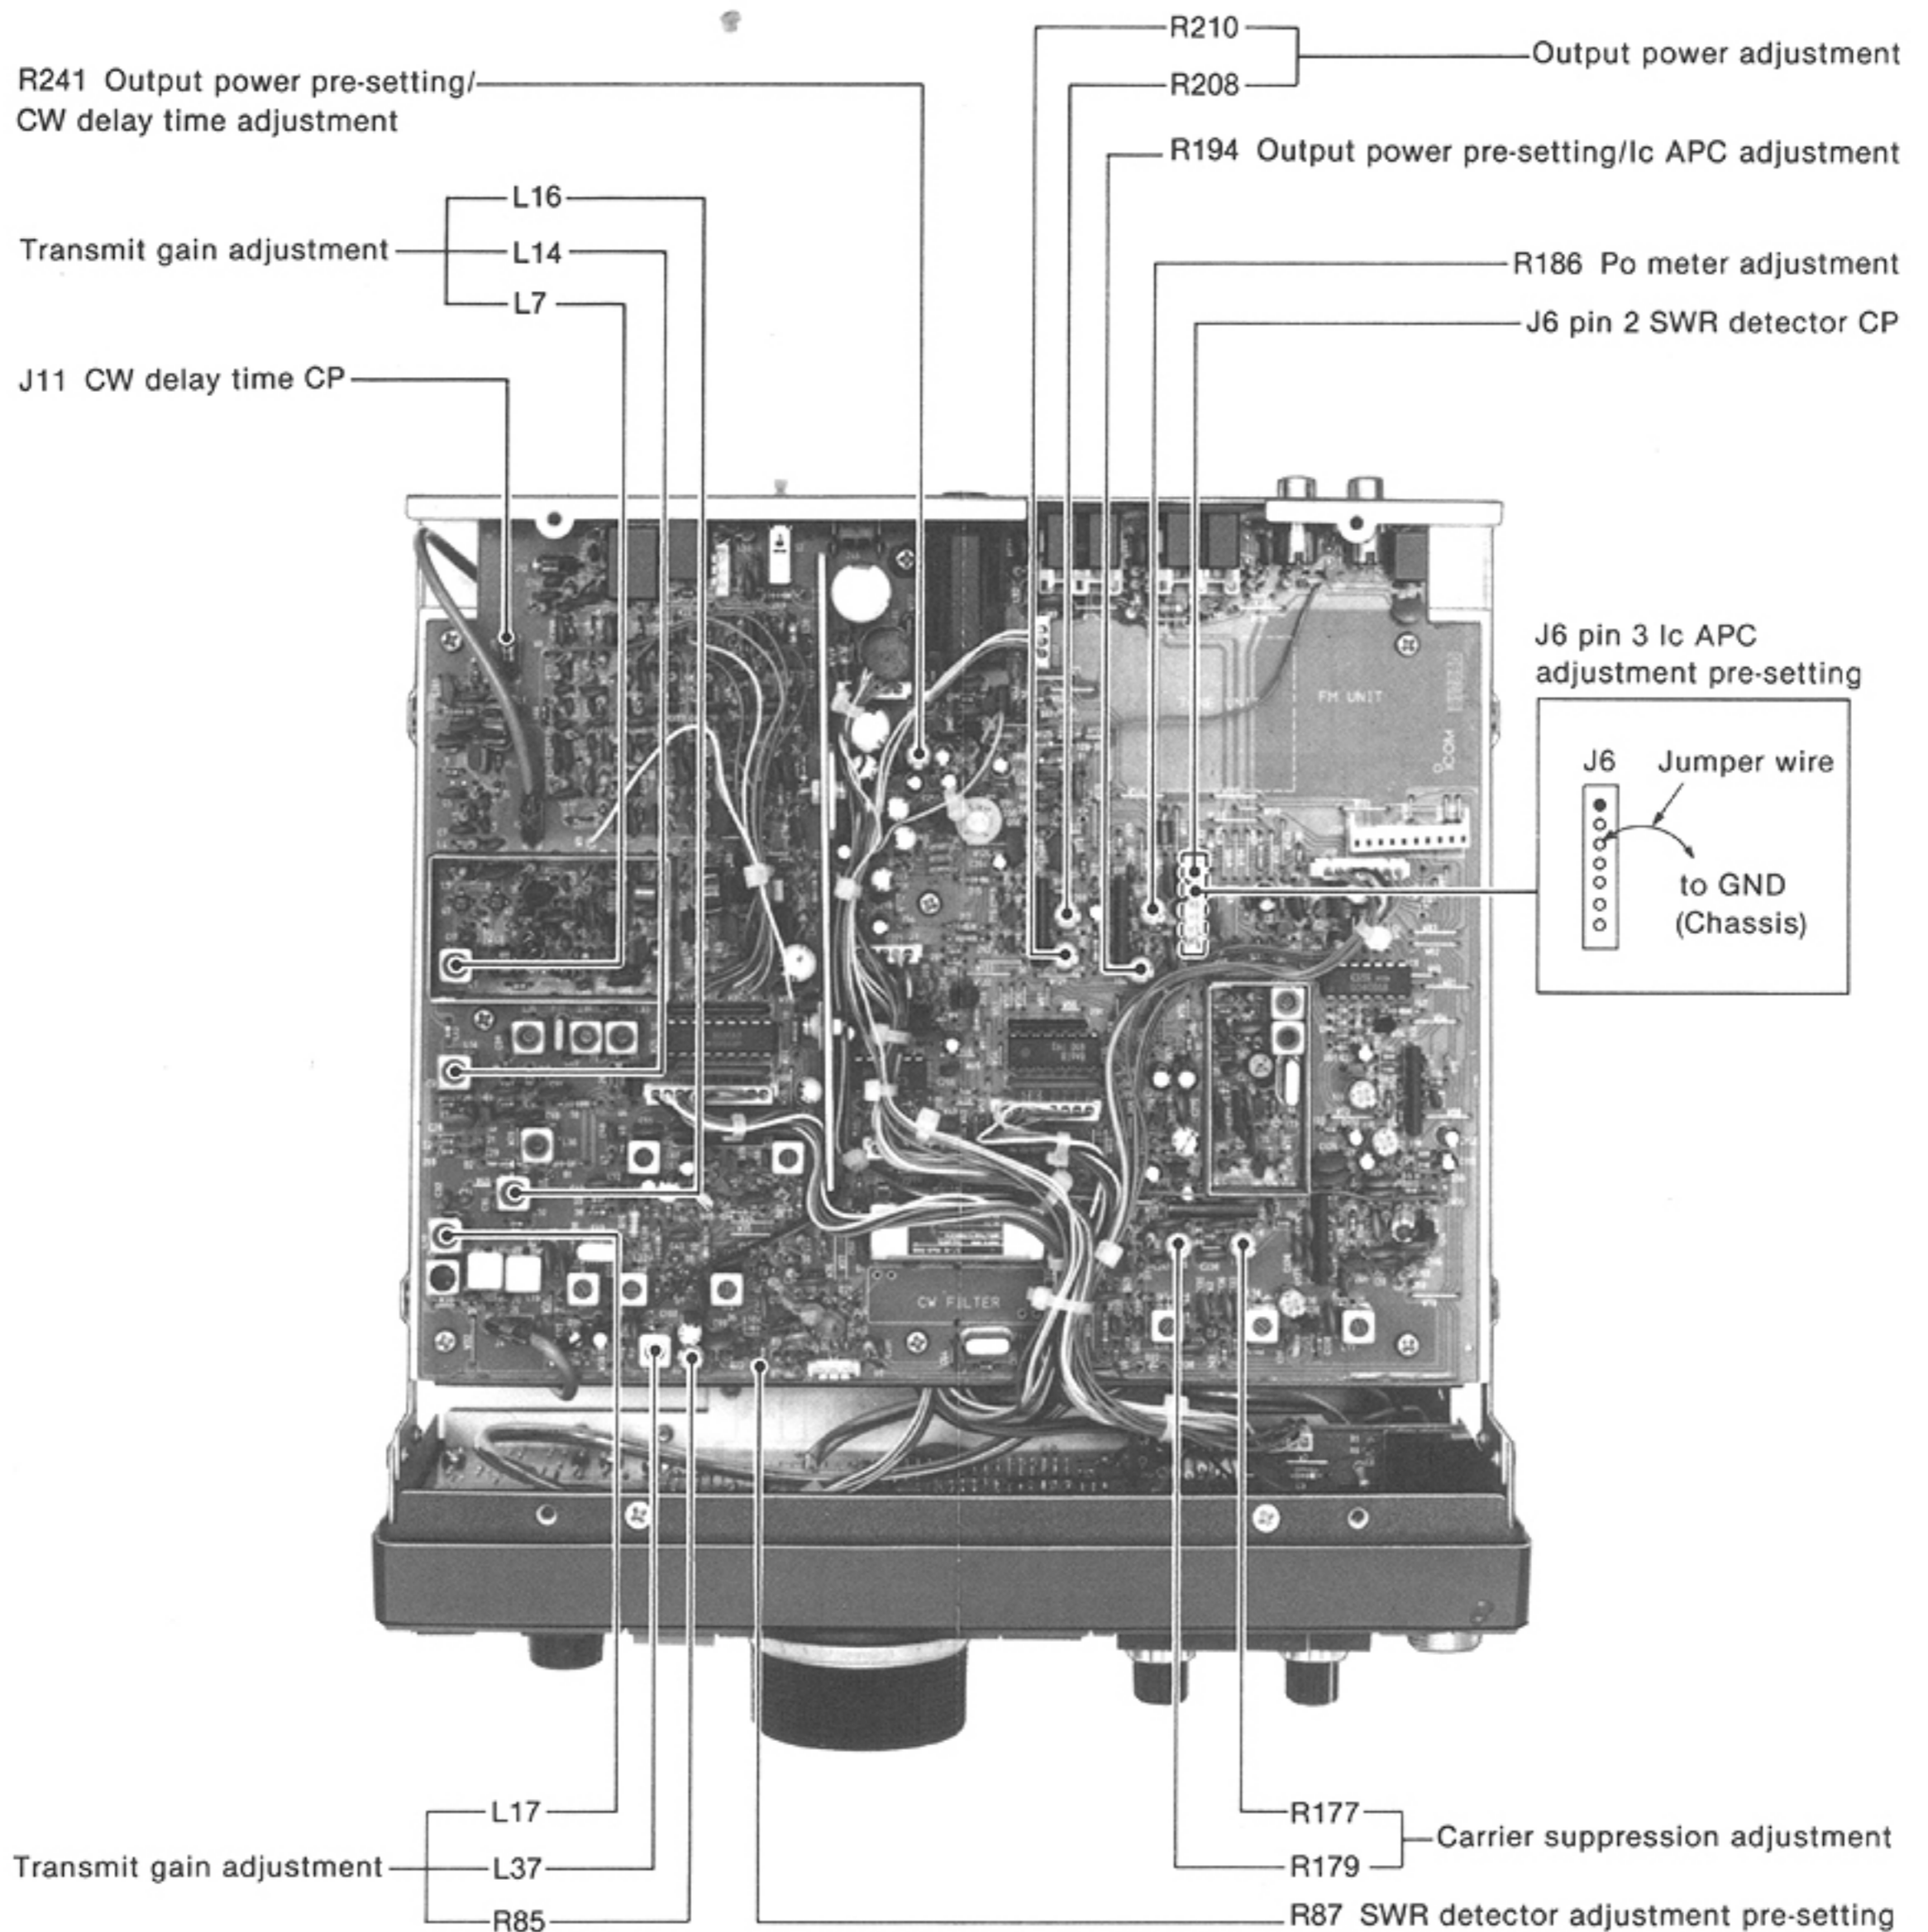




# SECTION 7 BOARD LAYOUTS

## 7-1 FRONT UNIT


### • SW UNIT

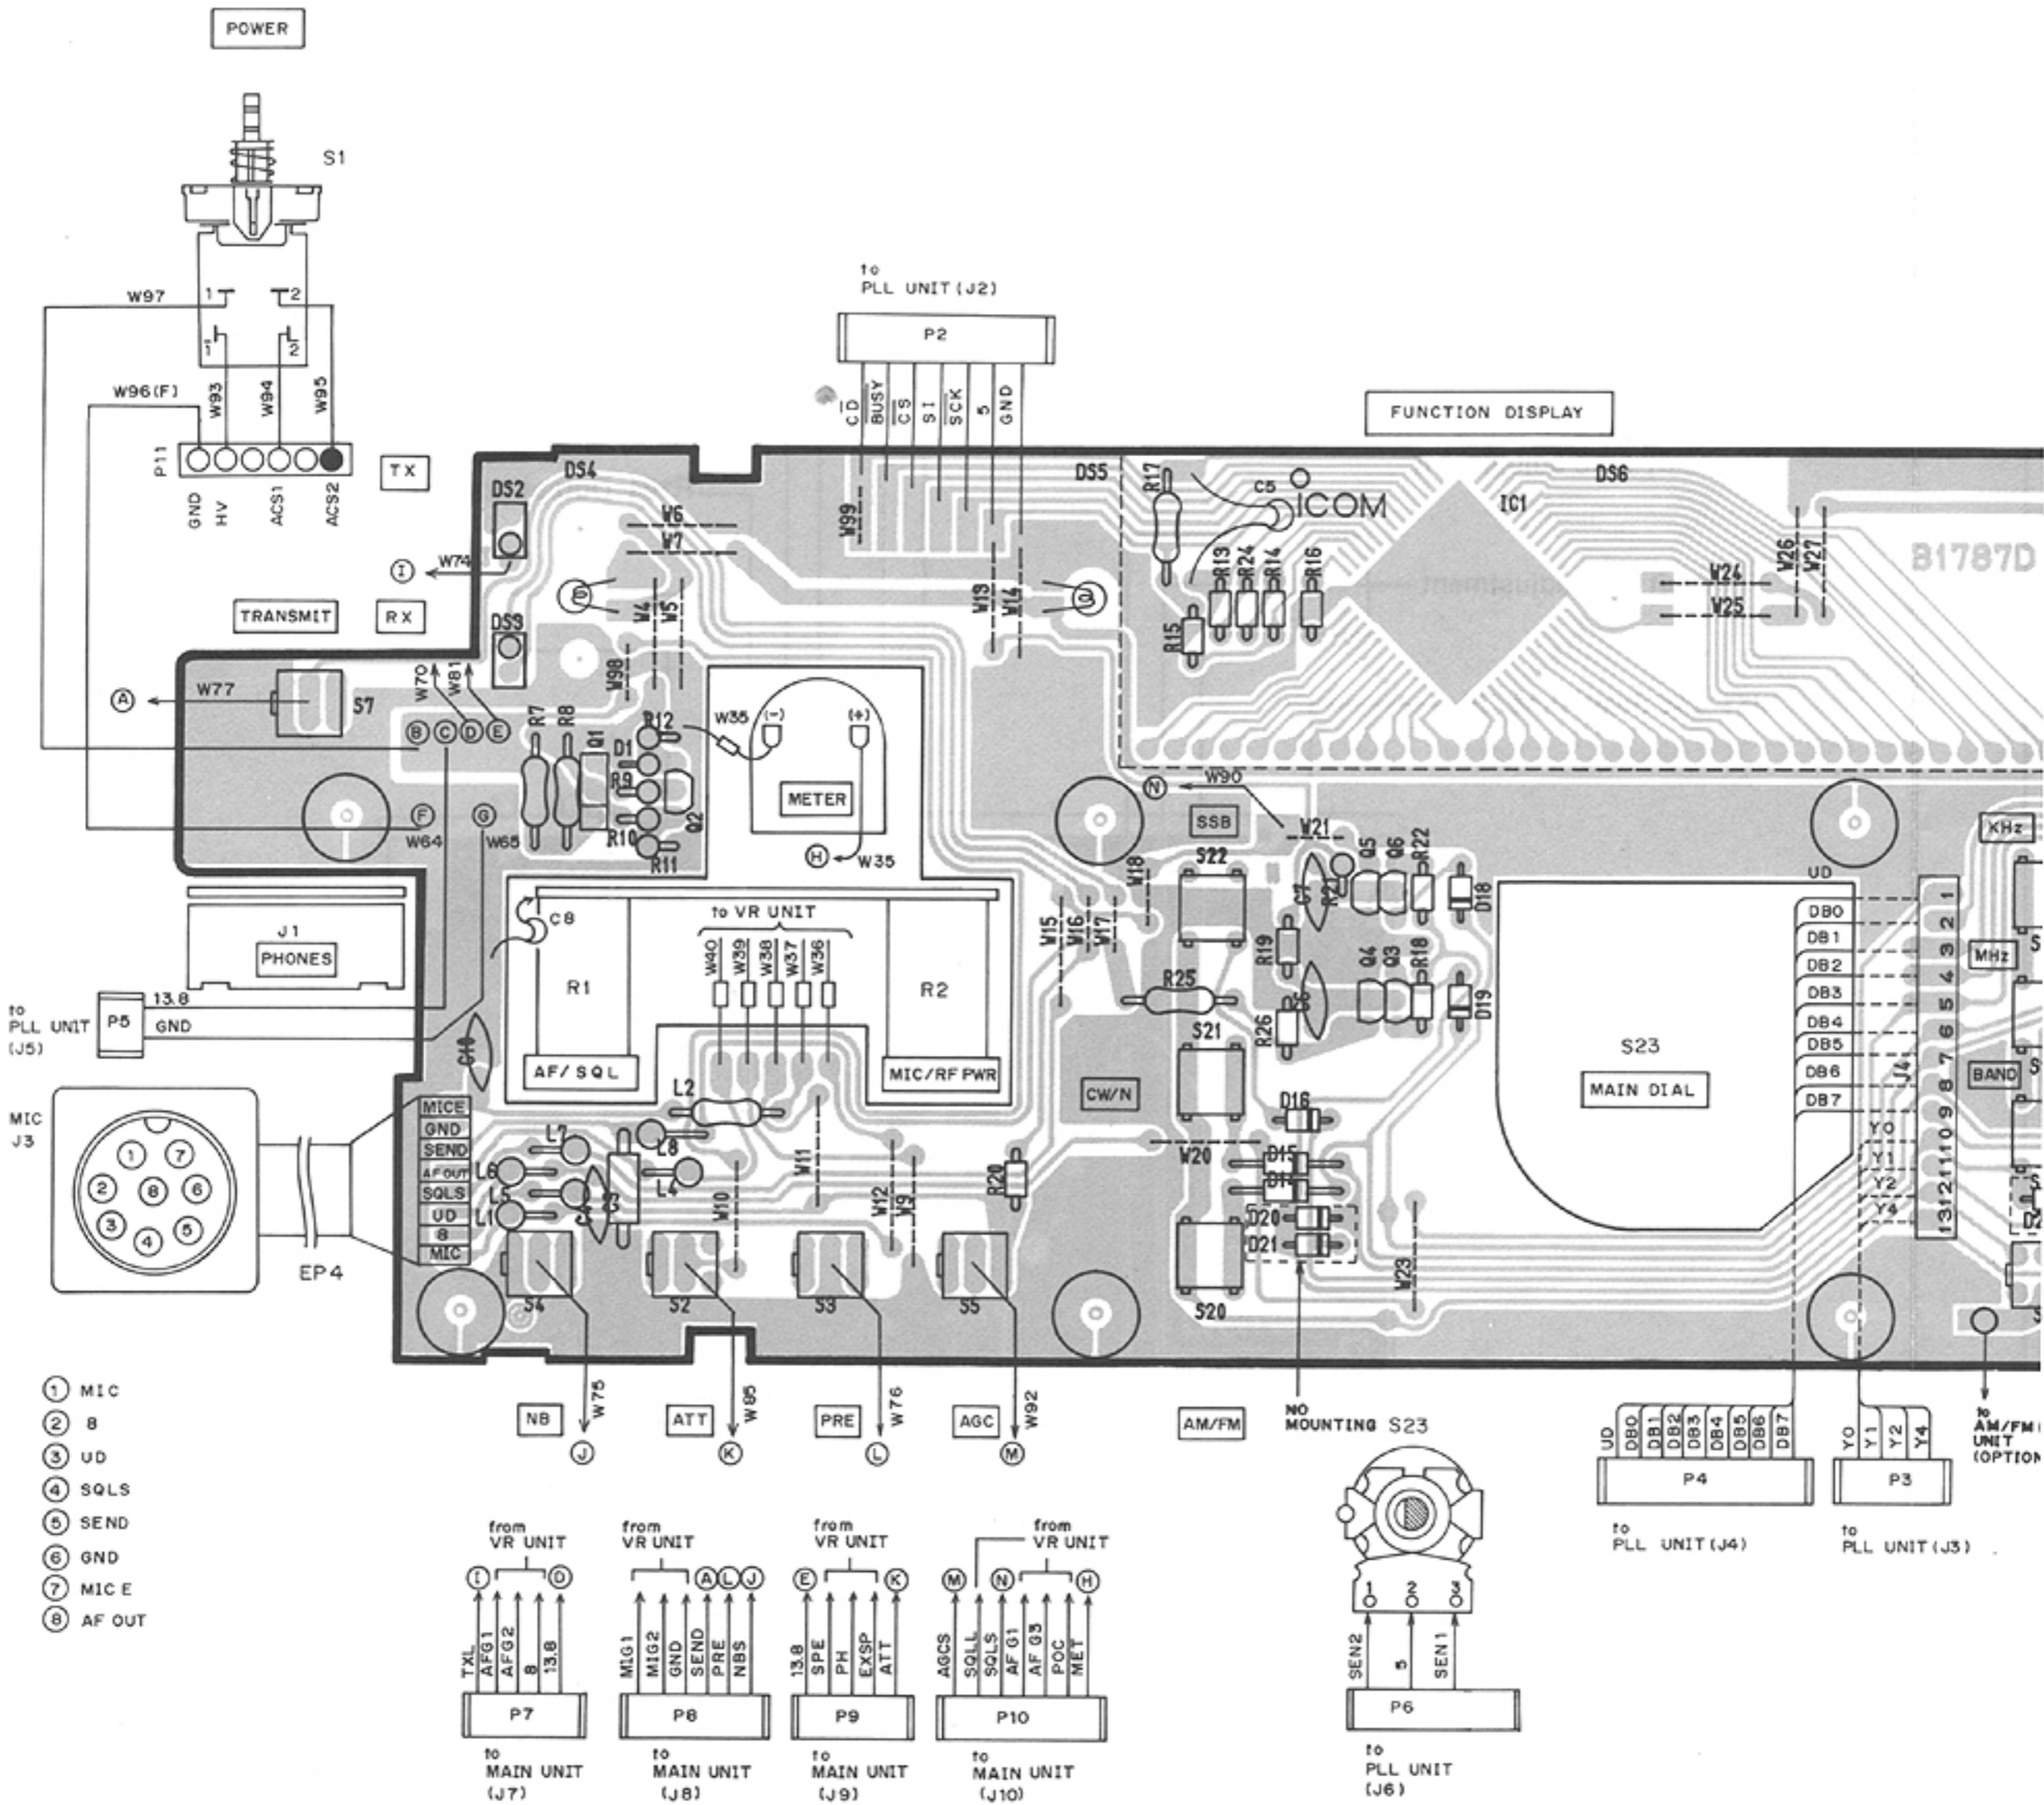




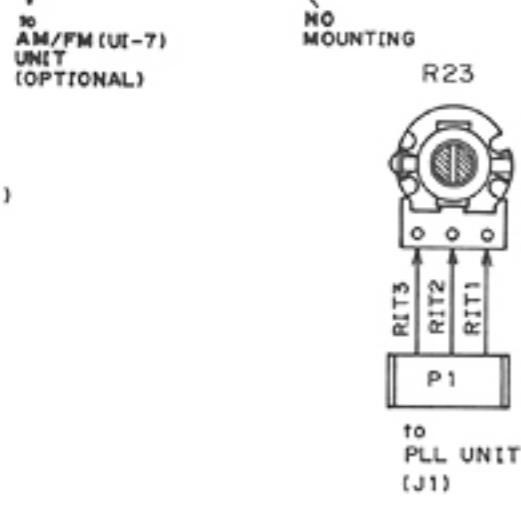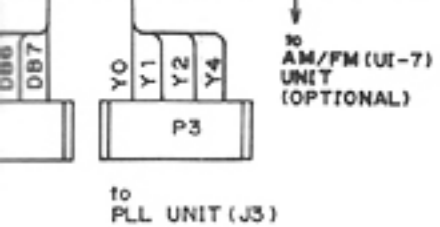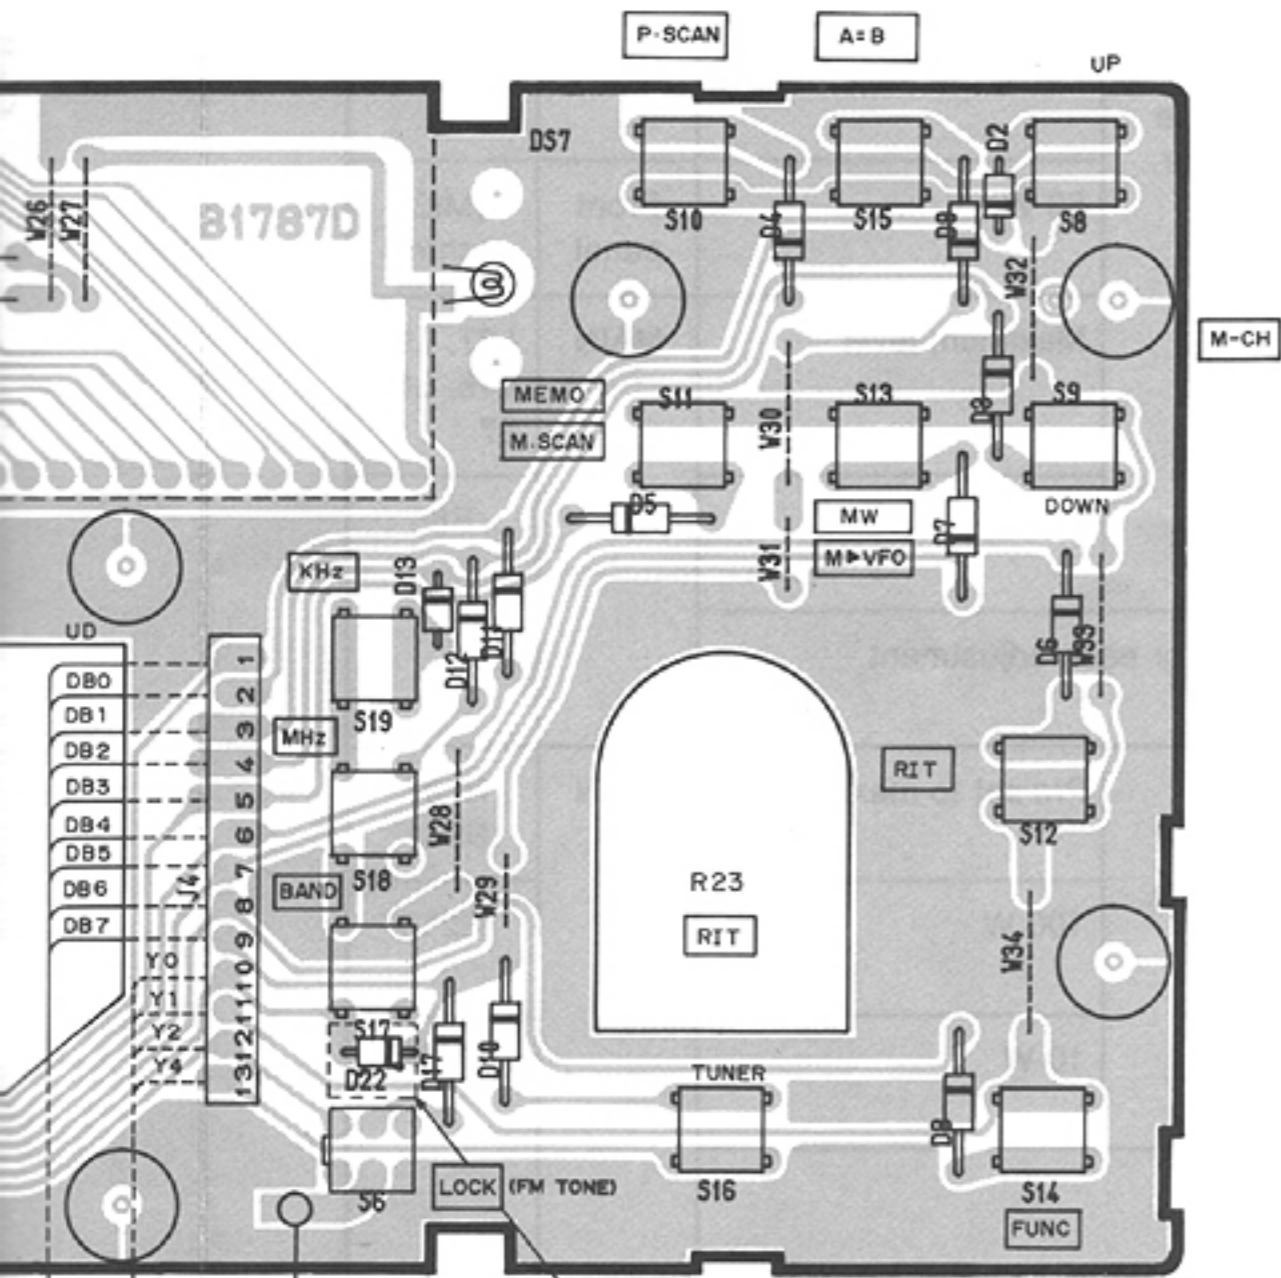


**2SB909M Q**  
Q1

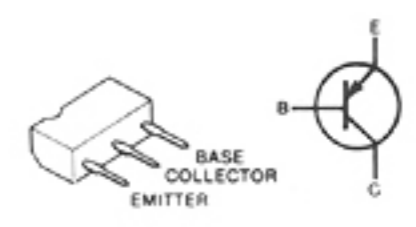


**2SC2458 GR**  
Q2, Q3, Q4, Q6

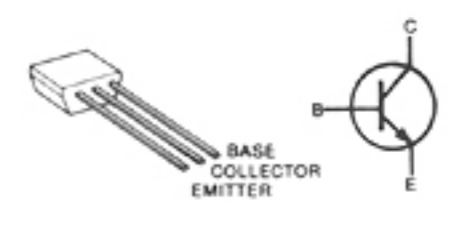









**RN1204**  
Q5

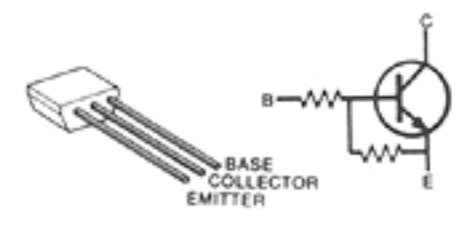

• **VR UNIT**

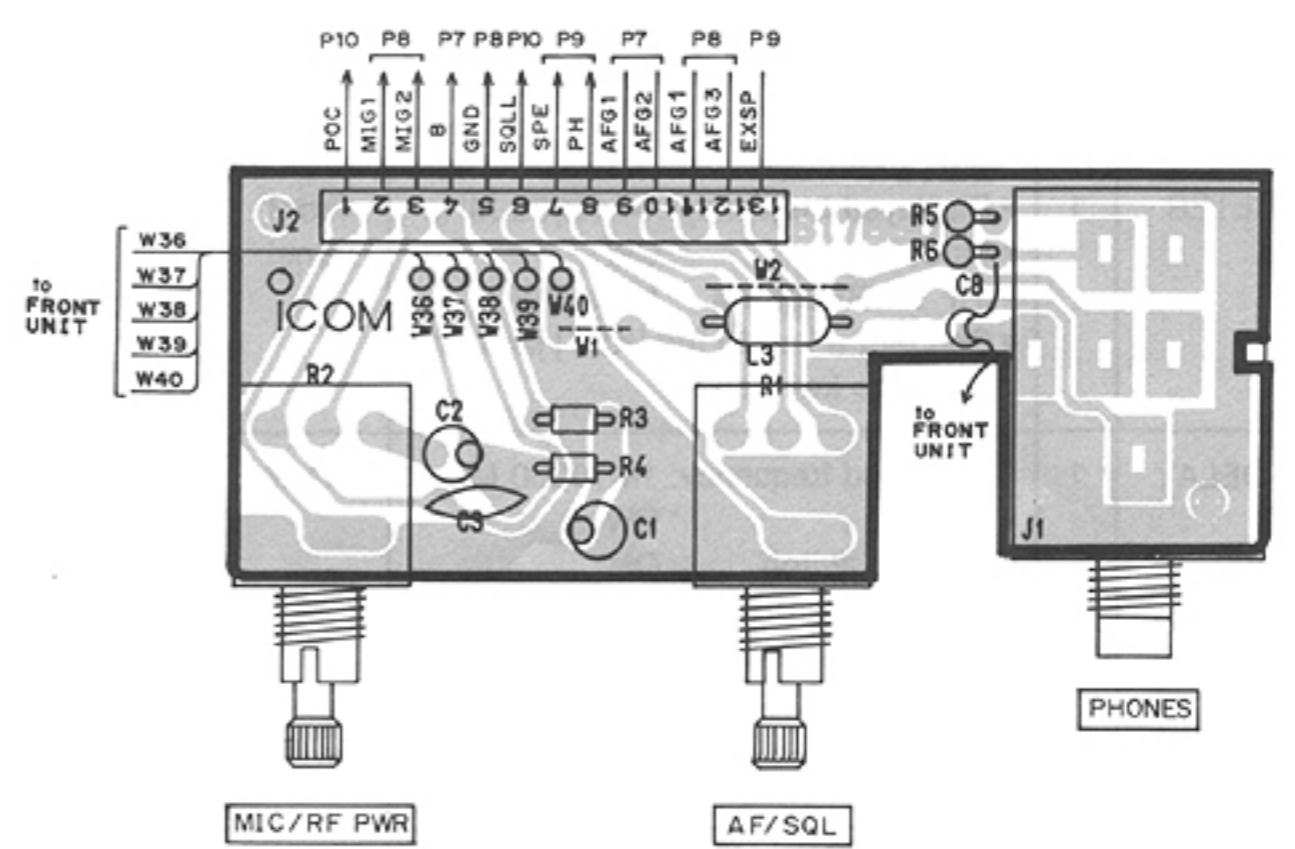

# 7-2 MAIN UNIT

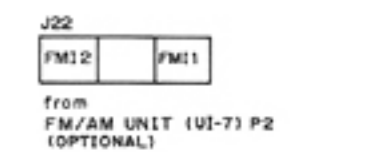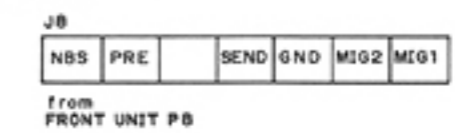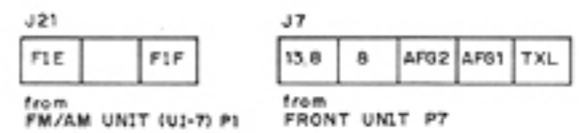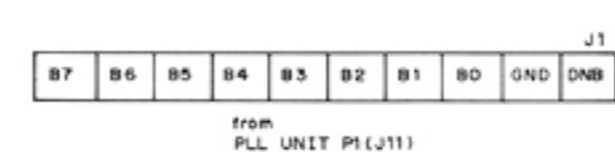

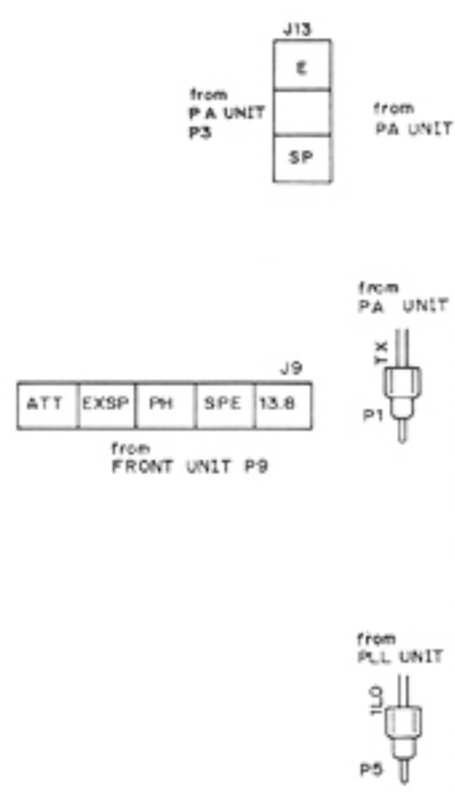
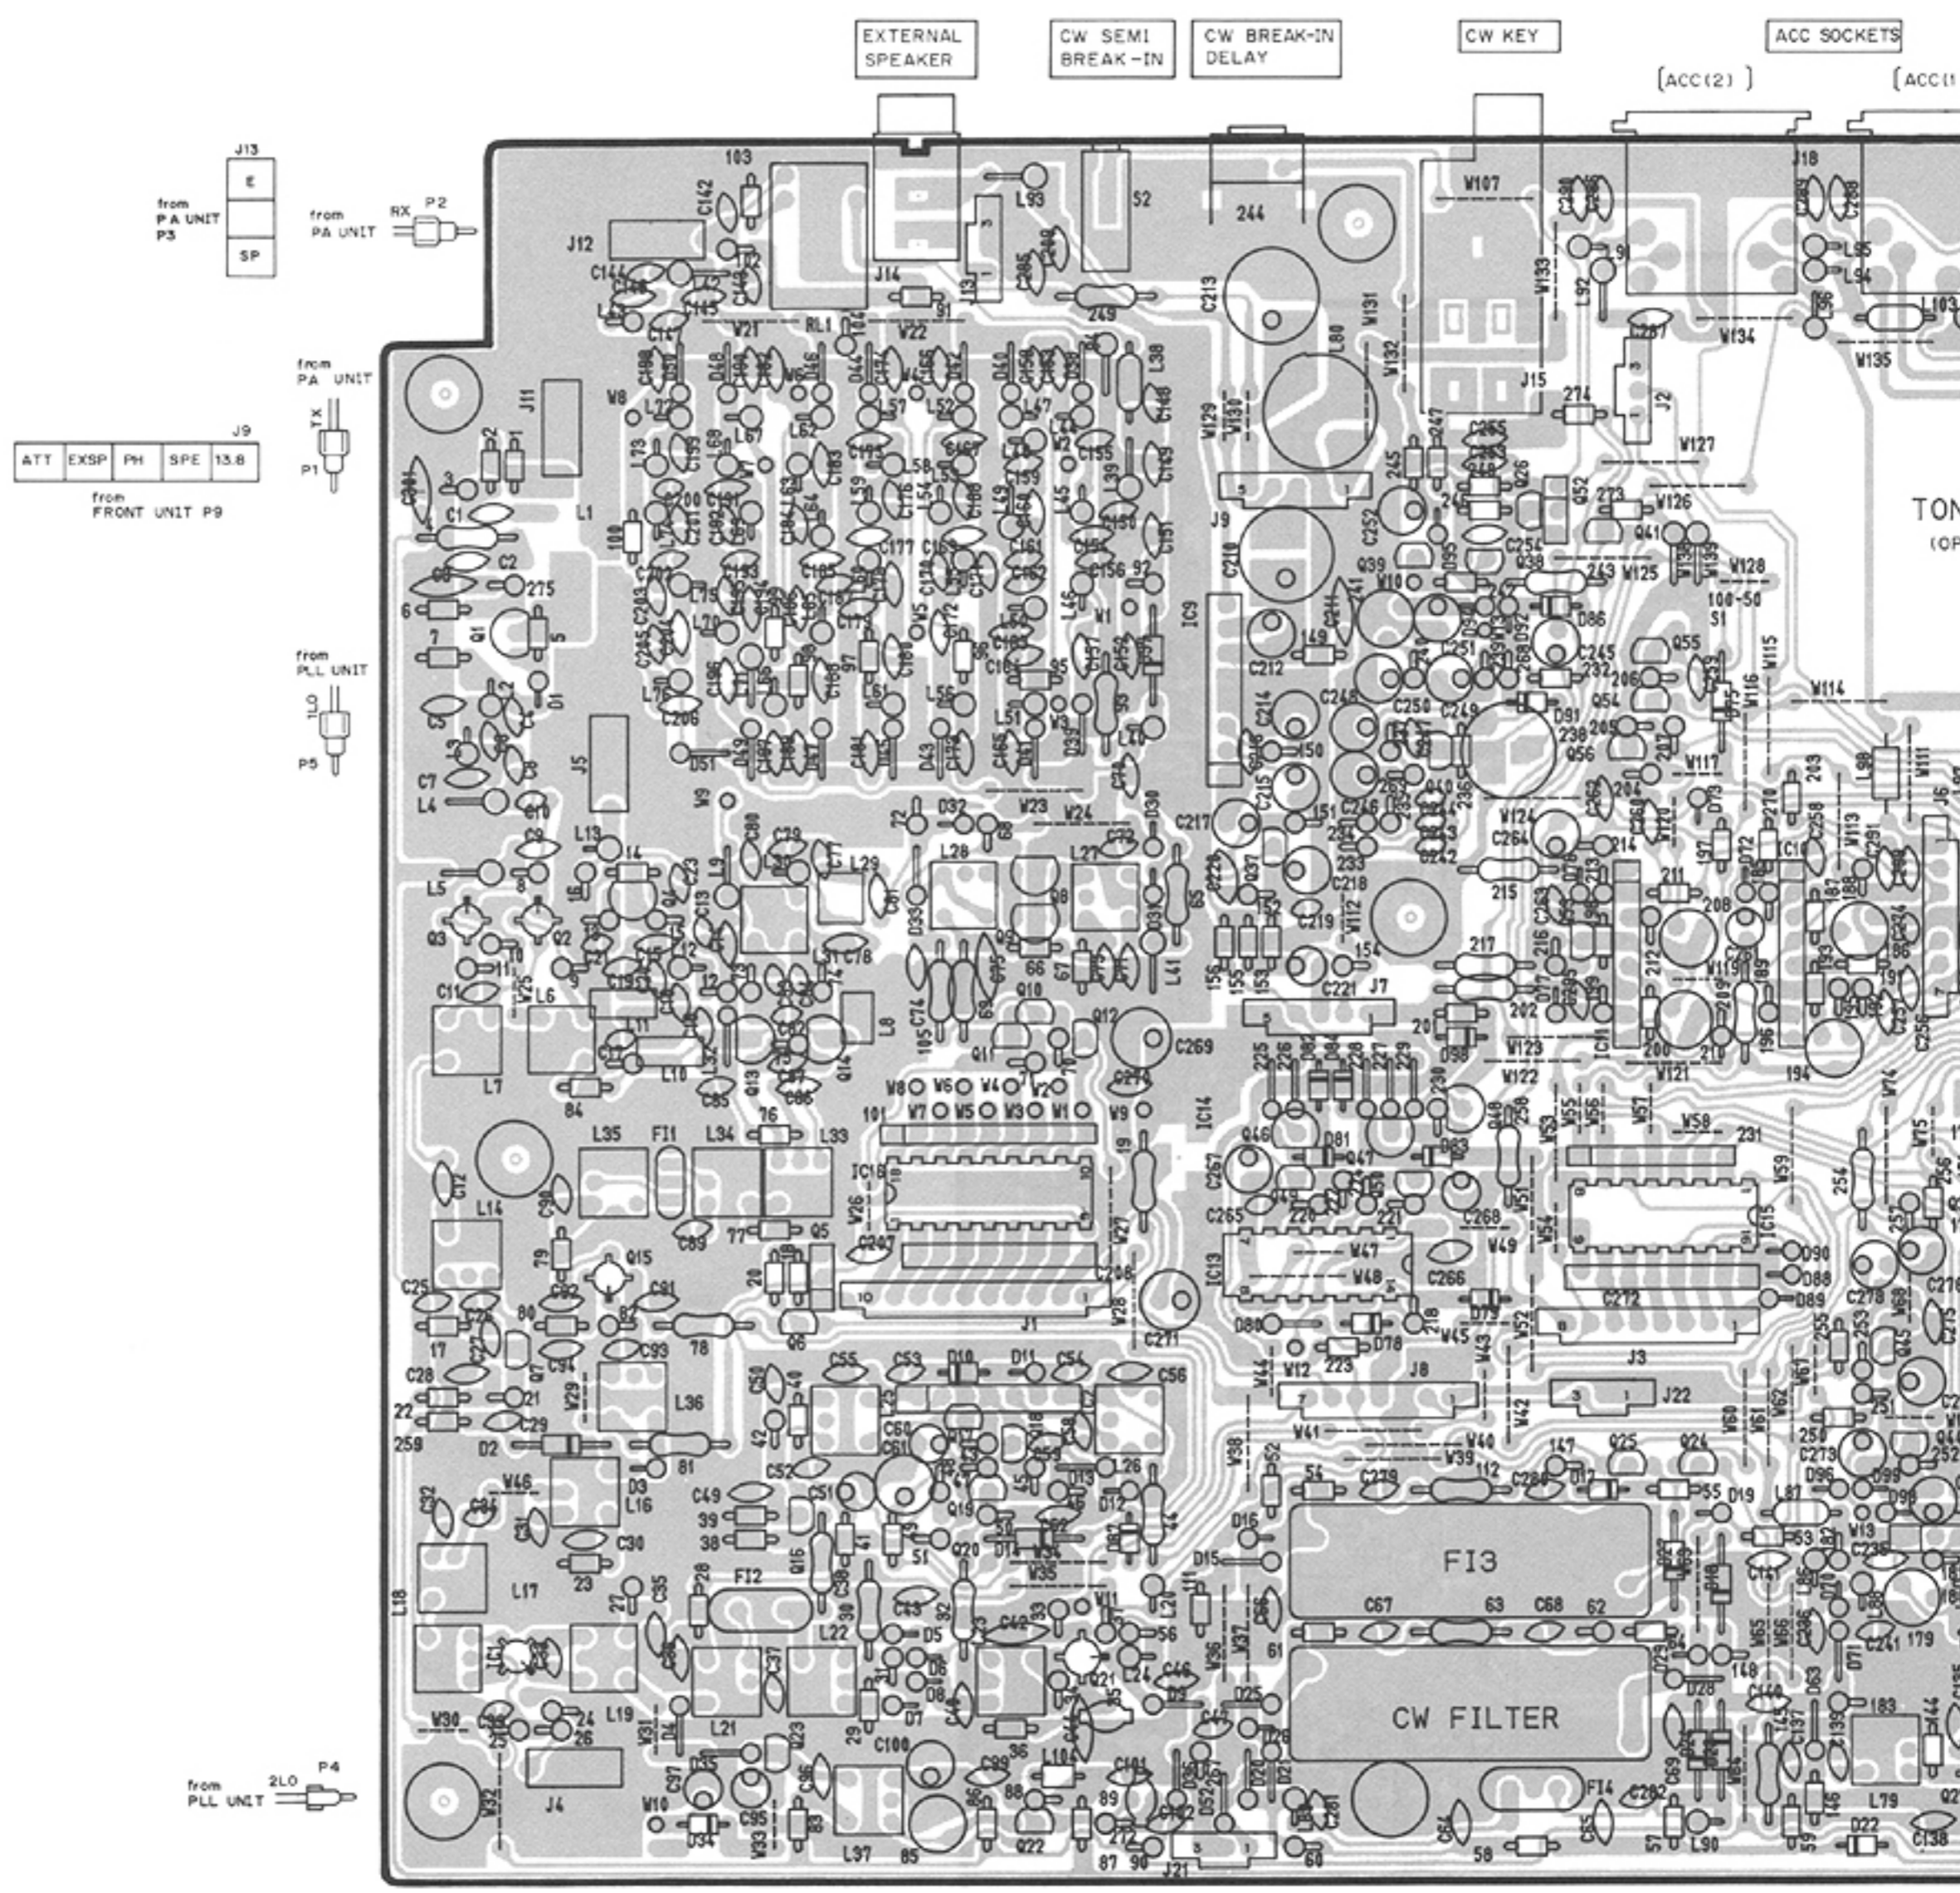



**2SA1048 GR**  
Q17, Q38, Q53

**2SB909M Q**  
Q5


**2SC2053**  
Q1, Q4

**2SC2458 GR**  
Q11, Q18, Q19, Q26, Q29, Q31, Q35, Q36, Q37, Q40, Q44, Q45, Q49, Q50, Q56

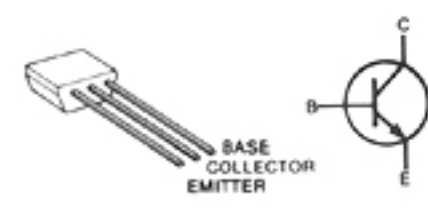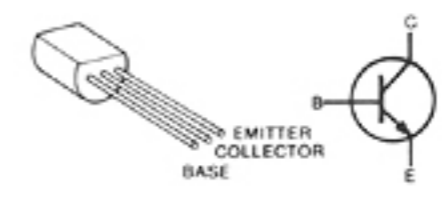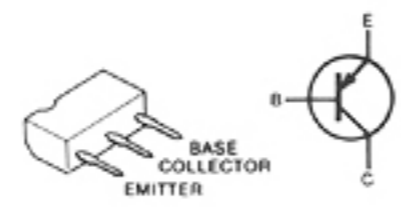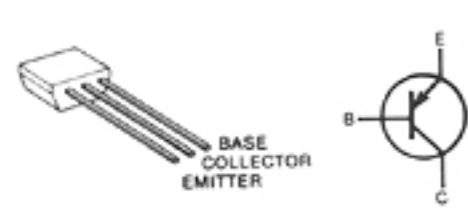


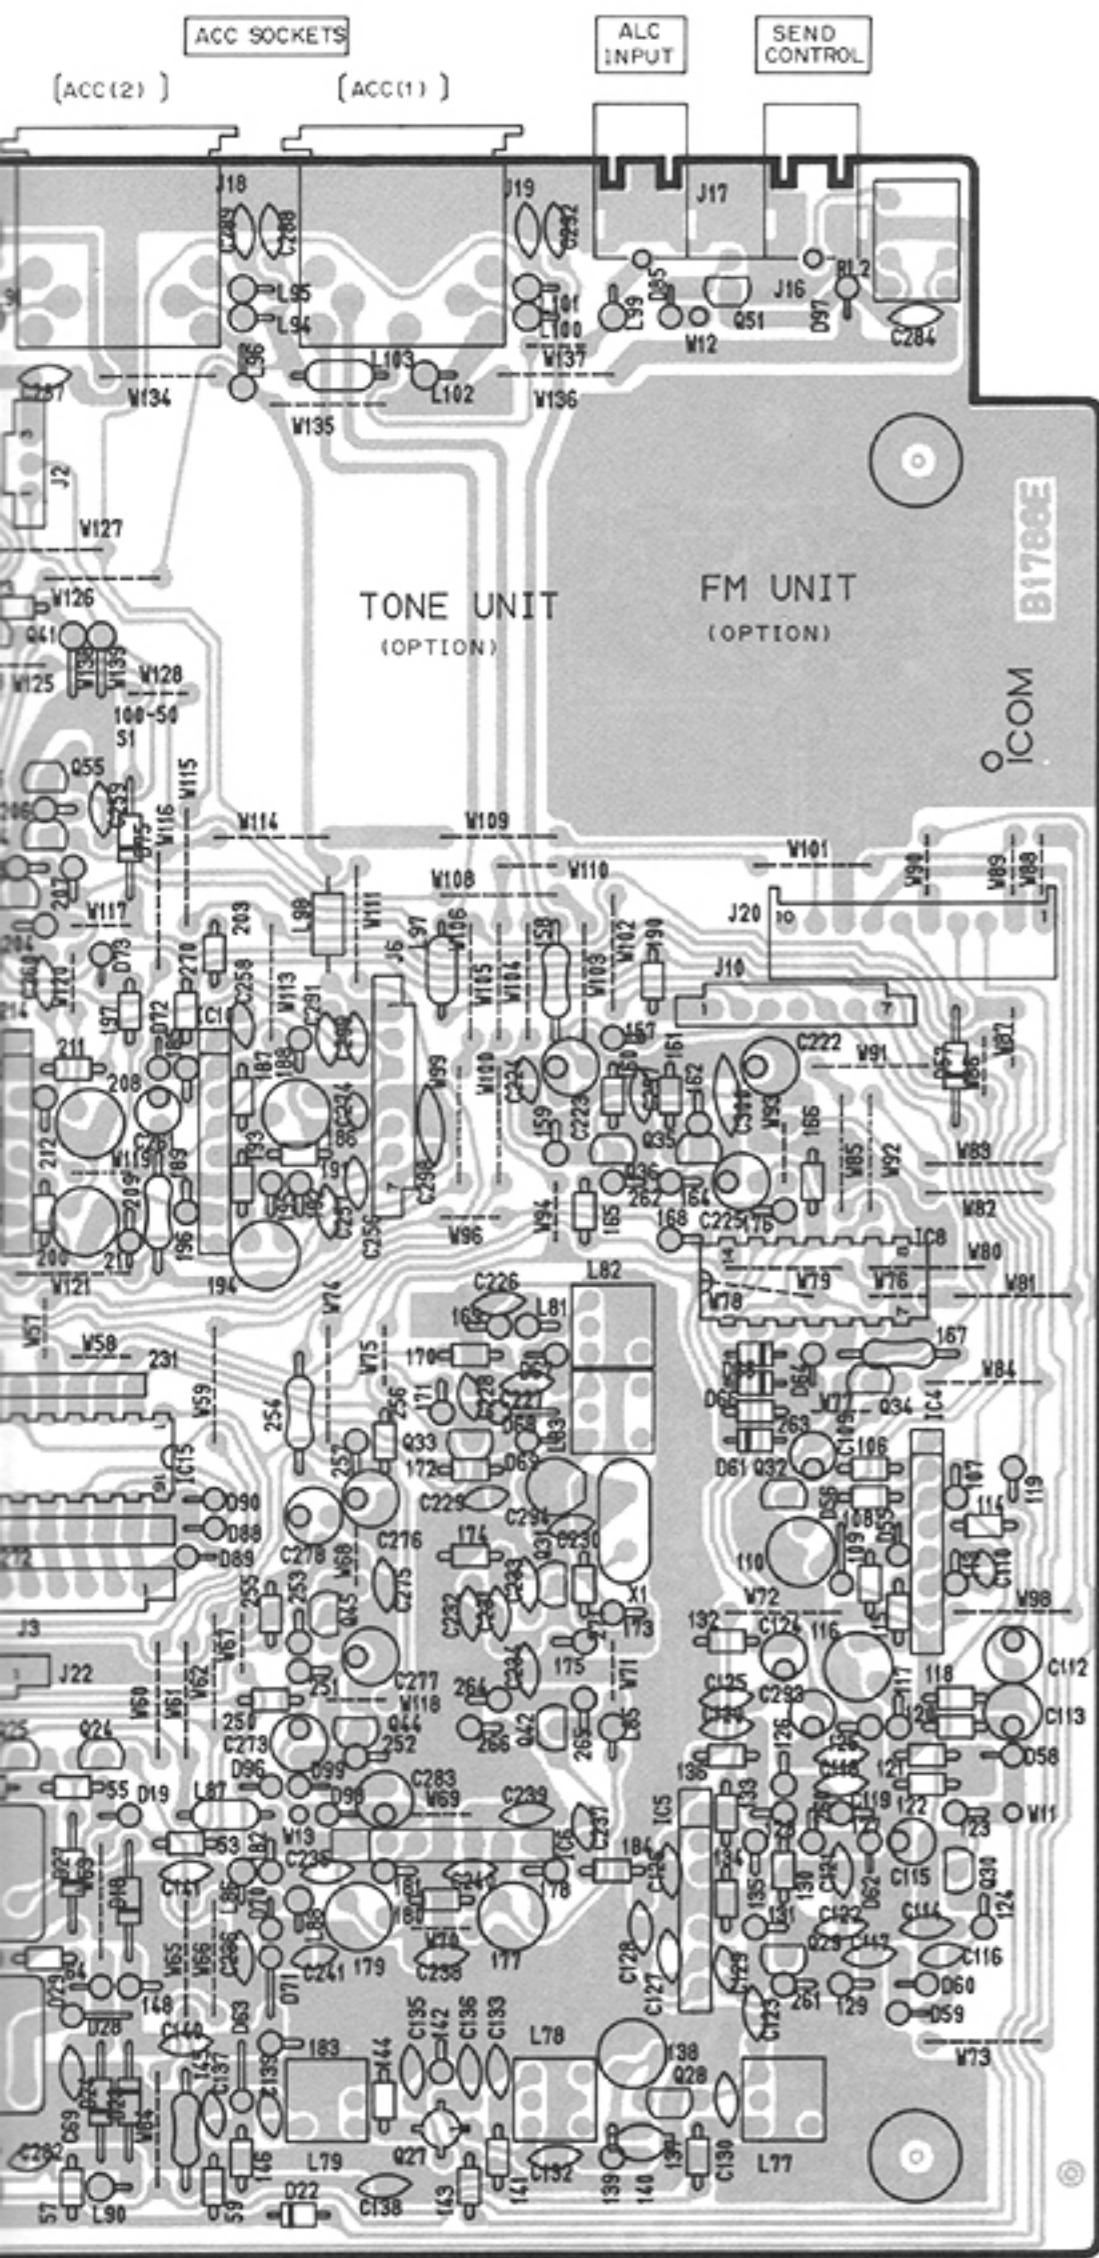


**2SK125**  
Q13, Q14, Q8,  
Q9

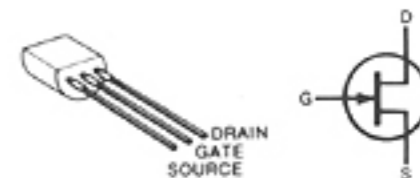


**2SK192A-Y**  
Q16

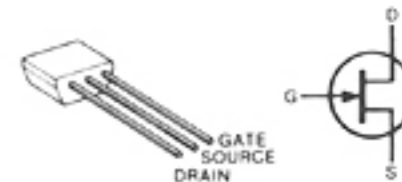


**2SK241 Y**  
Q22, Q28, Q7

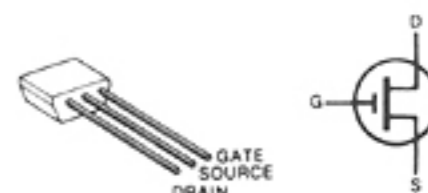


**3SK74 K/M**  
Q2, Q3, Q15,  
Q21, Q27

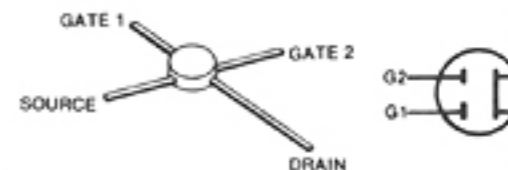


**RN1202**  
Q12, Q23, Q32,  
Q34, Q51, Q6

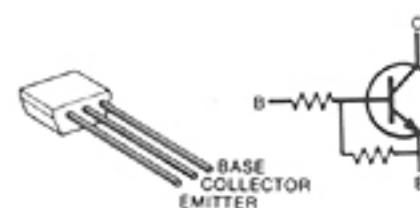

**RN1204**  
Q33, Q39, Q54,  
Q55

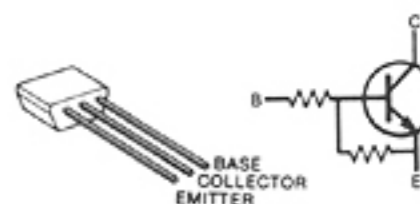

**RN2202**  
Q10, Q20, Q24,  
Q25, Q41

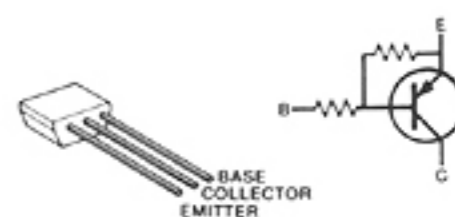

J2  
BAND  
-5  
20M  
from  
PLL UNIT  
P2 (J9)

J20  
from  
AM FM UNIT (U1-7) J1  
(OPTIONAL)

|      |     |    |     |    |     |     |    |   |
|------|-----|----|-----|----|-----|-----|----|---|
| AMLC | GND | AF | FSM | TB | AMB | FM8 | R8 | 8 |
|------|-----|----|-----|----|-----|-----|----|---|

J10  
MET POC AFG3 AFG1 SGLS SGLL AGCS

J6  
from  
FRONT UNIT (P10)

|      |     |     |     |     |     |      |
|------|-----|-----|-----|-----|-----|------|
| 13.8 | REF | FOR | GNP | ICL | ICM | PAT8 |
|------|-----|-----|-----|-----|-----|------|

from  
P A UNIT  
P6


J3  
TUNK 8 FM NAR AM LSB CW USB

from  
PLL UNIT P3 (J10)


J22  
FM12 FM1

from  
FM/AM UNIT (U1-7) P2  
(OPTIONAL)


**C2458 GR**  
1, Q18, Q19, Q26, Q29, Q30,  
11, Q35, Q36, Q37, Q40, Q42,  
4, Q45, Q49, Q50, Q56

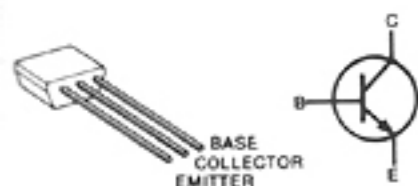










**2SD1225M R**  
Q52

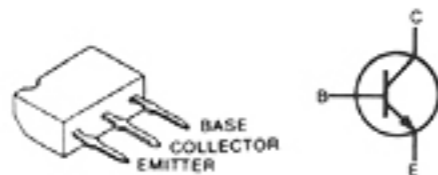

**2SD468C**  
Q46, Q47, Q48

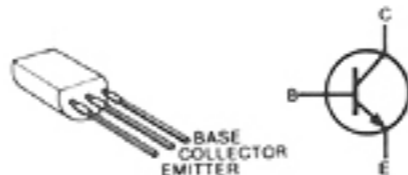

# 7-3 PLL UNIT

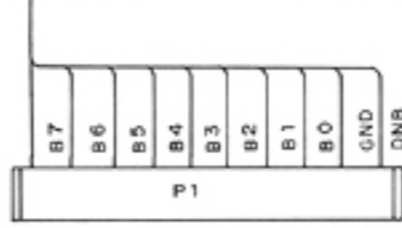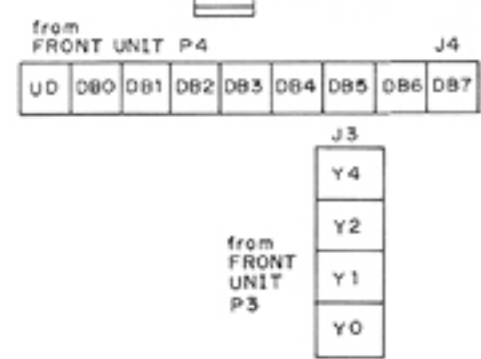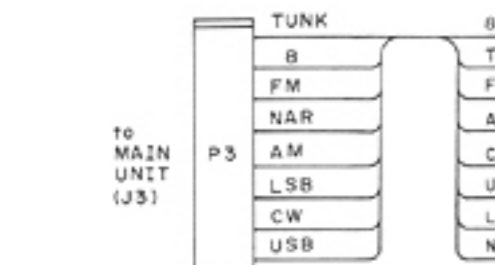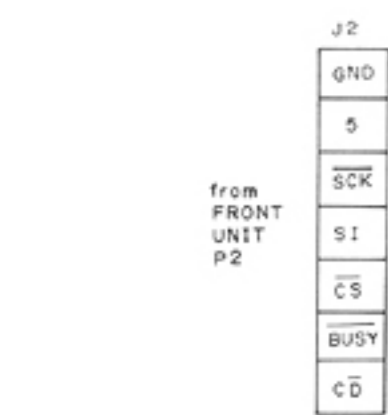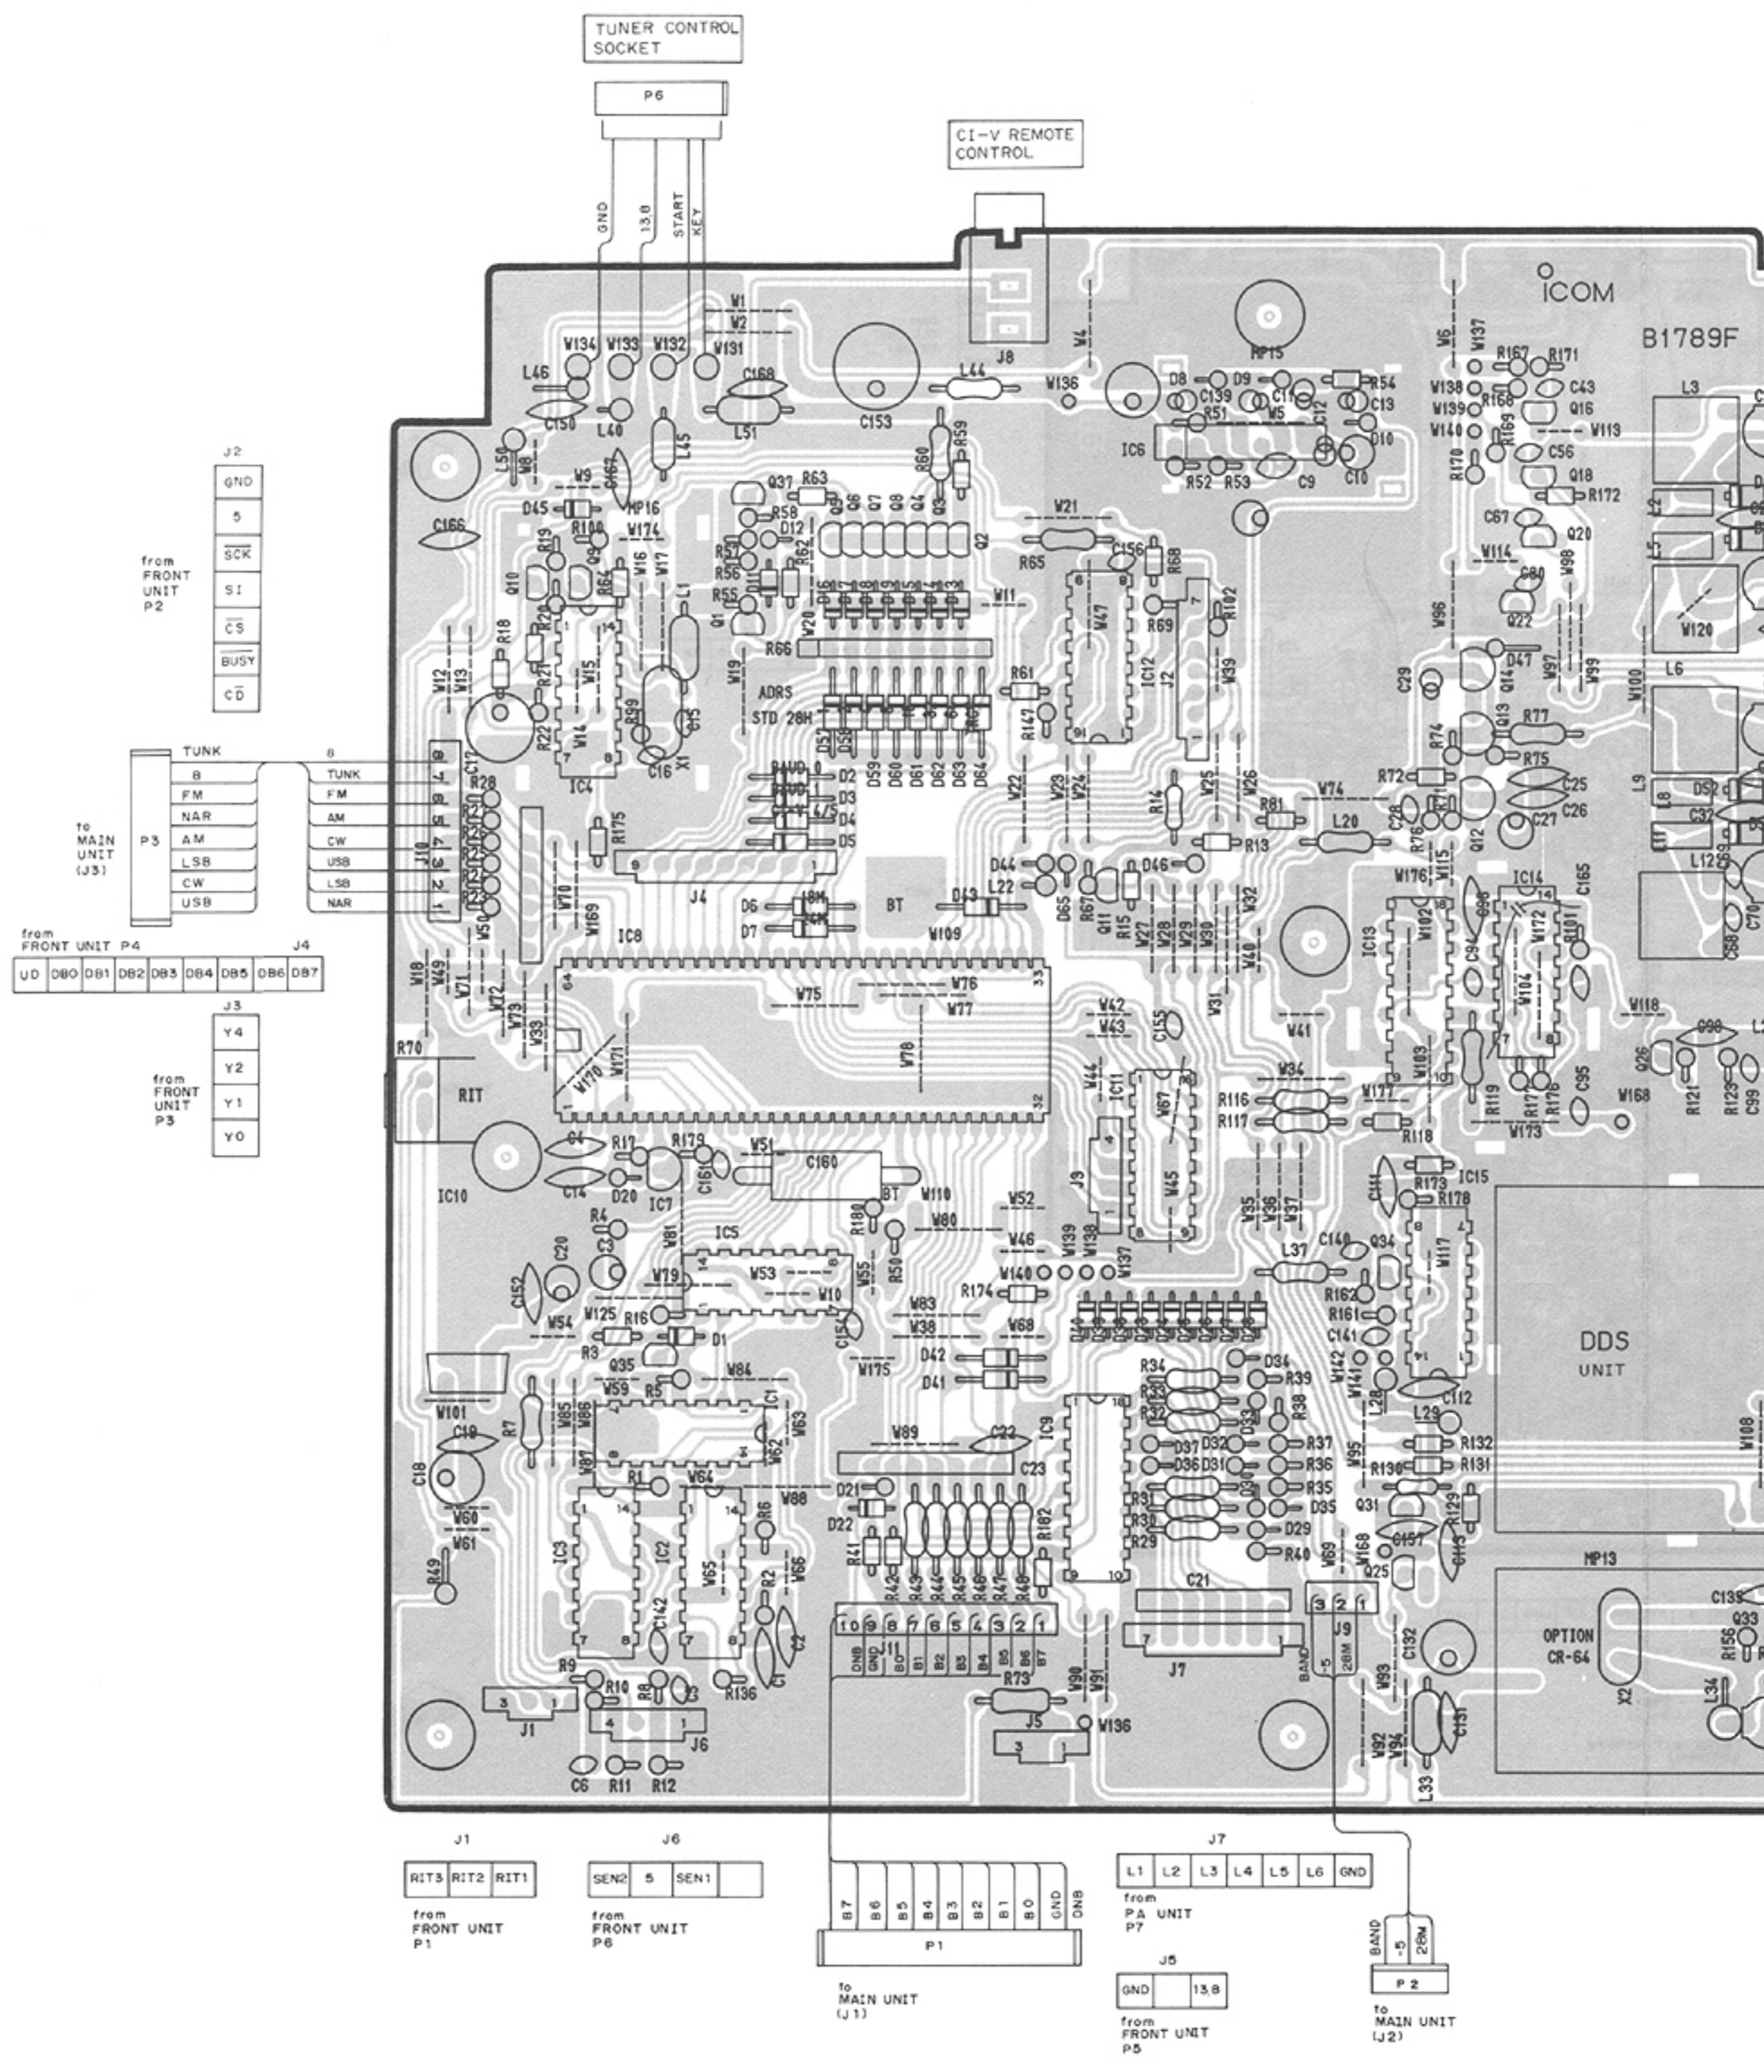





**2SA1048 GR**  
Q37




**2SC1571G**  
Q12

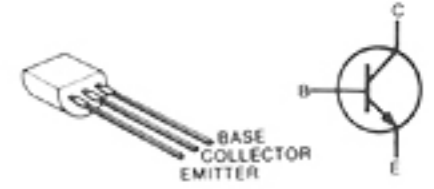


**2SC2458 GR/Y**  
Q1, Q10, Q11,  
Q13, Q14, Q16,  
Q18, Q2, Q20,  
Q22, Q3, Q33,  
Q4, Q5, Q6,  
Q7, Q8, Q9,  
Q32

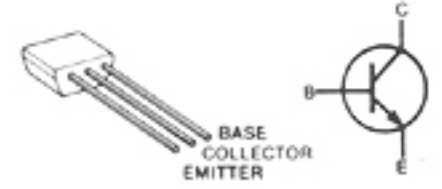


**2SC2668 O**  
Q23, Q24, Q26,  
Q27, Q30, Q34,  
Q36

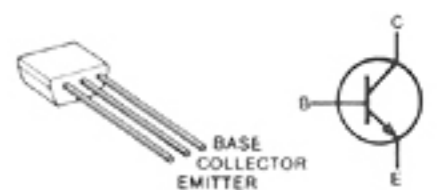


**2SK192A GR**  
Q15, Q17, Q19,  
Q21, Q29

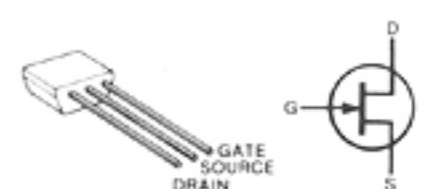

**RN1202**  
Q25, Q35

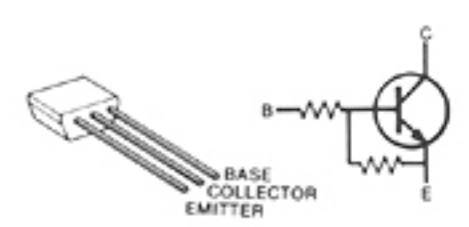


**RN2202**  
Q31

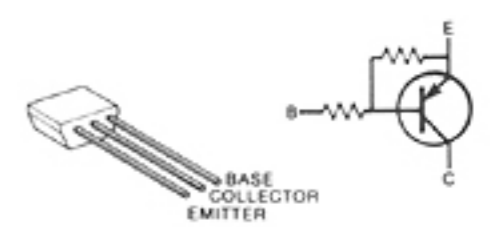


# 7-4 PA UNIT


## • FILTER UNIT

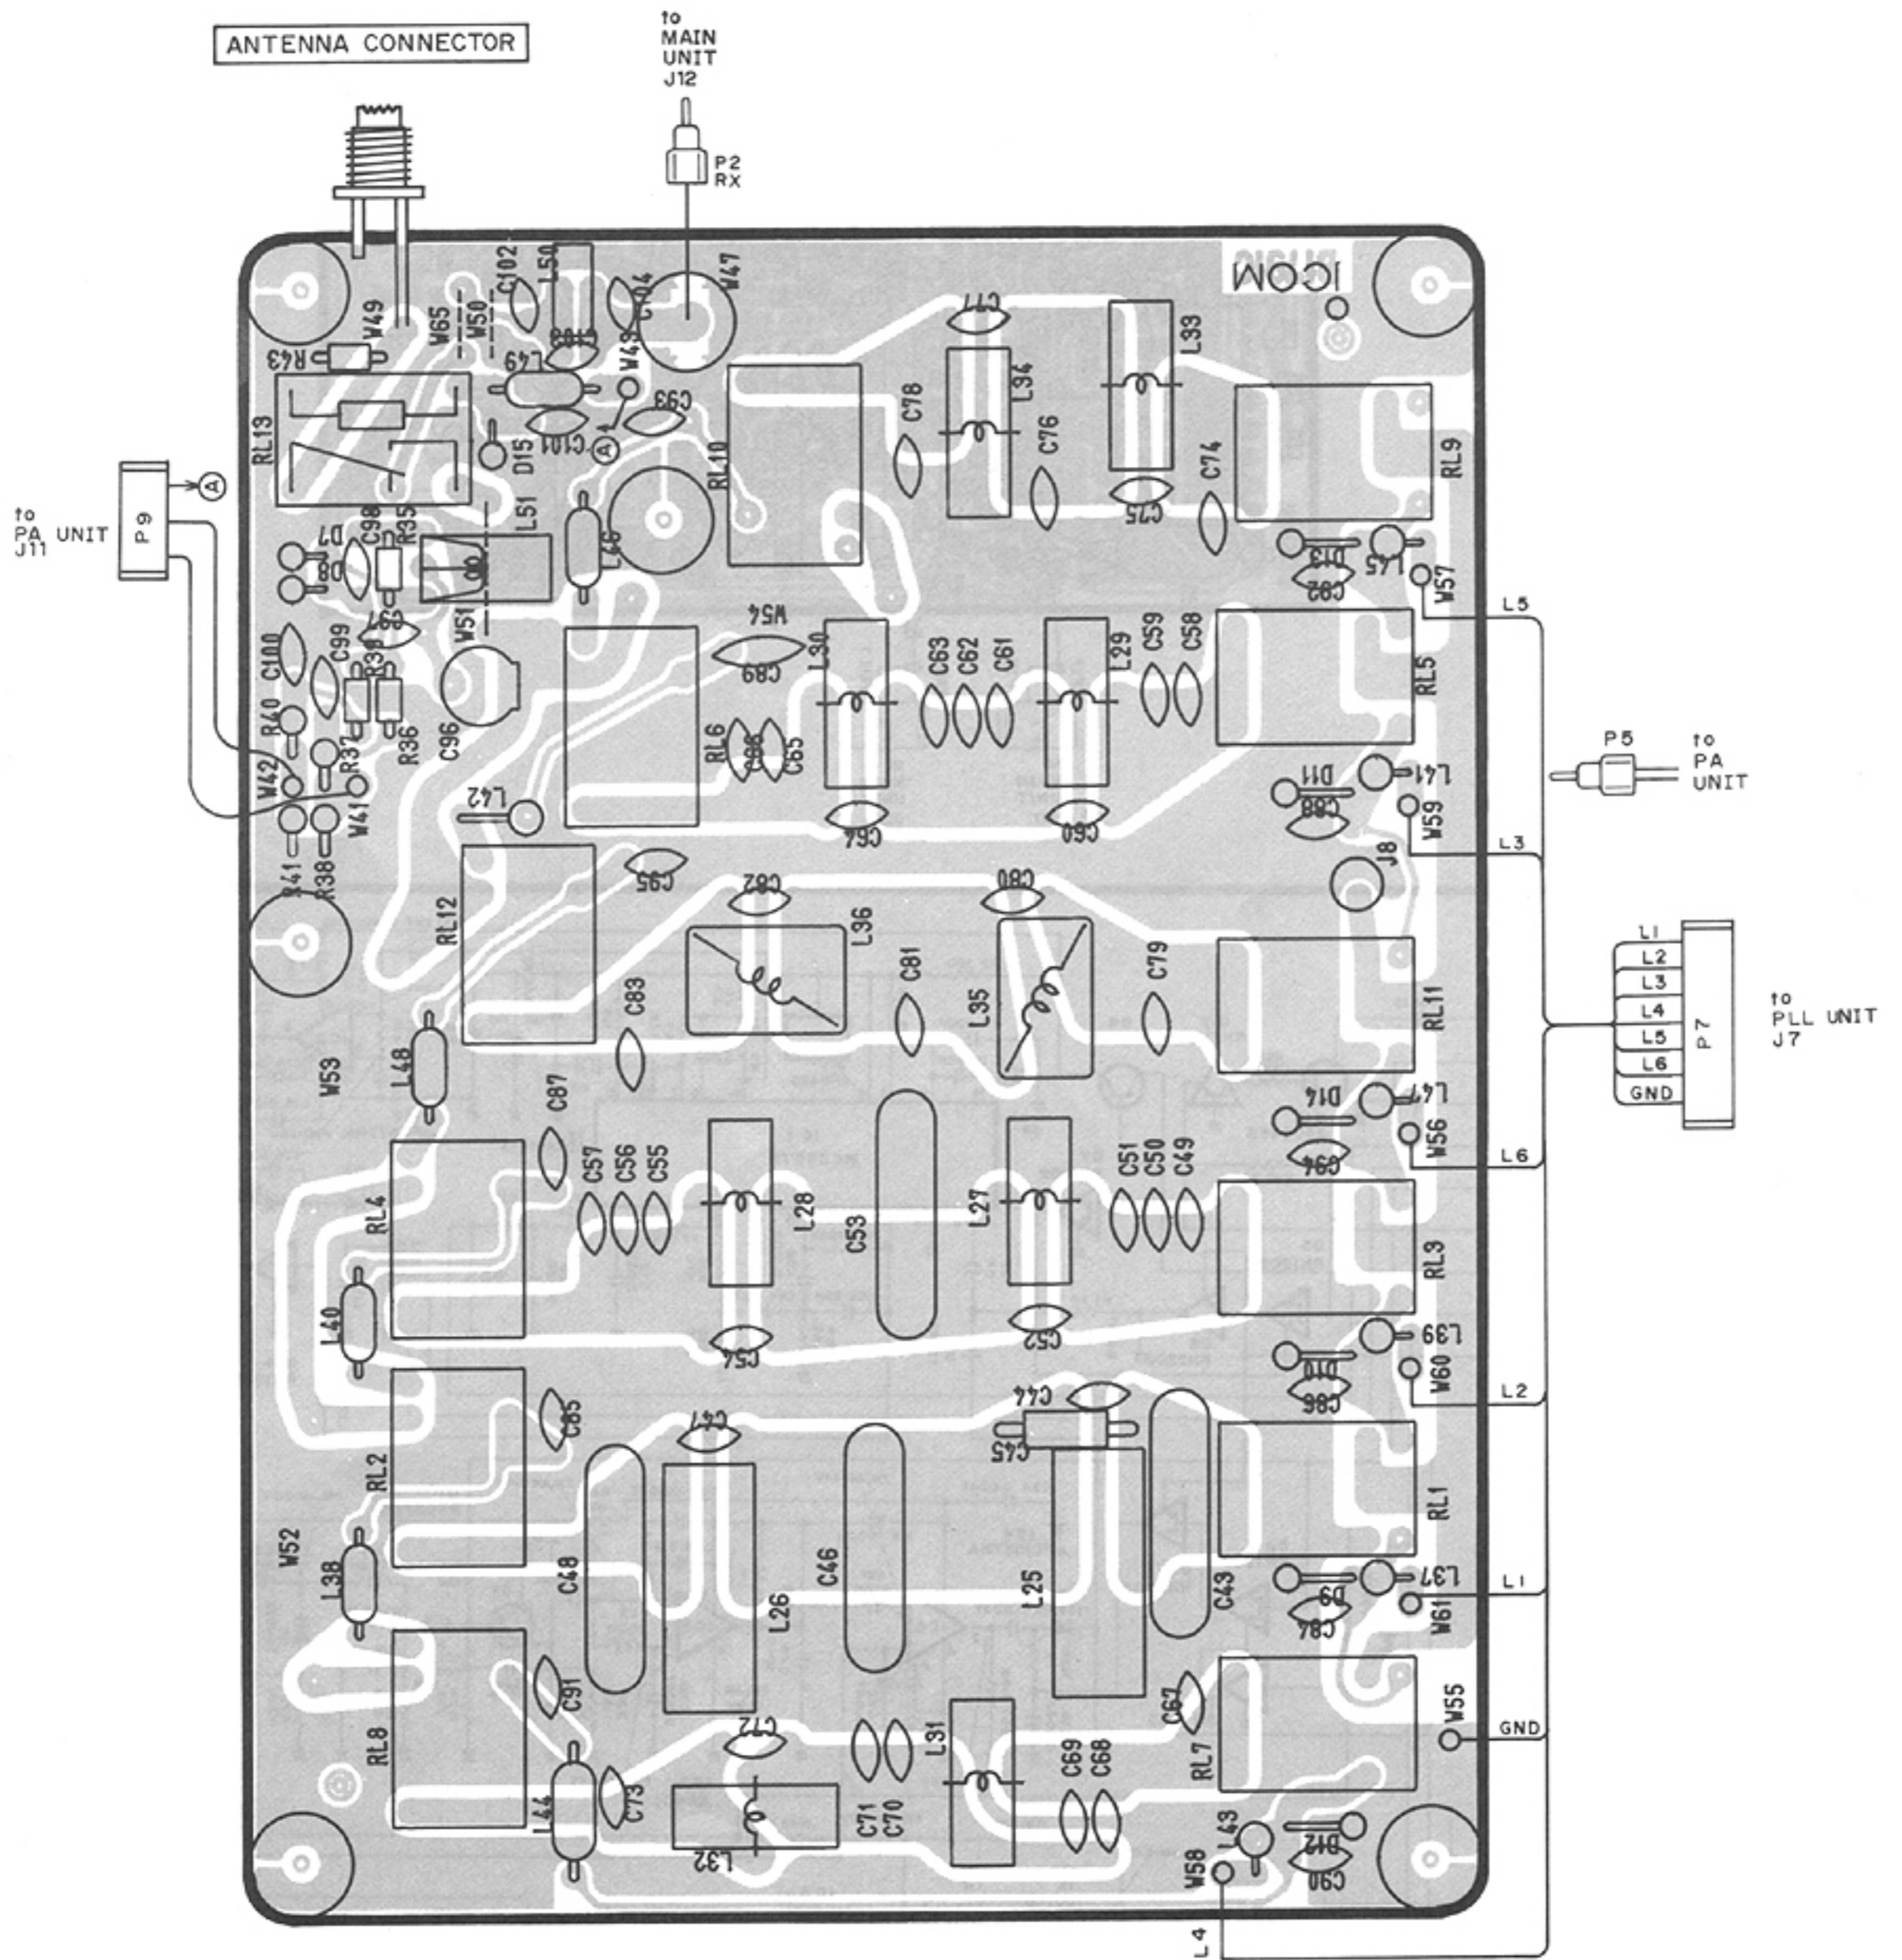


• PA UNIT

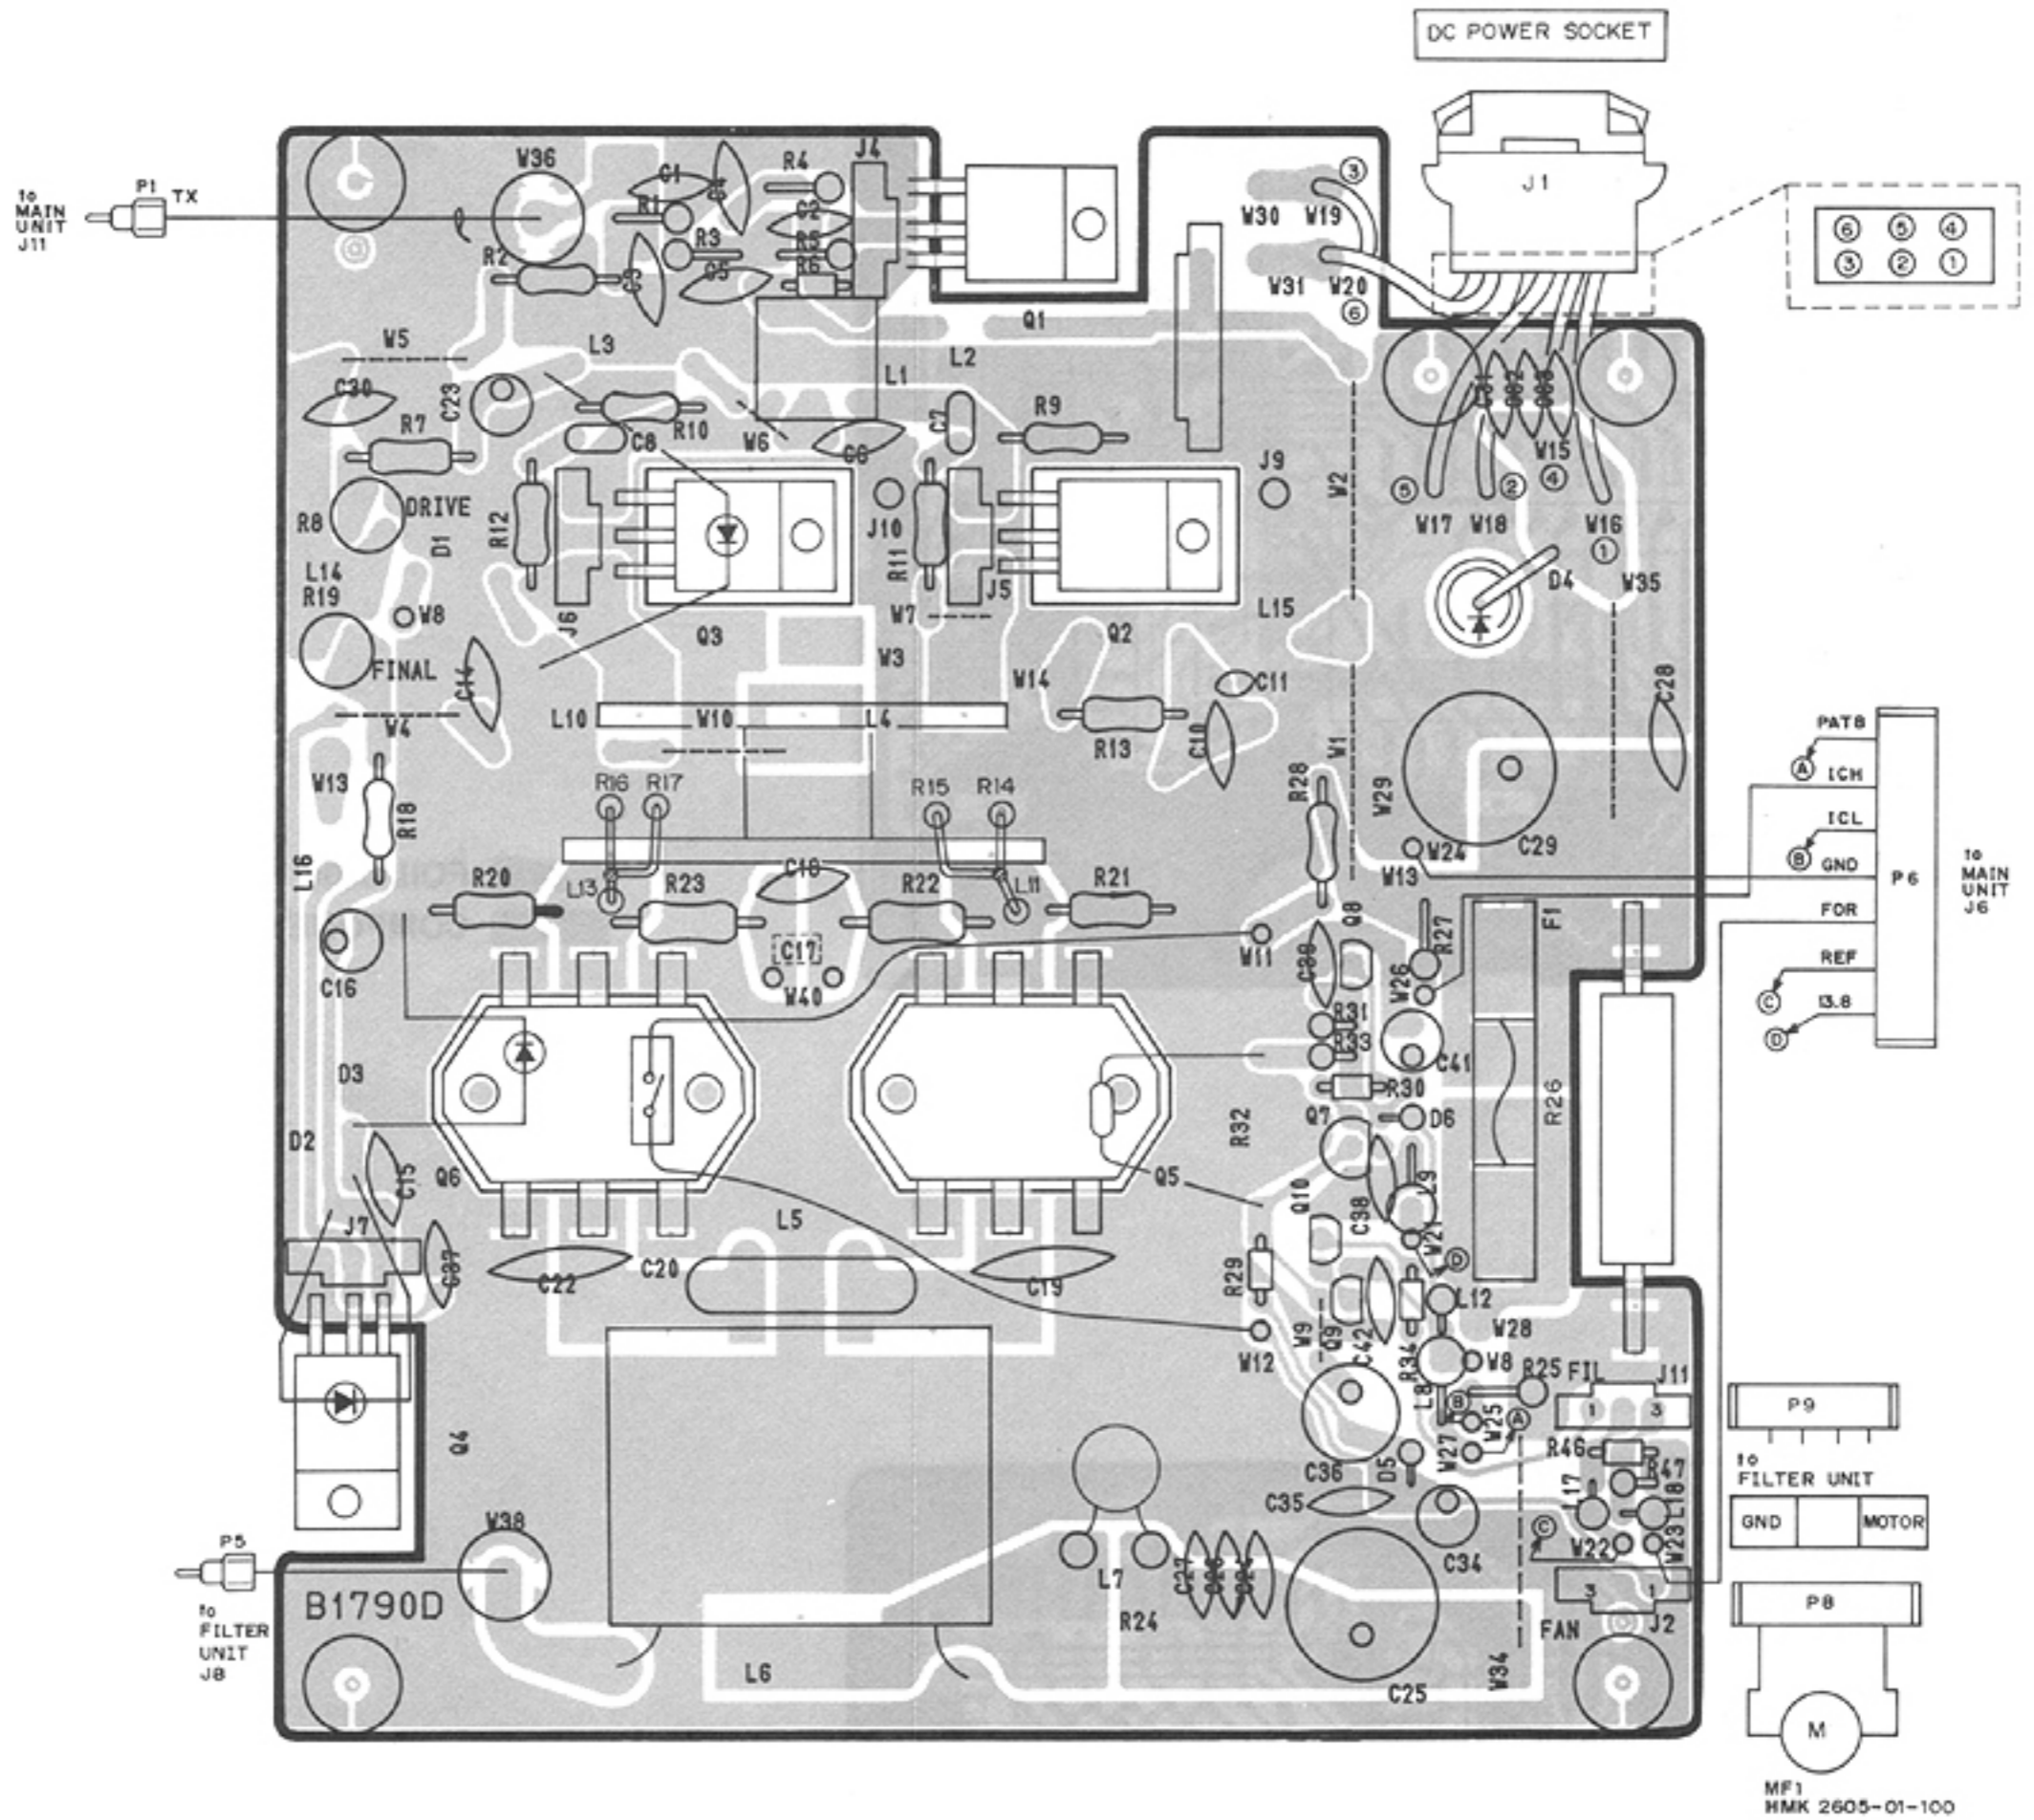


**2SB562 C**  
Q7

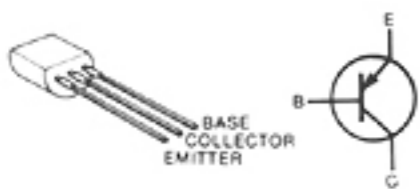


**2SC1971**  
Q1

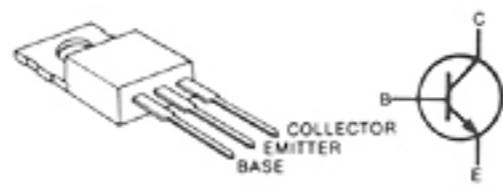


**2SC2904**  
Q5, Q6

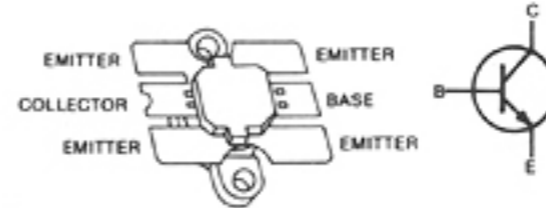


**2SC3133**  
Q2, Q3

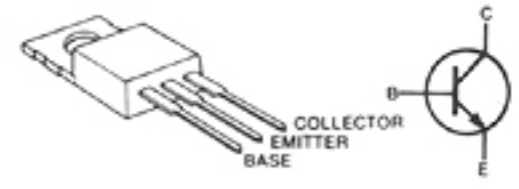


**2SD1406 Y**  
Q4

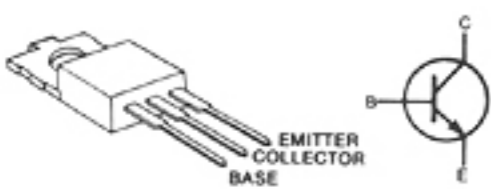

**RN1202**  
Q8, Q9

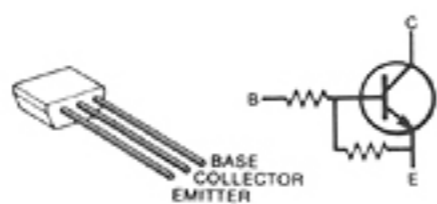


**RN2202**  
Q10

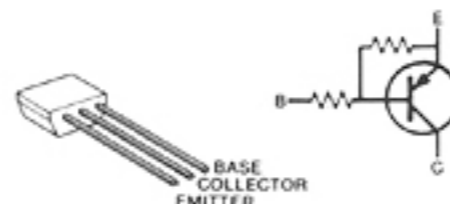


# 7-5 DDS UNIT

## COMPONENT SIDE

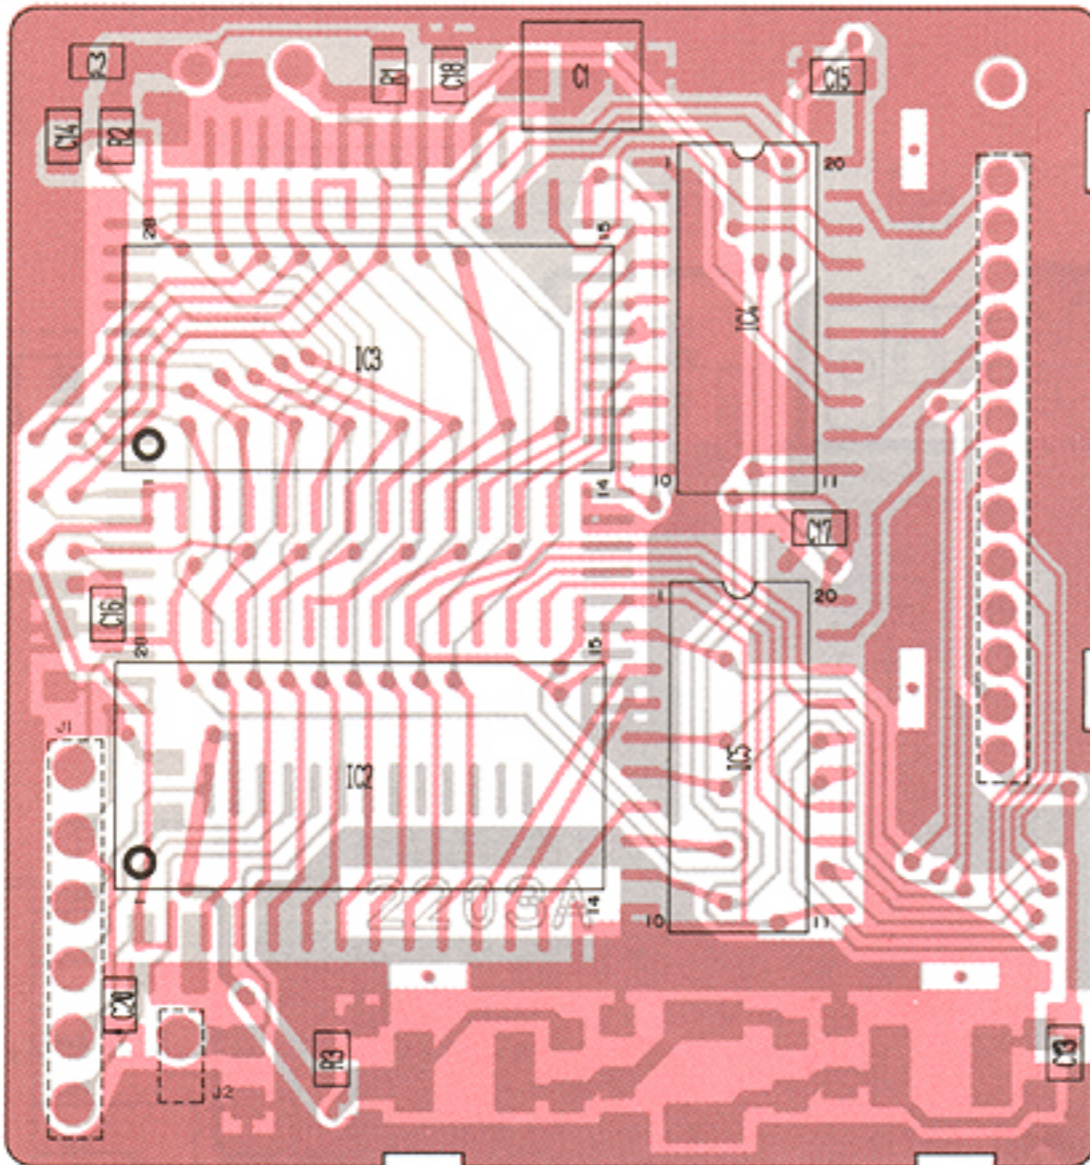

FOIL SIDE  
 COMPONENT SIDE

## FOIL SIDE


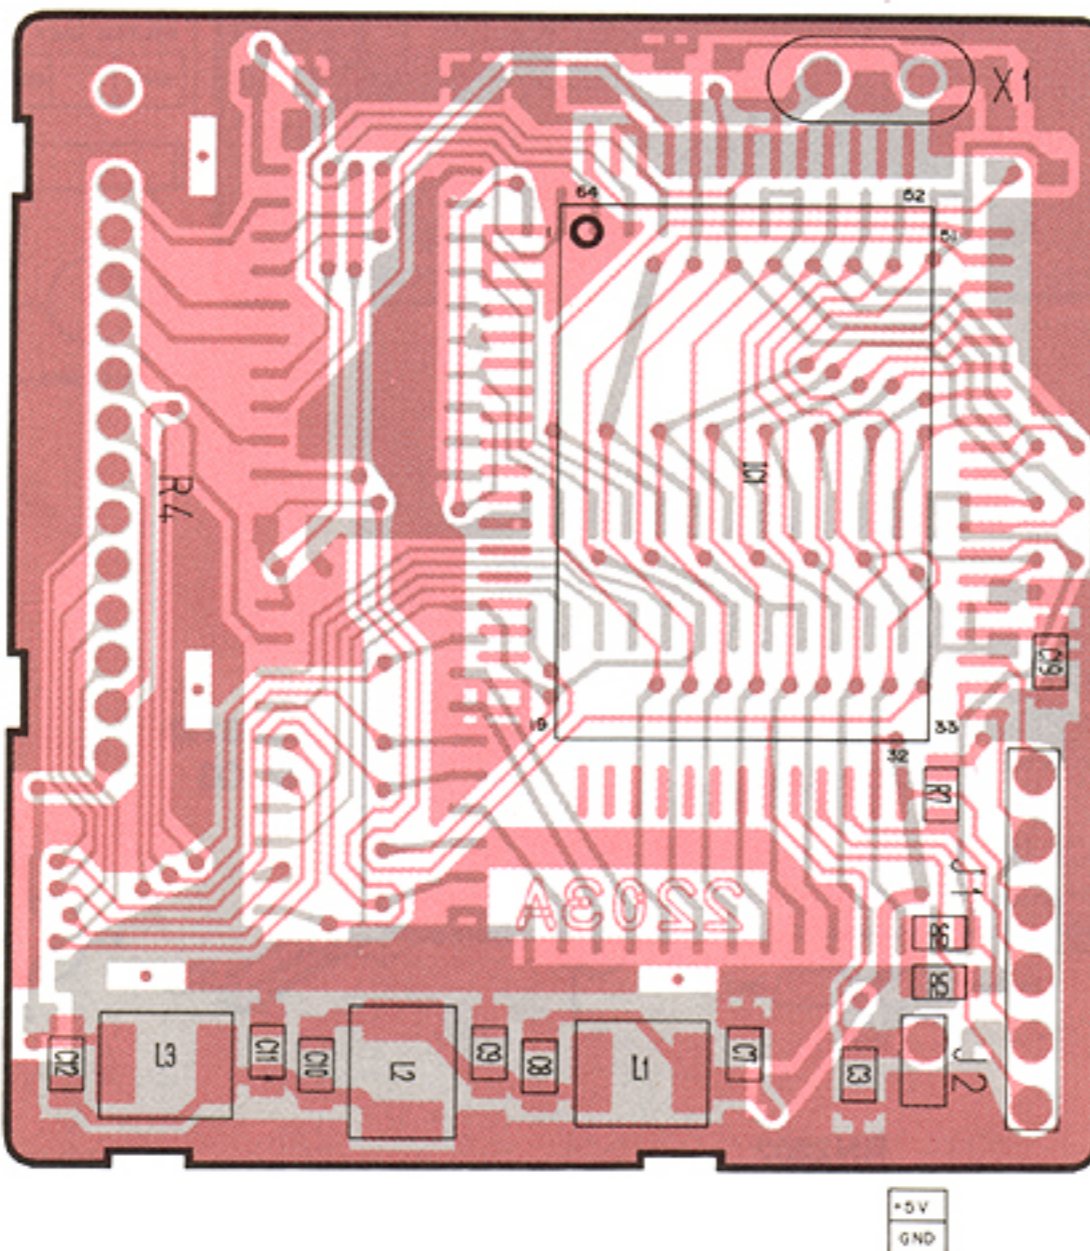


J1  
 LO  
 PO  
 P1  
 DATA  
 CK  
 ENA1

FOIL SIDE  
 COMPONENT SIDE



# 7-6 AM • FM UNIT (OPTIONAL)

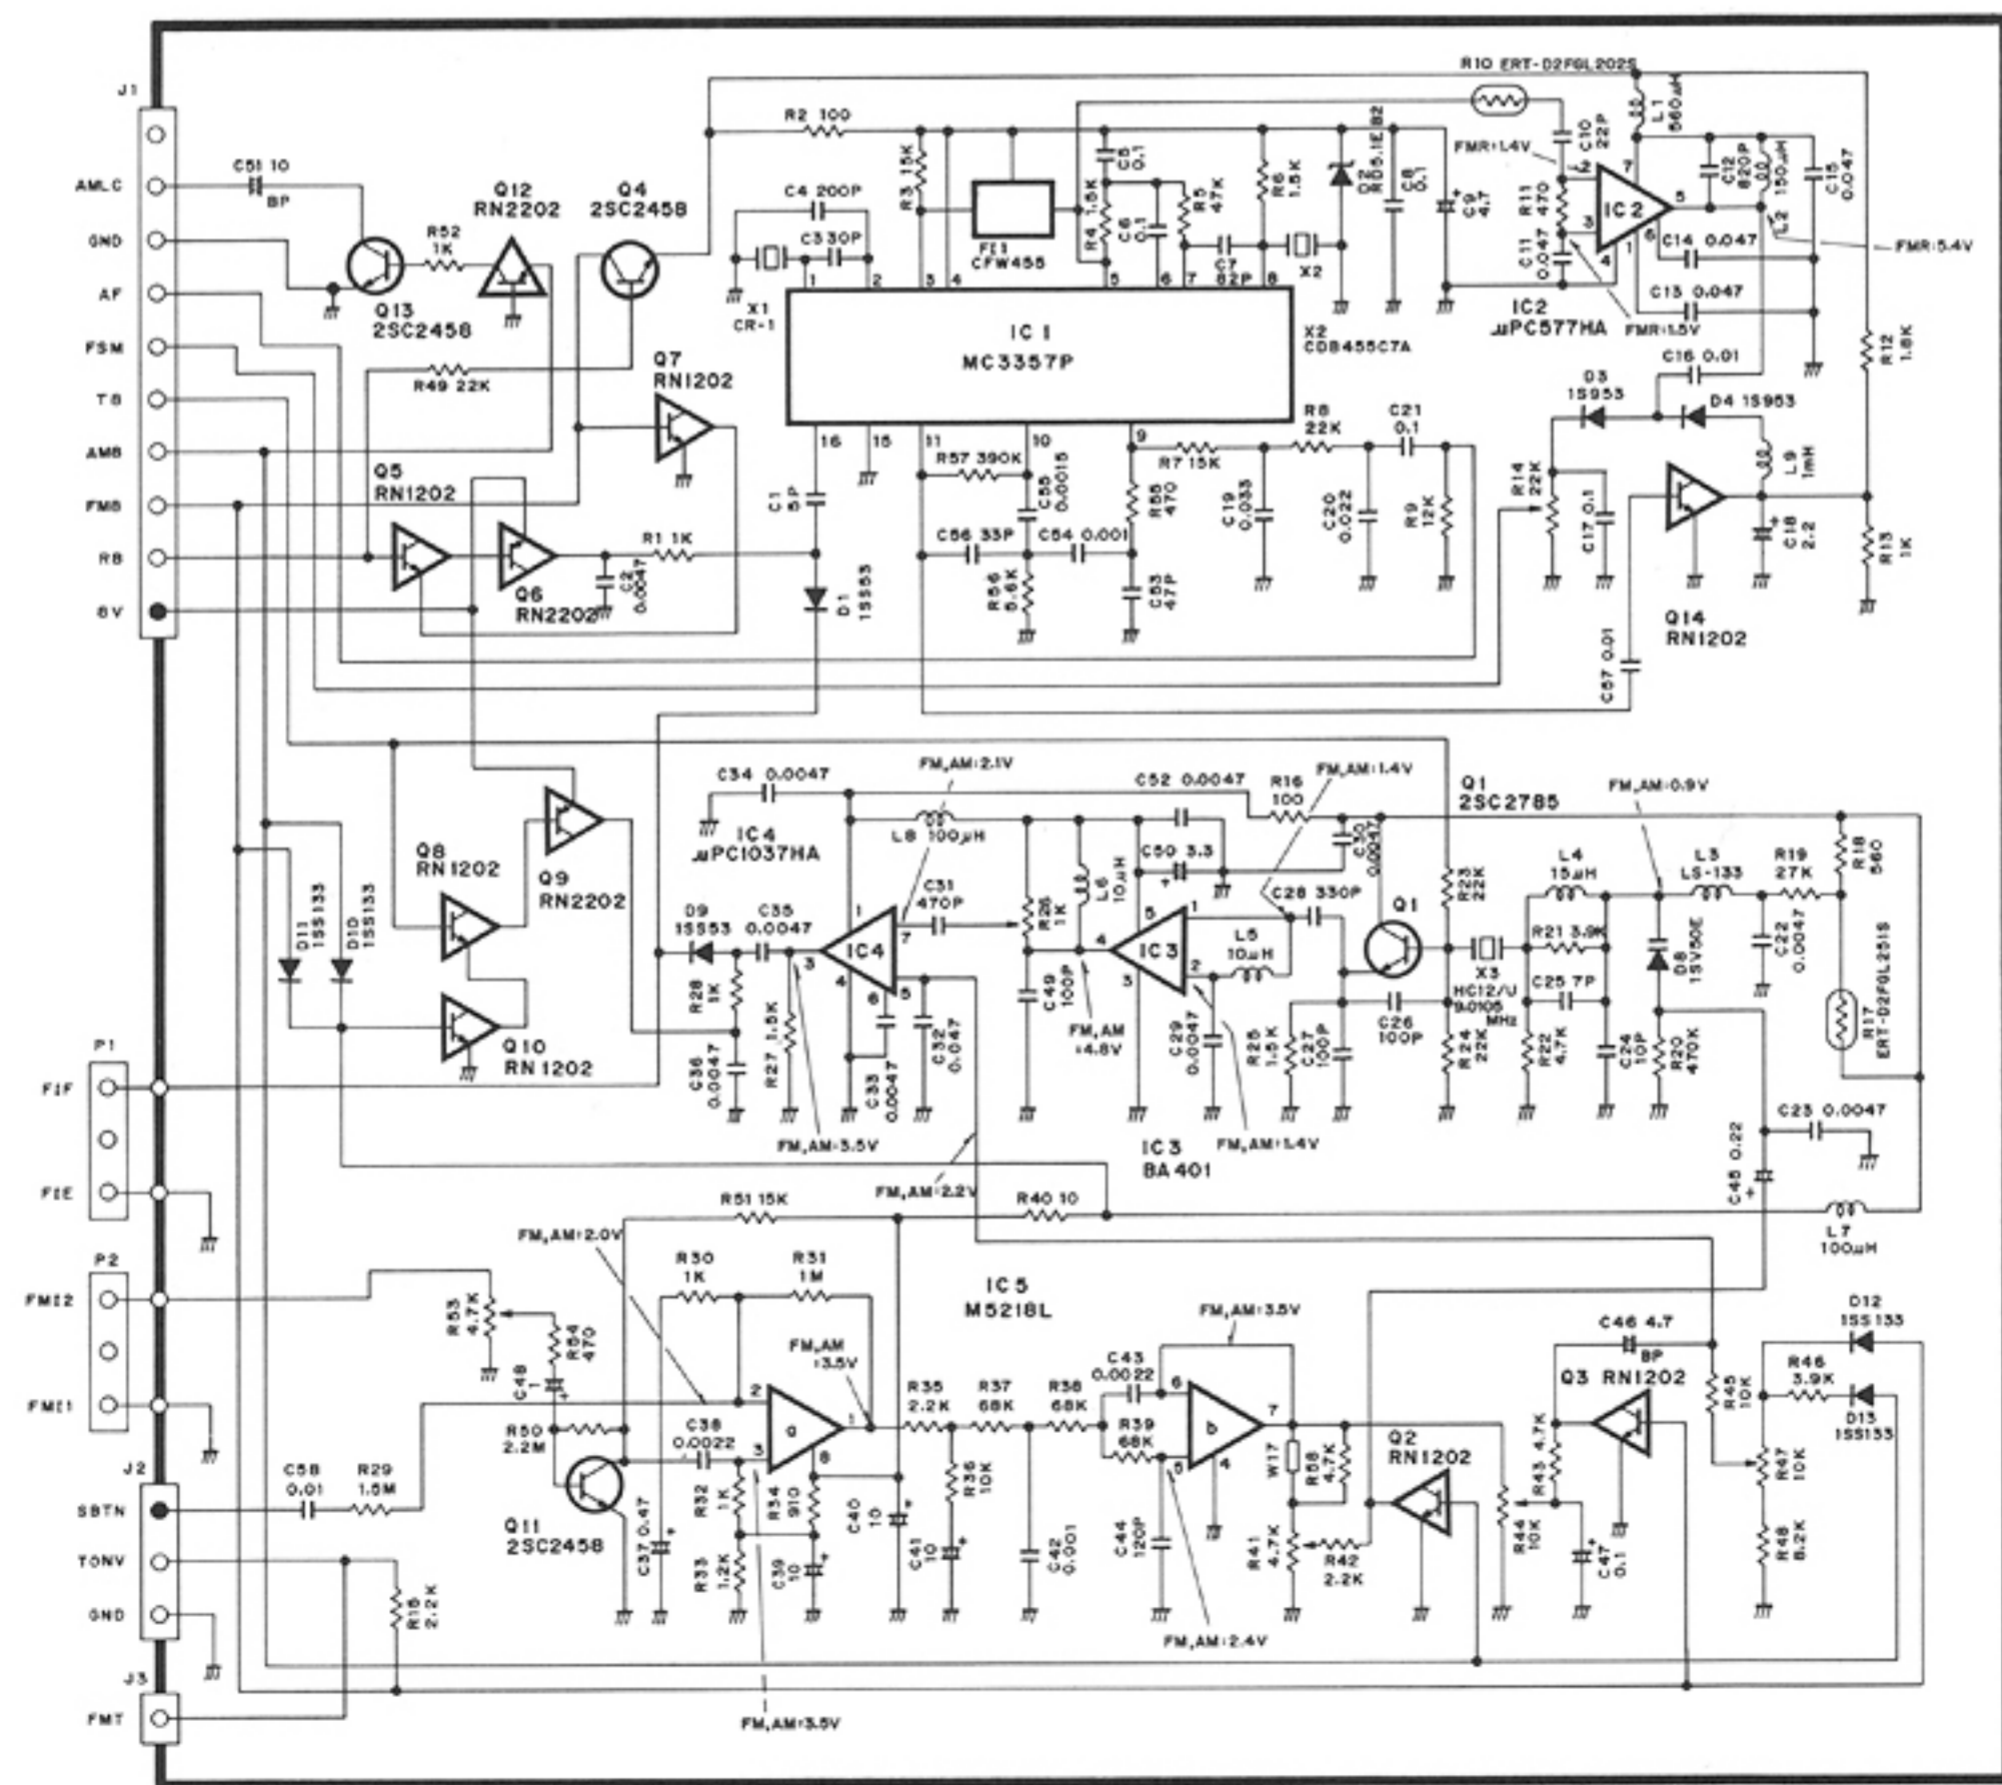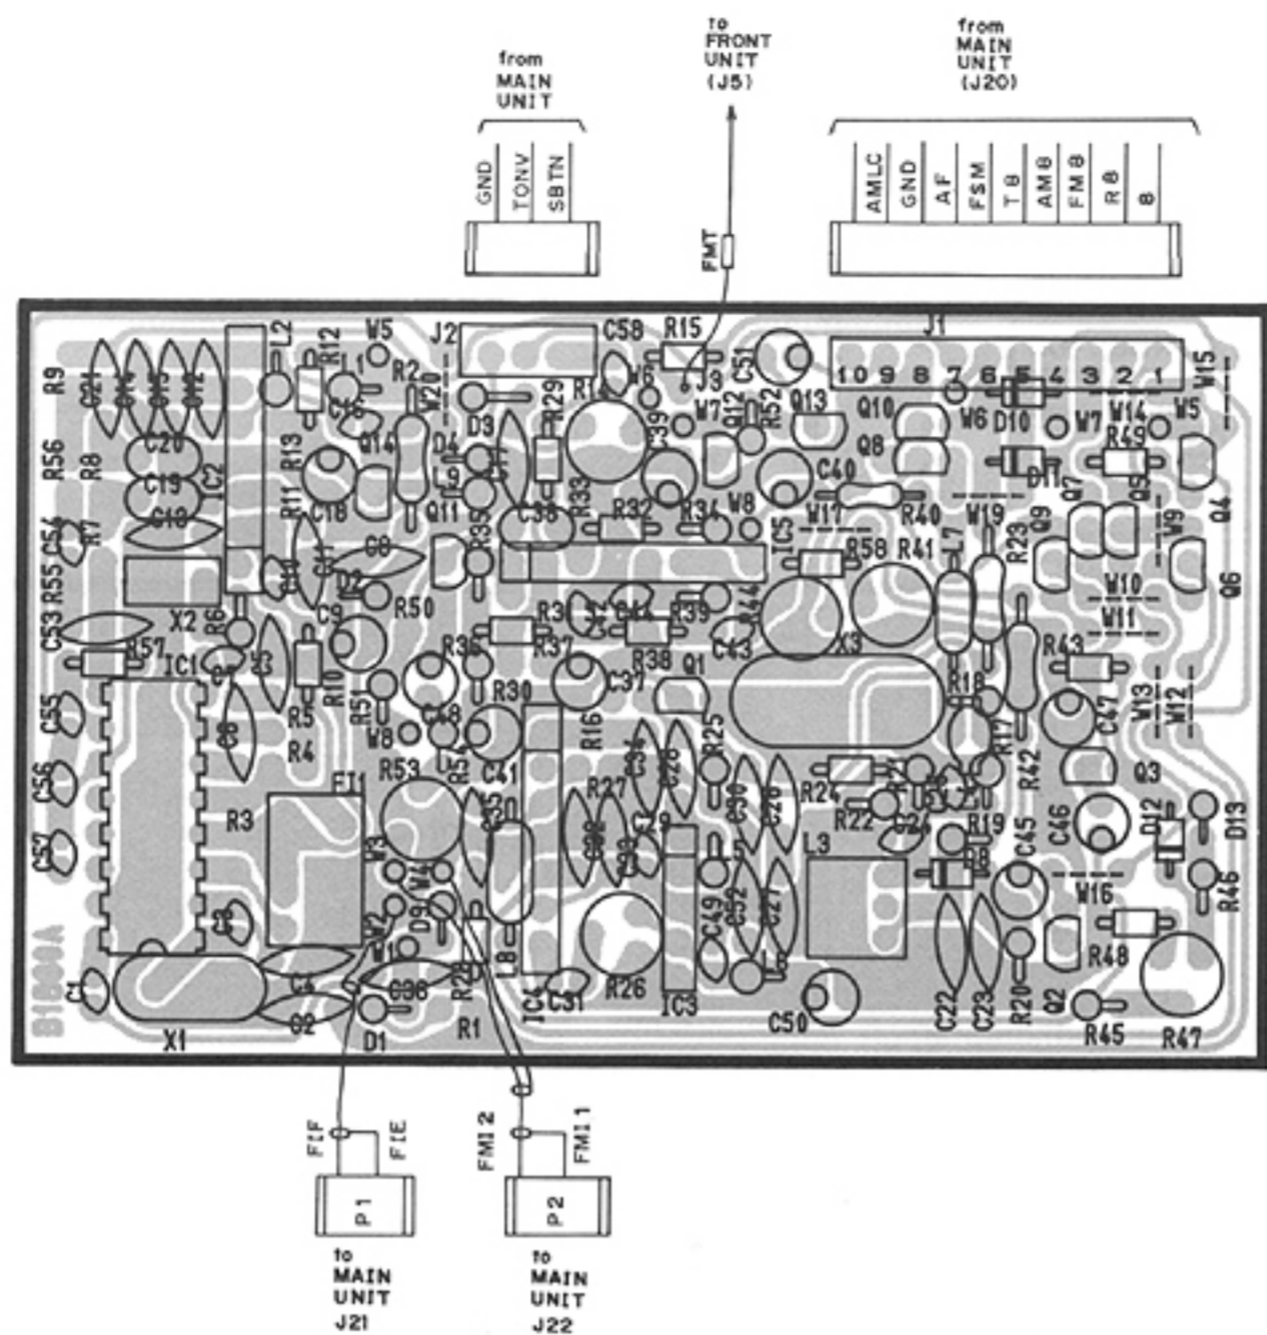

# SECTION 8 PARTS LIST

## [FRONT UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION       |   |
|----------|------------|-------------------|---|
| IC1      | 1130000790 | IC                | μPD7225G                                |
| Q1       | 1520000230 | Transistor        | 2SB909M Q                               |
| Q2       | 1530000110 | Transistor        | 2SC2458-GR                              |
| Q3       | 1530000110 | Transistor        | 2SC2458-GR                              |
| Q4       | 1530000110 | Transistor        | 2SC2458-GR                              |
| Q5       | 1590000350 | Transistor        | RN1204                                  |
| Q6       | 1530000110 | Transistor        | 2SC2458-GR                              |
| D1       | 1730000180 | Zener             | RD8.2E B2                               |
| D2       | 1710000160 | Diode             | 1SS133                                  |
| D3       | 1710000160 | Diode             | 1SS133                                  |
| D4       | 1710000160 | Diode             | 1SS133                                  |
| D5       | 1710000160 | Diode             | 1SS133                                  |
| D6       | 1710000160 | Diode             | 1SS133                                  |
| D7       | 1710000160 | Diode             | 1SS133                                  |
| D8       | 1710000160 | Diode             | 1SS133                                  |
| D9       | 1710000160 | Diode             | 1SS133                                  |
| D10      | 1710000160 | Diode             | 1SS133                                  |
| D11      | 1710000160 | Diode             | 1SS133                                  |
| D12      | 1710000160 | Diode             | 1SS133                                  |
| D13      | 1710000160 | Diode             | 1SS133                                  |
| D14      | 1710000160 | Diode             | 1SS133                                  |
| D15      | 1710000160 | Diode             | 1SS133                                  |
| D16      | 1710000160 | Diode             | 1SS133                                  |
| D17      | 1710000160 | Diode             | 1SS133                                  |
| D18      | 1710000160 | Diode             | 1SS133                                  |
| D19      | 1710000160 | Diode             | 1SS133                                  |
| L1       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L2       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L3       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L4       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L5       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L6       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L7       | 6180000900 | Coil              | LAL 03NA 101K                           |
| L8       | 6180000900 | Coil              | LAL 03NA 101K                           |
| R1       | 7210001320 | Variable Resistor | RK124221002DA (AF/SQL)                  |
| R2       | 7210001550 | Variable Resistor | RK1242210032A<br>10KB•10KB (MIC/RF PWR) |
| R3       | 7010004030 | Resistor          | R20J 47 Ω                               |
| R4       | 7010004190 | Resistor          | R20J 1 kΩ                               |
| R5       | 7010003280 | Resistor          | ELR20J 100 Ω                            |
| R6       | 7010003280 | Resistor          | ELR20J 100 Ω                            |
| R7       | 7010004720 | Resistor          | R50XJ 100 Ω                             |
| R8       | 7010004720 | Resistor          | R50XJ 100 Ω                             |
| R9       | 7010003400 | Resistor          | ELR20J 1 kΩ                             |
| R10      | 7010003520 | Resistor          | ELR20J 8.2 kΩ                           |
| R11      | 7010003480 | Resistor          | ELR20J 4.7 kΩ                           |
| R12      | 7010003400 | Resistor          | ELR20J 1 kΩ                             |
| R13      | 7010004250 | Resistor          | R20J 3.3 kΩ                             |
| R14      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R15      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R16      | 7010004480 | Resistor          | R20J 180 kΩ                             |
| R17      | 7010004410 | Resistor          | R20J 47 kΩ                              |
| R18      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R19      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R20      | 7010004170 | Resistor          | R20J 680 Ω                              |
| R21      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R22      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R23      | 7210000570 | Variable Resistor | RK1631110D5FA (RIT)                     |
| R24      | 7010004320 | Resistor          | R20J 10 kΩ                              |
| R25      | 7010001400 | Resistor          | R25J 100 kΩ                             |
| R26      | 7010004450 | Resistor          | R20J 100 kΩ                             |

## [FRONT UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION    |                           |
|----------|------------|----------------|---------------------------|
| C1       | 4510000970 | Electrolytic   | 10 MS9 100 μF             |
| C2       | 4510001150 | Electrolytic   | 50 MS7 R47 μF             |
| C3       | 4010000520 | Ceramic        | DD108 B 472K 50V          |
| C4       | 4010000520 | Ceramic        | DD108 B 472K 50V          |
| C5       | 4040000260 | Barrier Layer  | UZE 08X 104M              |
| C6       | 4010000520 | Ceramic        | DD108 B 472K 50V          |
| C7       | 4010000520 | Ceramic        | DD108 B 472K 50V          |
| C8       | 4020000250 | Cylinder       | UP125 X 472M              |
| C9       | 4020000250 | Cylinder       | UP125 X 472M              |
| C10      | 4010000520 | Ceramic        | DD108 B 472K 50V          |
| DS1      | 5030000380 | LCD            | HLC9599-01-3210           |
| DS2      | 5040001290 | LED            | SLP153B                   |
| DS3      | 5040001300 | LED            | SLP253B                   |
| DS4      | 5080000170 | LED            | HRS7219A-Y2-30            |
| DS5      | 5080000170 | LED            | HRS7219A-Y2-30            |
| DS7      | 5080000170 | LED            | HRS7219A-Y2-30            |
| ME1      | 5510000300 | Meter          | KL-218U-43 (M610)         |
| S1       | 2230000120 | Switch         | SDDSA3159A [POWER]        |
| S2       | 2230000550 | Switch         | SPPH23079A [ATT]          |
| S3       | 2230000550 | Switch         | SPPH23079A [PRE]          |
| S4       | 2230000550 | Switch         | SPPH23079A [NB]           |
| S5       | 2230000550 | Switch         | SPPH23079A [AGC]          |
| S6       | 2230000550 | Switch         | SPPH23079A [LOCK]         |
| S7       | 2230000550 | Switch         | SPPH23079A [TRANSMIT]     |
| S8       | 2260000070 | Switch         | SKHHAK013A [M-CH UP]      |
| S9       | 2260000070 | Switch         | SKHHAK013A<br>[M-CH DOWN] |
| S10      | 2260000070 | Switch         | SKHHAK013A [VFO]          |
| S11      | 2260000070 | Switch         | SKHHAK013A [MEMO]         |
| S12      | 2260000070 | Switch         | SKHHAK013A [RIT]          |
| S13      | 2260000070 | Switch         | SKHHAK013A [MW]           |
| S14      | 2260000070 | Switch         | SKHHAK013A [FUNC]         |
| S15      | 2260000070 | Switch         | SKHHAK013A [SPLIT]        |
| S16      | 2260000070 | Switch         | SKHHAK013A [TUNER]        |
| S17      | 2260000060 | Switch         | SKHHAJ025A [BAND]         |
| S18      | 2260000060 | Switch         | SKHHAJ025A [MHz]          |
| S19      | 2260000060 | Switch         | SKHHAJ025A [kHz]          |
| S20      | 2260000070 | Switch         | SKHHAK013A [AM/FM]        |
| S21      | 2260000070 | Switch         | SKHHAK013A [CW/N]         |
| S22      | 2260000070 | Switch         | SKHHAK013A [SSB]          |
| S23      | 7600000100 | Switch         | EC24B50B0013A [MAIN]      |
| EP1      | 0910019544 | P.C. Board     | B 1786D (SW)              |
| EP2      | 0910019524 | P.C. Board     | B 1787D (VR)              |
| EP3      | 0910019550 | P.C. Board     | B 1868 (SPEC)             |
| EP4      | 0910006330 | Flexible Cable | B 792                     |
| EP5      | 0910019931 | P.C. Board     | B 1932A (LED)             |
| EP9      | 6910000630 | Ferrite Bead   | FSOH070RN                 |
| EP10     | 6910000630 | Ferrite Bead   | FSOH070RN                 |
| EP11     | 6910000630 | Ferrite Bead   | FSOH070RN                 |

## [MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |            |
|----------|------------|-------------|------------|
| IC1      | 1790000050 | IC          | ND487C1-3R |
| IC2      | 1110001310 | IC          | μPC577HA   |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |            |
|----------|------------|-------------|------------|
| IC4      | 1110000330 | IC          | M5218L     |
| IC5      | 1110001320 | IC          | μPC1037HA  |
| IC6      | 1110001320 | IC          | μPC1037HA  |
| IC8      | 1130003900 | IC          | GD4066B    |
| IC9      | 1110000890 | IC          | μPC1241H   |
| IC10     | 1110000330 | IC          | M5218L     |
| IC11     | 1110000330 | IC          | M5218L     |
| IC13     | 1130003880 | IC          | GD4011B    |
| IC14     | 1180000470 | IC          | NJM7808A   |
| IC15     | 1110000290 | IC          | BA618      |
| IC16     | 1120000970 | IC          | M54562P    |
| Q1       | 1530000810 | Transistor  | 2SC2053    |
| Q2       | 1580000100 | FET         | 3SK74 K    |
| Q3       | 1580000100 | FET         | 3SK74 K    |
| Q4       | 1530000810 | Transistor  | 2SC2053    |
| Q5       | 1520000230 | Transistor  | 2SB909M Q  |
| Q6       | 1590000340 | Transistor  | RN1202     |
| Q7       | 1560000100 | FET         | 2SK241-Y   |
| Q8       | 1560000130 | FET         | 2SK125     |
| Q9       | 1560000130 | FET         | 2SK125     |
| Q10      | 1590000360 | Transistor  | RN2202     |
| Q11      | 1530000110 | Transistor  | 2SC2458-GR |
| Q12      | 1590000340 | Transistor  | RN1202     |
| Q13      | 1560000130 | FET         | 2SK125     |
| Q14      | 1560000130 | FET         | 2SK125     |
| Q15      | 1580000110 | FET         | 3SK74 M    |
| Q16      | 1560000080 | FET         | 2SK192A-Y  |
| Q17      | 1510000080 | Transistor  | 2SA1048-GR |
| Q18      | 1530000110 | Transistor  | 2SC2458-GR |
| Q19      | 1530000110 | Transistor  | 2SC2458-GR |
| Q20      | 1590000360 | Transistor  | RN2202     |
| Q21      | 1580000110 | FET         | 3SK74 M    |
| Q22      | 1560000100 | FET         | 2SK241-Y   |
| Q23      | 1590000340 | Transistor  | RN1202     |
| Q24      | 1590000360 | Transistor  | RN2202     |
| Q25      | 1590000360 | Transistor  | RN2202     |
| Q26      | 1530000110 | Transistor  | 2SC2458-GR |
| Q27      | 1580000110 | FET         | 3SK74 M    |
| Q28      | 1560000100 | FET         | 2SK241-Y   |
| Q29      | 1530000110 | Transistor  | 2SC2458-GR |
| Q30      | 1530000110 | Transistor  | 2SC2458-GR |
| Q31      | 1530000110 | Transistor  | 2SC2458-GR |
| Q32      | 1590000340 | Transistor  | RN1202     |
| Q33      | 1590000350 | Transistor  | RN1204     |
| Q34      | 1590000340 | Transistor  | RN1202     |
| Q35      | 1530000110 | Transistor  | 2SC2458-GR |
| Q36      | 1530000110 | Transistor  | 2SC2458-GR |
| Q37      | 1530000110 | Transistor  | 2SC2458-GR |
| Q38      | 1510000080 | Transistor  | 2SA1048-GR |
| Q39      | 1590000350 | Transistor  | RN1204     |
| Q40      | 1530000110 | Transistor  | 2SC2458-GR |
| Q41      | 1590000360 | Transistor  | RN2202     |
| Q42      | 1530000110 | Transistor  | 2SC2458-GR |
| Q44      | 1530000110 | Transistor  | 2SC2458-GR |
| Q45      | 1530000110 | Transistor  | 2SC2458-GR |
| Q46      | 1540000070 | Transistor  | 2SD468C    |
| Q47      | 1540000070 | Transistor  | 2SD468C    |
| Q48      | 1540000070 | Transistor  | 2SD468C    |
| Q49      | 1530000110 | Transistor  | 2SC2458-GR |
| Q50      | 1530000110 | Transistor  | 2SC2458-GR |
| Q51      | 1590000340 | Transistor  | RN1202     |
| Q52      | 1540000150 | Transistor  | 2SD1225M R |
| Q53      | 1510000080 | Transistor  | 2SA1048-GR |
| Q54      | 1590000350 | Transistor  | RN1204     |
| Q55      | 1590000350 | Transistor  | RN1204     |
| Q56      | 1530000110 | Transistor  | 2SC2458-GR |
| D1       | 1710000050 | Diode       | 1SS53      |
| D2       | 1710000050 | Diode       | 1SS53      |
| D3       | 1710000050 | Diode       | 1SS53      |
| D4       | 1710000050 | Diode       | 1SS53      |
| D5       | 1710000050 | Diode       | 1SS53      |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |           |
|----------|------------|-------------|-----------|
| D6       | 1710000050 | Diode       | 1SS53     |
| D7       | 1710000050 | Diode       | 1SS53     |
| D8       | 1710000050 | Diode       | 1SS53     |
| D9       | 1710000050 | Diode       | 1SS53     |
| D10      | 1710000160 | Diode       | 1SS133    |
| D11      | 1710000160 | Diode       | 1SS133    |
| D12      | 1710000330 | Diode       | 1K60      |
| D13      | 1710000330 | Diode       | 1K60      |
| D14      | 1710000160 | Diode       | 1SS133    |
| D15      | 1710000050 | Diode       | 1SS53     |
| D16      | 1710000050 | Diode       | 1SS53     |
| D17      | 1710000160 | Diode       | 1SS133    |
| D18      | 1710000050 | Diode       | 1SS53     |
| D19      | 1710000050 | Diode       | 1SS53     |
| D20      | 1710000050 | Diode       | 1SS53     |
| D21      | 1710000050 | Diode       | 1SS53     |
| D22      | 1710000160 | Diode       | 1SS133    |
| D23      | 1710000050 | Diode       | 1SS53     |
| D24      | 1710000050 | Diode       | 1SS53     |
| D25      | 1710000050 | Diode       | 1SS53     |
| D26      | 1710000050 | Diode       | 1SS53     |
| D27      | 1710000160 | Diode       | 1SS133    |
| D28      | 1710000050 | Diode       | 1SS53     |
| D29      | 1710000050 | Diode       | 1SS53     |
| D30      | 1710000050 | Diode       | 1SS53     |
| D31      | 1710000050 | Diode       | 1SS53     |
| D32      | 1710000050 | Diode       | 1SS53     |
| D33      | 1710000050 | Diode       | 1SS53     |
| D34      | 1710000160 | Diode       | 1SS133    |
| D35      | 1710000050 | Diode       | 1SS53     |
| D36      | 1710000050 | Diode       | 1SS53     |
| D37      | 1710000050 | Diode       | 1SS53     |
| D38      | 1710000050 | Diode       | 1SS53     |
| D39      | 1710000050 | Diode       | 1SS53     |
| D40      | 1710000050 | Diode       | 1SS53     |
| D41      | 1710000050 | Diode       | 1SS53     |
| D42      | 1710000050 | Diode       | 1SS53     |
| D43      | 1710000050 | Diode       | 1SS53     |
| D44      | 1710000050 | Diode       | 1SS53     |
| D45      | 1710000050 | Diode       | 1SS53     |
| D46      | 1710000050 | Diode       | 1SS53     |
| D47      | 1710000050 | Diode       | 1SS53     |
| D48      | 1710000050 | Diode       | 1SS53     |
| D49      | 1710000050 | Diode       | 1SS53     |
| D50      | 1710000050 | Diode       | 1SS53     |
| D51      | 1710000050 | Diode       | 1SS53     |
| D52      | 1710000050 | Diode       | 1SS53     |
| D55      | 1710000160 | Diode       | 1SS133    |
| D56      | 1710000330 | Diode       | 1K60      |
| D57      | 1710000160 | Diode       | 1SS133    |
| D58      | 1710000160 | Diode       | 1SS133    |
| D59      | 1710000330 | Diode       | 1K60      |
| D60      | 1710000330 | Diode       | 1K60      |
| D61      | 1710000160 | Diode       | 1SS133    |
| D62      | 1710000330 | Diode       | 1K60      |
| D63      | 1710000050 | Diode       | 1SS53     |
| D64      | 1710000160 | Diode       | 1SS133    |
| D65      | 1710000160 | Diode       | 1SS133    |
| D66      | 1710000160 | Diode       | 1SS133    |
| D67      | 1710000050 | Diode       | 1SS53     |
| D68      | 1710000050 | Diode       | 1SS53     |
| D69      | 1710000050 | Diode       | 1SS53     |
| D70      | 1710000050 | Diode       | 1SS53     |
| D71      | 1710000050 | Diode       | 1SS53     |
| D72      | 1710000160 | Diode       | 1SS133    |
| D73      | 1710000160 | Diode       | 1SS133    |
| D75      | 1710000160 | Diode       | 1SS133    |
| D76      | 1710000160 | Diode       | 1SS133    |
| D77      | 1710000160 | Diode       | 1SS133    |
| D78      | 1710000160 | Diode       | 1SS133    |
| D79      | 1710000160 | Diode       | 1SS133    |
| D80      | 1730000070 | Zener       | RD3.9E B2 |
| D81      | 1710000160 | Diode       | 1SS133    |
| D82      | 1710000160 | Diode       | 1SS133    |
| D83      | 1710000160 | Diode       | 1SS133    |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                |
|----------|------------|-------------|----------------|
| D84      | 1710000160 | Diode       | 1SS133         |
| D85      | 1710000160 | Diode       | 1SS133         |
| D86      | 1710000160 | Diode       | 1SS133         |
| D87      | 1710000160 | Diode       | 1SS133         |
| D88      | 1710000160 | Diode       | 1SS133         |
| D89      | 1710000160 | Diode       | 1SS133         |
| D90      | 1710000160 | Diode       | 1SS133         |
| D91      | 1710000160 | Diode       | 1SS133         |
| D92      | 1710000160 | Diode       | 1SS133         |
| D93      | 1710000160 | Diode       | 1SS133         |
| D94      | 1710000160 | Diode       | 1SS133         |
| D95      | 1710000160 | Diode       | 1SS133         |
| D96      | 1710000160 | Diode       | 1SS133         |
| D97      | 1710000030 | Diode       | 1S1555         |
| D98      | 1710000160 | Diode       | 1SS133         |
| D99      | 1710000160 | Diode       | 1SS133         |
| F11      | 2010000240 | Filter      | 70M15A (FL-71) |
| F12      | 2010000270 | Filter      | 9M15A (FL-23)  |
| F13      | 2010000320 | Filter      | 9M22D2 (FL-30) |
| F14      | 2010000950 | Filter      | 9M6A1 (FL-116) |
| X1       | 6050001800 | Crystal     | CR-49          |
| L1       | 6140000080 | Coil        | LR-20          |
| L2       | 6180000700 | Coil        | LAL 03NA R27M  |
| L3       | 6180000710 | Coil        | LAL 03NA R33M  |
| L4       | 6180000860 | Coil        | LAL 03NA 5R6K  |
| L5       | 6180000960 | Coil        | LAL 03NA 102K  |
| L6       | 6140002050 | Coil        | LR-224         |
| L7       | 6150001770 | Coil        | LS-198         |
| L8       | 6110001620 | Coil        | LA-245         |
| L9       | 6180000900 | Coil        | LAL 03NA 101K  |
| L10      | 6140001460 | Coil        | LR-170         |
| L11      | 6140001260 | Coil        | LR-151         |
| L12      | 6180000740 | Coil        | LAL 03NA R56M  |
| L13      | 6180000690 | Coil        | LAL 03NA R22M  |
| L14      | 6150000990 | Coil        | LS-114         |
| L16      | 6150001770 | Coil        | LS-198         |
| L17      | 6150001770 | Coil        | LS-198         |
| L18      | 6140002060 | Coil        | LR-225         |
| L19      | 6140002060 | Coil        | LR-225         |
| L20      | 6180000900 | Coil        | LAL 03NA 101K  |
| L21      | 6150001640 | Coil        | LS-180B        |
| L22      | 6150000700 | Coil        | LS-90A         |
| L23      | 6150000700 | Coil        | LS-90A         |
| L24      | 6180000950 | Coil        | LAL 03NA 150K  |
| L25      | 6150001590 | Coil        | LS-175         |
| L26      | 6150001590 | Coil        | LS-175         |
| L27      | 6140000640 | Coil        | LR-86          |
| L28      | 6140000060 | Coil        | LR-18          |
| L29      | 6110001650 | Coil        | LA-248         |
| L30      | 6180000700 | Coil        | LAL 03NA R27M  |
| L31      | 6140002050 | Coil        | LR-224         |
| L32      | 6180000880 | Coil        | LAL 03NA 100K  |
| L33      | 6150001770 | Coil        | LS-198         |
| L34      | 6150002430 | Coil        | LS-254         |
| L35      | 6150002430 | Coil        | LS-254         |
| L36      | 6150000990 | Coil        | LS-114         |
| L37      | 6150001470 | Coil        | LS-163         |
| L38      | 6180000940 | Coil        | LAL 03NA 270K  |
| L39      | 6180000930 | Coil        | LAL 03NA 220K  |
| L40      | 6180000900 | Coil        | LAL 03NA 101K  |
| L41      | 6180000900 | Coil        | LAL 03NA 101K  |
| L42      | 6180000850 | Coil        | LAL 03NA 4R7K  |
| L43      | 6180000840 | Coil        | LAL 03NA 3R9K  |
| L44      | 6180000900 | Coil        | LAL 03NA 101K  |
| L45      | 6180000870 | Coil        | LAL 03NA 6R8K  |
| L46      | 6180000850 | Coil        | LAL 03NA 4R7K  |
| L47      | 6180000900 | Coil        | LAL 03NA 101K  |
| L48      | 6180000820 | Coil        | LAL 03NA 2R7M  |
| L49      | 6180000810 | Coil        | LAL 03NA 2R2M  |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                 |
|----------|------------|-------------|-----------------|
| L50      | 6180000820 | Coil        | LAL 03NA 2R7M   |
| L51      | 6180000830 | Coil        | LAL 03NA 3R3K   |
| L52      | 6180000900 | Coil        | LAL 03NA 101K   |
| L53      | 6180000800 | Coil        | LAL 03NA 1R8M   |
| L54      | 6180000780 | Coil        | LAL 03NA 1R2M   |
| L55      | 6180000790 | Coil        | LAL 03NA 1R5M   |
| L56      | 6180000790 | Coil        | LAL 03NA 1R5M   |
| L57      | 6180000900 | Coil        | LAL 03NA 101K   |
| L58      | 6180000780 | Coil        | LAL 03NA 1R2M   |
| L59      | 6180000770 | Coil        | LAL 03NA 1R0M   |
| L60      | 6180000760 | Coil        | LAL 03NA R82M   |
| L61      | 6180000760 | Coil        | LAL 03NA R82M   |
| L62      | 6180000900 | Coil        | LAL 03NA 101K   |
| L63      | 6180000760 | Coil        | LAL 03NA R82M   |
| L64      | 6180000750 | Coil        | LAL 03NA R68M   |
| L65      | 6180000750 | Coil        | LAL 03NA R68M   |
| L66      | 6180000740 | Coil        | LAL 03NA R56M   |
| L67      | 6180000900 | Coil        | LAL 03NA 101K   |
| L68      | 6180000730 | Coil        | LAL 03NA R47M   |
| L69      | 6180000730 | Coil        | LAL 03NA R47M   |
| L70      | 6180000730 | Coil        | LAL 03NA R47M   |
| L71      | 6180000730 | Coil        | LAL 03NA R47M   |
| L72      | 6180000900 | Coil        | LAL 03NA 101K   |
| L73      | 6180000700 | Coil        | LAL 03NA R27M   |
| L74      | 6180000700 | Coil        | LAL 03NA R27M   |
| L75      | 6180000710 | Coil        | LAL 03NA R33M   |
| L76      | 6180000710 | Coil        | LAL 03NA R33M   |
| L77      | 6150001590 | Coil        | LS-175          |
| L78      | 6150001470 | Coil        | LS-163          |
| L79      | 6150001590 | Coil        | LS-175          |
| L80      | 6170000140 | Coil        | LW-15           |
| L81      | 6180000690 | Coil        | LAL 03NA R22M   |
| L82      | 6150001220 | Coil        | LS-134          |
| L83      | 6150001210 | Coil        | LS-133A         |
| L85      | 6180000900 | Coil        | LAL 03NA 101K   |
| L86      | 6180000900 | Coil        | LAL 03NA 101K   |
| L87      | 6180000900 | Coil        | LAL 03NA 101K   |
| L88      | 6180000880 | Coil        | LAL 03NA 100K   |
| L89      | 6180000950 | Coil        | LAL 03NA 150K   |
| L90      | 6180000950 | Coil        | LAL 03NA 150K   |
| L91      | 6180000900 | Coil        | LAL 03NA 101K   |
| L92      | 6180000900 | Coil        | LAL 03NA 101K   |
| L93      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L94      | 6180000900 | Coil        | LAL 03NA 101K   |
| L95      | 6180000900 | Coil        | LAL 03NA 101K   |
| L96      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L97      | 6180000900 | Coil        | LAL 03NA 101K   |
| L98      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L99      | 6180000900 | Coil        | LAL 03NA 101K   |
| L100     | 6180000900 | Coil        | LAL 03NA 101K   |
| L101     | 6180000900 | Coil        | LAL 03NA 101K   |
| L102     | 6910000670 | Coil        | BT01RN1-A61-001 |
| L103     | 6180000900 | Coil        | LAL 03NA 101K   |
| L104     | 6180002460 | Coil        | LAL 02KR 150K   |
| R1       | 7010004150 | Resistor    | R20J 470 Ω      |
| R2       | 7010003960 | Resistor    | R20J 12 Ω       |
| R3       | 7010003360 | Resistor    | ELR20J 470 Ω    |
| R4       | 7010000950 | Resistor    | R25J 22 Ω       |
| R5       | 7010004310 | Resistor    | R20J 8.2 kΩ     |
| R6       | 7010003920 | Resistor    | R20J 5.6 Ω      |
| R7       | 7010004170 | Resistor    | R20J 680 Ω      |
| R8       | 7010003250 | Resistor    | ELR20J 56 Ω     |
| R9       | 7010003660 | Resistor    | ELR20J 100 kΩ   |
| R10      | 7010003660 | Resistor    | ELR20J 100 kΩ   |
| R11      | 7010003530 | Resistor    | ELR20J 10 kΩ    |
| R12      | 7010003240 | Resistor    | ELR20J 47 Ω     |
| R13      | 7010003200 | Resistor    | ELR20J 22 Ω     |
| R14      | 7010004170 | Resistor    | R20J 680 Ω      |
| R15      | 7010003490 | Resistor    | ELR20J 5.6 kΩ   |
| R16      | 7010003260 | Resistor    | ELR20J 68 Ω     |
| R17      | 7010004070 | Resistor    | R20J 100 Ω      |
| R18      | 7010004300 | Resistor    | R20J 6.8 kΩ     |
| R19      | 7010000790 | Resistor    | R25J 1 Ω        |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                 |
|----------|------------|-----------------------------|
| R20      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R21      | 7010003510 | Resistor ELR20J 6.8 kΩ      |
| R22      | 7010004090 | Resistor R20J 150 Ω         |
| R23      | 7010004270 | Resistor R20J 4.7 kΩ        |
| R24      | 7010003330 | Resistor ELR20J 270 Ω       |
| R25      | 7010003330 | Resistor ELR20J 270 Ω       |
| R26      | 7010003190 | Resistor ELR20J 18 Ω        |
| R27      | 7010003460 | Resistor ELR20J 3.3 kΩ      |
| R28      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R29      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R30      | 7010001190 | Resistor R25J 2.2 kΩ        |
| R31      | 7010003320 | Resistor ELR20J 220 Ω       |
| R32      | 7010000990 | Resistor R25J 47 Ω          |
| R33      | 7010003740 | Resistor ELR20J 470 kΩ      |
| R34      | 7010003580 | Resistor ELR20J 22 kΩ       |
| R35      | 7510000110 | Thermistor ERT-D2FGL251S    |
| R36      | 7010004130 | Resistor R20J 330 Ω         |
| R37      | 7010003280 | Resistor ELR20J 100 Ω       |
| R38      | 7010004450 | Resistor R20J 100 kΩ        |
| R39      | 7010004090 | Resistor R20J 150 Ω         |
| R40      | 7010004070 | Resistor R20J 100 Ω         |
| R41      | 7010003950 | Resistor R20J 10 Ω          |
| R42      | 7010003620 | Resistor ELR20J 47 kΩ       |
| R43      | 7010003660 | Resistor ELR20J 100 kΩ      |
| R44      | 7010001030 | Resistor R25J 100 Ω         |
| R45      | 7010003620 | Resistor ELR20J 47 kΩ       |
| R46      | 7010003660 | Resistor ELR20J 100 kΩ      |
| R47      | 7010003530 | Resistor ELR20J 10 kΩ       |
| R48      | 7010003510 | Resistor ELR20J 6.8 kΩ      |
| R49      | 7010004130 | Resistor R20J 330 Ω         |
| R50      | 7010003580 | Resistor ELR20J 22 kΩ       |
| R51      | 7010003400 | Resistor ELR20J 1 kΩ        |
| R52      | 7010004320 | Resistor R20J 10 kΩ         |
| R53      | 7010004320 | Resistor R20J 10 kΩ         |
| R54      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R55      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R56      | 7010003460 | Resistor ELR20J 3.3 kΩ      |
| R57      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R58      | 7010004070 | Resistor R20J 100 Ω         |
| R59      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R60      | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R61      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R62      | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R63      | 7010001030 | Resistor R25J 100 Ω         |
| R64      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R65      | 7010001110 | Resistor R25J 470 Ω         |
| R66      | 7010004110 | Resistor R20J 220 Ω         |
| R67      | 7010003990 | Resistor R20J 22 Ω          |
| R68      | 7010003320 | Resistor ELR20J 220 Ω       |
| R69      | 7010000870 | Resistor R25J 4.7 Ω         |
| R70      | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R71      | 7010003400 | Resistor ELR20J 1 kΩ        |
| R72      | 7010003400 | Resistor ELR20J 1 kΩ        |
| R73      | 7010003360 | Resistor ELR20J 470 Ω       |
| R74      | 7010003360 | Resistor ELR20J 470 Ω       |
| R75      | 7010003530 | Resistor ELR20J 10 kΩ       |
| R76      | 7010004030 | Resistor R20J 47 Ω          |
| R77      | 7010004090 | Resistor R20J 150 Ω         |
| R78      | 7010001530 | Resistor R25J 1 MΩ          |
| R79      | 7010003990 | Resistor R20J 22 Ω          |
| R80      | 7010004090 | Resistor R20J 150 Ω         |
| R81      | 7010000990 | Resistor R25J 47 Ω          |
| R82      | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R83      | 7010004230 | Resistor R20J 2.2 kΩ        |
| R84      | 7010004030 | Resistor R20J 47 Ω          |
| R85      | 7310000760 | Trimmer RH0651CJ4J01A (223) |
| R86      | 7010004070 | Resistor R20J 100 Ω         |
| R87      | 7010004950 | Resistor R20J 1.5 MΩ        |
| R88      | 7010003360 | Resistor ELR20J 470 Ω       |
| R89      | 7510000100 | Thermistor ERT-D2FGL601S    |
| R90      | 7010003530 | Resistor ELR20J 10 kΩ       |
| R91      | 7010004030 | Resistor R20J 47 Ω          |
| R92      | 7010003340 | Resistor ELR20J 330 Ω       |
| R93      | 7010001110 | Resistor R25J 470 Ω         |
| R94      | 7010000330 | Resistor ELR25J 470 Ω       |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                 |
|----------|------------|-----------------------------|
| R95      | 7010004070 | Resistor R20J 100 Ω         |
| R96      | 7010004070 | Resistor R20J 100 Ω         |
| R97      | 7010004070 | Resistor R20J 100 Ω         |
| R98      | 7010004070 | Resistor R20J 100 Ω         |
| R99      | 7010004070 | Resistor R20J 100 Ω         |
| R100     | 7010004070 | Resistor R20J 100 Ω         |
| R101     | 7410000180 | Resistor Array RMX- 8 103K  |
| R102     | 7010003350 | Resistor ELR20J 390 Ω       |
| R103     | 7010004040 | Resistor R20J 56 Ω          |
| R104     | 7010003620 | Resistor ELR20J 47 kΩ       |
| R105     | 7010000870 | Resistor R25J 4.7 Ω         |
| R106     | 7010004270 | Resistor R20J 4.7 kΩ        |
| R107     | 7010003740 | Resistor ELR20J 470 kΩ      |
| R108     | 7010004370 | Resistor R20J 22 kΩ         |
| R109     | 7010004420 | Resistor R20J 56 kΩ         |
| R110     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R111     | 7010004320 | Resistor R20J 10 kΩ         |
| R112     | 7010001030 | Resistor R25J 100 Ω         |
| R113     | 7010003820 | Resistor ELR20J 3.3 MΩ      |
| R114     | 7010004570 | Resistor R20J 1 MΩ          |
| R115     | 7010004370 | Resistor R20J 22 kΩ         |
| R116     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R117     | 7010003580 | Resistor ELR20J 22 kΩ       |
| R118     | 7010004610 | Resistor R20J 3.3 MΩ        |
| R119     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R120     | 7010004070 | Resistor R20J 100 Ω         |
| R121     | 7010004320 | Resistor R20J 10 kΩ         |
| R122     | 7010004250 | Resistor R20J 3.3 kΩ        |
| R123     | 7010003360 | Resistor ELR20J 470 Ω       |
| R124     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R125     | 7010003550 | Resistor ELR20J 15 kΩ       |
| R126     | 7010003510 | Resistor ELR20J 6.8 kΩ      |
| R127     | 7010003640 | Resistor ELR20J 68 kΩ       |
| R128     | 7010003660 | Resistor ELR20J 100 kΩ      |
| R129     | 7010003400 | Resistor ELR20J 1 kΩ        |
| R130     | 7010004150 | Resistor R20J 470 Ω         |
| R131     | 7010003700 | Resistor ELR20J 220 kΩ      |
| R132     | 7010004340 | Resistor R20J 15 kΩ         |
| R133     | 7010004300 | Resistor R20J 6.8 kΩ        |
| R134     | 7010004250 | Resistor R20J 3.3 kΩ        |
| R135     | 7010003240 | Resistor ELR20J 47 Ω        |
| R136     | 7010004030 | Resistor R20J 47 Ω          |
| R137     | 7010004070 | Resistor R20J 100 Ω         |
| R138     | 7310000740 | Trimmer RH0651CS3J2KA (472) |
| R139     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R140     | 7510000120 | Thermistor ERT-D2FGL332S    |
| R141     | 7010004070 | Resistor R20J 100 Ω         |
| R142     | 7010003300 | Resistor ELR20J 150 Ω       |
| R143     | 7010004150 | Resistor R20J 470 Ω         |
| R144     | 7010004410 | Resistor R20J 47 kΩ         |
| R145     | 7010001030 | Resistor R25J 100 Ω         |
| R146     | 7010004230 | Resistor R20J 2.2 kΩ        |
| R147     | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R148     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R149     | 7010003830 | Resistor R20J 1 Ω           |
| R150     | 7010003300 | Resistor ELR20J 150 Ω       |
| R151     | 7010003400 | Resistor ELR20J 1 kΩ        |
| R152     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R153     | 7010004320 | Resistor R20J 10 kΩ         |
| R154     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R155     | 7010004320 | Resistor R20J 10 kΩ         |
| R156     | 7010004190 | Resistor R20J 1 kΩ          |
| R157     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R158     | 7010001150 | Resistor R25J 1 kΩ          |
| R159     | 7010003400 | Resistor ELR20J 1 kΩ        |
| R160     | 7010004390 | Resistor R20J 33 kΩ         |
| R161     | 7010003990 | Resistor R20J 22 Ω          |
| R162     | 7010003400 | Resistor ELR20J 1 kΩ        |
| R164     | 7010003660 | Resistor ELR20J 100 kΩ      |
| R165     | 7010004070 | Resistor R20J 100 Ω         |
| R166     | 7010004450 | Resistor R20J 100 kΩ        |
| R167     | 7010001400 | Resistor R25J 100 kΩ        |
| R168     | 7010003660 | Resistor ELR20J 100 kΩ      |
| R169     | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R170     | 7010004230 | Resistor R20J 2.2 kΩ        |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                 |
|----------|------------|-----------------------------|
| R171     | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R172     | 7010004230 | Resistor R20J 2.2 kΩ        |
| R173     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R174     | 7010004260 | Resistor R20J 3.9 kΩ        |
| R175     | 7010003420 | Resistor ELR20J 1.5 kΩ      |
| R176     | 7010003660 | Resistor ELR20J 100 kΩ      |
| R177     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R178     | 7010003660 | Resistor ELR20J 100 kΩ      |
| R179     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R180     | 7010004490 | Resistor R20J 220 kΩ        |
| R181     | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R182     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R183     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R184     | 7010004230 | Resistor R20J 2.2 kΩ        |
| R185     | 7010003720 | Resistor ELR20J 330 kΩ      |
| R186     | 7310000790 | Trimmer RH0651C15J1UA (104) |
| R187     | 7010004410 | Resistor R20J 47 kΩ         |
| R188     | 7010003620 | Resistor ELR20J 47 kΩ       |
| R189     | 7010001110 | Resistor R25J 470 Ω         |
| R190     | 7010004190 | Resistor R20J 1 kΩ          |
| R191     | 7010004410 | Resistor R20J 47 kΩ         |
| R192     | 7010003620 | Resistor ELR20J 47 kΩ       |
| R193     | 7010004390 | Resistor R20J 33 kΩ         |
| R194     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R195     | 7010003600 | Resistor ELR20J 33 kΩ       |
| R196     | 7010003780 | Resistor ELR20J 1 MΩ        |
| R197     | 7010004150 | Resistor R20J 470 Ω         |
| R198     | 7010004570 | Resistor R20J 1 MΩ          |
| R199     | 7010005220 | Resistor ELR20J 10 MΩ       |
| R200     | 7010004570 | Resistor R20J 1 MΩ          |
| R201     | 7010004270 | Resistor R20J 4.7 kΩ        |
| R202     | 7010001110 | Resistor R25J 470 Ω         |
| R203     | 7010004500 | Resistor R20J 270 kΩ        |
| R204     | 7010003720 | Resistor ELR20J 330 kΩ      |
| R205     | 7010003360 | Resistor ELR20J 470 Ω       |
| R206     | 7010003650 | Resistor ELR20J 82 kΩ #03   |
| R206     | 7010003650 | Resistor ELR20J 82 kΩ #04   |
| R206     | 7010003480 | Resistor ELR20J 4.7 kΩ #01  |
| R206     | 7010003480 | Resistor ELR20J 4.7 kΩ #02  |
| R207     | 7010003510 | Resistor ELR20J 6.8 kΩ      |
| R208     | 7310000740 | Trimmer RH0651CS3J2KA (472) |
| R209     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R210     | 7310000790 | Trimmer RH0651C15J1UA (104) |
| R211     | 7010004530 | Resistor R20J 470 kΩ        |
| R212     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R213     | 7010003810 | Resistor ELR20J 2.2 MΩ      |
| R214     | 7010003360 | Resistor ELR20J 470 Ω       |
| R215     | 7010001050 | Resistor R25J 150 Ω         |
| R216     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R217     | 7010001400 | Resistor R25J 100 kΩ        |
| R218     | 7010004190 | Resistor R20J 1 kΩ          |
| R220     | 7010003740 | Resistor ELR20J 470 kΩ      |
| R221     | 7010003740 | Resistor ELR20J 470 kΩ      |
| R222     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R223     | 7010004070 | Resistor R20J 100 Ω         |
| R224     | 7010003530 | Resistor ELR20J 10 kΩ       |
| R225     | 7010000090 | Resistor ELR25J 4.7 Ω       |
| R226     | 7010000370 | Resistor ELR25J 1 kΩ        |
| R227     | 7010000090 | Resistor ELR25J 4.7 Ω       |
| R228     | 7010000370 | Resistor ELR25J 1 kΩ        |
| R229     | 7010000090 | Resistor ELR25J 4.7 Ω       |
| R230     | 7010003280 | Resistor ELR20J 100 Ω       |
| R231     | 7410000140 | Resistor Array RMX- 6 472K  |
| R232     | 7010004110 | Resistor R20J 220 Ω         |
| R233     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R234     | 7010003480 | Resistor ELR20J 4.7 kΩ      |
| R235     | 7010003490 | Resistor ELR20J 5.6 kΩ      |
| R236     | 7010004310 | Resistor R20J 8.2 kΩ        |
| R237     | 7010003380 | Resistor ELR20J 680 Ω       |
| R238     | 7310000860 | Trimmer RH1051D13J0JA (102) |
| R239     | 7010003540 | Resistor ELR20J 12 kΩ       |
| R240     | 7010003440 | Resistor ELR20J 2.2 kΩ      |
| R241     | 7310000750 | Trimmer RH0651C14J2WA (103) |
| R242     | 7010004320 | Resistor R20J 10 kΩ         |
| R243     | 7010001030 | Resistor R25J 100 Ω         |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                     |
|----------|------------|---------------------------------|
| R244     | 7210001540 | Variable Resistor RK09K1110AEFA |
| R245     | 7010004320 | Resistor R20J 10 kΩ             |
| R246     | 7010004190 | Resistor R20J 1 kΩ              |
| R247     | 7010004300 | Resistor R20J 6.8 kΩ            |
| R248     | 7010004570 | Resistor R20J 1 MΩ              |
| R249     | 7010001030 | Resistor R25J 100 Ω             |
| R250     | 7010004030 | Resistor R20J 47 Ω              |
| R251     | 7010003440 | Resistor ELR20J 2.2 kΩ          |
| R252     | 7010003660 | Resistor ELR20J 100 kΩ          |
| R253     | 7010003660 | Resistor ELR20J 100 kΩ          |
| R254     | 7010001280 | Resistor R25J 10 kΩ             |
| R255     | 7010004190 | Resistor R20J 1 kΩ              |
| R256     | 7010004270 | Resistor R20J 4.7 kΩ            |
| R257     | 7010003480 | Resistor ELR20J 4.7 kΩ          |
| R258     | 7010001360 | Resistor R25J 47 kΩ             |
| R259     | 7010004270 | Resistor R20J 4.7 kΩ            |
| R260     | 7010003400 | Resistor ELR20J 1 kΩ            |
| R261     | 7010003360 | Resistor ELR20J 470 Ω           |
| R262     | 7010003460 | Resistor ELR20J 3.3 kΩ          |
| R263     | 7010004230 | Resistor R20J 2.2 kΩ            |
| R264     | 7010003580 | Resistor ELR20J 22 kΩ           |
| R265     | 7010003530 | Resistor ELR20J 10 kΩ           |
| R266     | 7010001150 | Resistor R25J 1 kΩ              |
| R267     | 7010003480 | Resistor ELR20J 4.7 kΩ          |
| R268     | 7010003360 | Resistor ELR20J 470 Ω           |
| R269     | 7010003120 | Resistor ELR20J 4.7 Ω           |
| R270     | 7010004300 | Resistor R20J 6.8 kΩ            |
| R271     | 7010004320 | Resistor R20J 10 kΩ             |
| R272     | 7010003380 | Resistor ELR20J 680 Ω           |
| R273     | 7010004450 | Resistor R20J 100 kΩ            |
| R274     | 7010004320 | Resistor R20J 10 kΩ             |
| R275     | 7010003040 | Resistor ELR20J 1 Ω             |
| C1       | 4010000520 | Ceramic DD108 B 472K 50V        |
| C2       | 4040000260 | Barrier Layer UZE 08X 104M      |
| C3       | 4010000380 | Ceramic DD107 SL 221J 50V       |
| C4       | 4010000260 | Ceramic DD104 SL 470J 50V       |
| C5       | 4010000380 | Ceramic DD107 SL 221J 50V       |
| C6       | 4010000150 | Ceramic DD104 SL 150J 50V       |
| C7       | 4010000350 | Ceramic DD106 SL 151J 50V       |
| C8       | 4040000110 | Barrier Layer UAT 04X 222K      |
| C9       | 4040000260 | Barrier Layer UZE 08X 104M      |
| C10      | 4040000130 | Barrier Layer UAT 05X 332K      |
| C11      | 4010000050 | Ceramic DD104 SL 030C 50V       |
| C12      | 4020000730 | Cylinder UP050 SL 150J          |
| C13      | 4010000340 | Ceramic DD105 SL 121J 50V       |
| C14      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C15      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C16      | 4010000020 | Ceramic DD104 SL 010C 50V       |
| C17      | 4010000120 | Ceramic DD104 SL 100D 50V       |
| C18      | 4010000100 | Ceramic DD104 SL 080D 50V       |
| C19      | 4010000020 | Ceramic DD104 SL 010C 50V       |
| C20      | 4010000500 | Ceramic DD104 B 102K 50V        |
| C21      | 4010000330 | Ceramic DD105 SL 101J 50V       |
| C23      | 4010000220 | Ceramic DD104 SL 330J 50V       |
| C25      | 4010000500 | Ceramic DD104 B 102K 50V        |
| C26      | 4010000100 | Ceramic DD104 SL 080D 50V       |
| C27      | 4040000150 | Barrier Layer UAT 05X 472K      |
| C28      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C29      | 4010000500 | Ceramic DD104 B 102K 50V        |
| C30      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C31      | 4010000070 | Ceramic DD104 SL 050C 50V       |
| C32      | 4010000070 | Ceramic DD104 SL 050C 50V       |
| C33      | 4010000300 | Ceramic DD104 SL 680J 50V       |
| C34      | 4010000020 | Ceramic DD104 SL 010C 50V       |
| C35      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C36      | 4010000430 | Ceramic DD109 SL 471J 50V       |
| C37      | 4010000340 | Ceramic DD105 SL 121J 50V       |
| C38      | 4020000030 | Cylinder UP125 SL 2R2K          |
| C39      | 4010000070 | Ceramic DD104 SL 050C 50V       |
| C40      | 4040000260 | Barrier Layer UZE 08X 104M      |
| C42      | 4040000260 | Barrier Layer UZE 08X 104M      |
| C43      | 4010000520 | Ceramic DD108 B 472K 50V        |
| C44      | 4010000520 | Ceramic DD108 B 472K 50V        |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                |
|----------|------------|----------------------------|
| C46      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C47      | 4010000200 | Ceramic DD104 SL 270J 50V  |
| C49      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C50      | 4040000150 | Barrier Layer UAT 05X 472K |
| C51      | 4510001100 | Electrolytic 16 MS7 10 μF  |
| C52      | 4040000150 | Barrier Layer UAT 05X 472K |
| C53      | 4040000150 | Barrier Layer UAT 05X 472K |
| C54      | 4040000150 | Barrier Layer UAT 05X 472K |
| C55      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C56      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C58      | 4010000340 | Ceramic DD105 SL 121J 50V  |
| C59      | 4010000180 | Ceramic DD104 SL 220J 50V  |
| C60      | 4510001100 | Electrolytic 16 MS7 10 μF  |
| C61      | 4510002640 | Electrolytic 25 SS 47 μF   |
| C62      | 4040000260 | Barrier Layer UZE 08X 104M |
| C64      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C65      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C66      | 4040000260 | Barrier Layer UZE 08X 104M |
| C67      | 4040000150 | Barrier Layer UAT 05X 472K |
| C68      | 4040000150 | Barrier Layer UAT 05X 472K |
| C69      | 4040000260 | Barrier Layer UZE 08X 104M |
| C70      | 4040000250 | Barrier Layer UAT 08X 473M |
| C71      | 4040000250 | Barrier Layer UAT 08X 473M |
| C72      | 4010000330 | Ceramic DD105 SL 101J 50V  |
| C73      | 4040000250 | Barrier Layer UAT 08X 473M |
| C74      | 4040000250 | Barrier Layer UAT 08X 473M |
| C75      | 4040000250 | Barrier Layer UAT 08X 473M |
| C77      | 4010000330 | Ceramic DD105 SL 101J 50V  |
| C78      | 4010000350 | Ceramic DD106 SL 151J 50V  |
| C79      | 4010000120 | Ceramic DD104 SL 100D 50V  |
| C80      | 4010000320 | Ceramic DD104 SL 820J 50V  |
| C81      | 4040000260 | Barrier Layer UZE 08X 104M |
| C82      | 4010000120 | Ceramic DD104 SL 100D 50V  |
| C83      | 4010004840 | Ceramic DD305 F 104Z 12V   |
| C84      | 4010004840 | Ceramic DD305 F 104Z 12V   |
| C85      | 4010000500 | Ceramic DD104 B 102K 50V   |
| C86      | 4040000260 | Barrier Layer UZE 08X 104M |
| C87      | 4010000070 | Ceramic DD104 SL 050C 50V  |
| C89      | 4010000100 | Ceramic DD104 SL 080D 50V  |
| C90      | 4010000100 | Ceramic DD104 SL 080D 50V  |
| C91      | 4040000260 | Barrier Layer UZE 08X 104M |
| C92      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C93      | 4010000080 | Ceramic DD104 SL 060D 50V  |
| C94      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C95      | 4510001150 | Electrolytic 50 MS7 R47 μF |
| C96      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C97      | 4510001180 | Electrolytic 50 MS7 3R3 μF |
| C99      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C100     | 4510002640 | Electrolytic 25 SS 47 μF   |
| C101     | 4040000260 | Barrier Layer UZE 08X 104M |
| C102     | 4010000500 | Ceramic DD104 B 102K 50V   |
| C109     | 4510001100 | Electrolytic 16 MS7 10 μF  |
| C110     | 4040000190 | Barrier Layer UAT 05X 103K |
| C112     | 4510001100 | Electrolytic 16 MS7 10 μF  |
| C113     | 4510001160 | Electrolytic 50 MS7 1 μF   |
| C114     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C115     | 4510002640 | Electrolytic 25 SS 47 μF   |
| C116     | 4010000330 | Ceramic DD105 SL 101J 50V  |
| C117     | 4010000350 | Ceramic DD106 SL 151J 50V  |
| C118     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C119     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C120     | 4040000260 | Barrier Layer UZE 08X 104M |
| C121     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C122     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C123     | 4010000380 | Ceramic DD107 SL 221J 50V  |
| C124     | 4510001140 | Electrolytic 50 MS7 R22 μF |
| C125     | 4040000250 | Barrier Layer UAT 08X 473M |
| C126     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C127     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C128     | 4010000350 | Ceramic DD106 SL 151J 50V  |
| C129     | 4010000180 | Ceramic DD104 SL 220J 50V  |
| C130     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C132     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C133     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C135     | 4010000520 | Ceramic DD108 B 472K 50V   |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                         |
|----------|------------|-------------------------------------|
| C136     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C137     | 4010000180 | Ceramic DD104 SL 220J 50V           |
| C138     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C139     | 4010000500 | Ceramic DD104 B 102K 50V            |
| C140     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C141     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C142     | 4010000080 | Ceramic DD104 SL 060D 50V           |
| C143     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C144     | 4040000170 | Barrier Layer UAT 05X 682K          |
| C145     | 4040000460 | Barrier Layer RAU 08SA 821K         |
| C146     | 4040000210 | Barrier Layer UAT 06X 153K          |
| C147     | 4040000090 | Barrier Layer UAT 04X 152K          |
| C148     | 4040000070 | Barrier Layer UAT 04X 102K          |
| C149     | 4020000630 | Cylinder UP050 B 101K               |
| C150     | 4040000070 | Barrier Layer UAT 04X 102K          |
| C151     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C152     | 4040000260 | Barrier Layer UZE 08X 104M          |
| C153     | 4040000260 | Barrier Layer UZE 08X 104M          |
| C154     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C155     | 4040000090 | Barrier Layer UAT 04X 152K          |
| C156     | 4040000110 | Barrier Layer UAT 04X 222K          |
| C157     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C158     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C159     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C160     | 4010000360 | Ceramic DD106 SL 181J 50V           |
| C161     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C162     | 4040000110 | Barrier Layer UAT 04X 222K          |
| C163     | 4040000210 | Barrier Layer UAT 06X 153K          |
| C164     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C165     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C166     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C167     | 4010000440 | Ceramic DD109 SL 511J 50V           |
| C168     | 4010000330 | Ceramic DD105 SL 101J 50V           |
| C169     | 4010000430 | Ceramic DD109 SL 471J 50V           |
| C170     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C171     | 4040000160 | Barrier Layer UAT 05X 562K          |
| C172     | 4040000460 | Barrier Layer RAU 08SA 821K         |
| C173     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C174     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C175     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C176     | 4010000270 | Ceramic DD104 SL 510J 50V           |
| C177     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C178     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C179     | 4040000120 | Barrier Layer UAT 05X 272K          |
| C180     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C181     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C182     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C183     | 4010000410 | Ceramic DD107 SL 331J 50V           |
| C184     | 4010000260 | Ceramic DD104 SL 470J 50V           |
| C185     | 4010000380 | Ceramic DD107 SL 221J 50V           |
| C186     | 4010000380 | Ceramic DD107 SL 221J 50V           |
| C187     | 4040000100 | Barrier Layer UAT 04X 182K          |
| C188     | 4010000370 | Ceramic DD106 SL 201J 50V           |
| C189     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C190     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C191     | 4010000380 | Ceramic DD107 SL 221J 50V           |
| C192     | 4010000160 | Ceramic DD104 SL 180J 50V           |
| C193     | 4010000330 | Ceramic DD105 SL 101J 50V           |
| C194     | 4010000380 | Ceramic DD107 SL 221J 50V           |
| C195     | 4040000080 | Barrier Layer UAT 04X 122K          |
| C196     | 4010000350 | Ceramic DD106 SL 151J 50V           |
| C197     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C198     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C199     | 4010000220 | Ceramic DD104 SL 330J 50V           |
| C200     | 4010000340 | Ceramic DD105 SL 121J 50V           |
| C201     | 4010000240 | Ceramic DD104 SL 390J 50V           |
| C202     | 4010000300 | Ceramic DD104 SL 680J 50V           |
| C203     | 4010000340 | Ceramic DD105 SL 121J 50V           |
| C204     | 4040000460 | Barrier Layer RAU 08SA 821K         |
| C205     | 4010000330 | Ceramic DD105 SL 101J 50V           |
| C206     | 4040000250 | Barrier Layer UAT 08X 473M          |
| C207     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C208     | 4530000350 | Capacitor Array B8ZC0111-32N        |
| C209     | 4010000520 | Ceramic DD108 B 472K 50V            |
| C210     | 4510002380 | Electrolytic 16 SS 470 μF (10X12.5) |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                            |
|----------|------------|--|
| C211     | 4040000260 | Barrier Layer UZE 08X 104M             |
| C212     | 4510003040 | Electrolytic 16 SS 100 µF              |
| C213     | 4510000310 | Electrolytic 16 MS16 1000 µF (12.5X16) |
| C214     | 4510002640 | Electrolytic 25 SS 47 µF               |
| C215     | 4510002730 | Electrolytic 10 SS 100 µF              |
| C216     | 4040000250 | Barrier Layer UAT 08X 473M             |
| C217     | 4510001140 | Electrolytic 50 MS7 R22 µF             |
| C218     | 4510002730 | Electrolytic 10 SS 100 µF              |
| C219     | 4040000110 | Barrier Layer UAT 04X 222K             |
| C220     | 4310000060 | Mylar F2D 50V 223K                     |
| C221     | 4510001100 | Electrolytic 16 MS7 10 µF              |
| C222     | 4510002640 | Electrolytic 25 SS 47 µF               |
| C223     | 4510001170 | Electrolytic 50 MS7 2R2 µF             |
| C224     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C225     | 4510001150 | Electrolytic 50 MS7 R47 µF             |
| C226     | 4040000210 | Barrier Layer UAT 06X 153K             |
| C227     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C228     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C229     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C230     | 4010000840 | Ceramic DD105 CH 390J 50V              |
| C231     | 4010001020 | Ceramic DD111 CH 221J 50V              |
| C232     | 4010001020 | Ceramic DD111 CH 221J 50V              |
| C233     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C234     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C235     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C236     | 4040000250 | Barrier Layer UAT 08X 473M             |
| C237     | 4010000180 | Ceramic DD104 SL 220J 50V              |
| C238     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C239     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C240     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C241     | 4010000220 | Ceramic DD104 SL 330J 50V              |
| C242     | 4310000060 | Mylar F2D 50V 223K                     |
| C243     | 4310000060 | Mylar F2D 50V 223K                     |
| C244     | 4310000060 | Mylar F2D 50V 223K                     |
| C245     | 4510001100 | Electrolytic 16 MS7 10 µF              |
| C246     | 4510002850 | Electrolytic 25 SS 22 µF               |
| C247     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C248     | 4510002640 | Electrolytic 25 SS 47 µF               |
| C249     | 4510001160 | Electrolytic 50 MS7 1 µF               |
| C250     | 4510001170 | Electrolytic 50 MS7 2R2 µF             |
| C251     | 4510001160 | Electrolytic 50 MS7 1 µF               |
| C252     | 4510001160 | Electrolytic 50 MS7 1 µF               |
| C253     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C254     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C255     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C256     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C257     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C258     | 4010000330 | Ceramic DD105 SL 101J 50V              |
| C259     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C260     | 4040000260 | Barrier Layer UZE 08X 104M             |
| C261     | 4510001100 | Electrolytic 16 MS7 10 µF              |
| C262     | 4040000250 | Barrier Layer UAT 08X 473M             |
| C263     | 4010000500 | Ceramic DD104 B 102K 50V               |
| C264     | 4510001160 | Electrolytic 50 MS7 1 µF               |
| C265     | 4040000190 | Barrier Layer UAT 05X 103K             |
| C266     | 4040000190 | Barrier Layer UAT 05X 103K             |
| C267     | 4510001150 | Electrolytic 50 MS7 R47 µF             |
| C268     | 4510001150 | Electrolytic 50 MS7 R47 µF             |
| C269     | 4510002440 | Electrolytic 16 SS 220 µF (8X11)       |
| C270     | 4040000260 | Barrier Layer UZE 08X 104M             |
| C271     | 4510002810 | Electrolytic 16 SS 47 µF               |
| C272     | 4530000350 | Capacitor Array B8ZC0111-32N           |
| C273     | 4510001160 | Electrolytic 50 MS7 1 µF               |
| C274     | 4010000460 | Ceramic DD104 B 471K 50V               |
| C275     | 4010000520 | Ceramic DD108 B 472K 50V               |
| C276     | 4510001770 | Electrolytic 16 RBP 10 µF              |
| C277     | 4510002740 | Electrolytic 10 SS 220 µF              |
| C278     | 4510001190 | Electrolytic 50 MS7 4R7 µF             |
| C279     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C280     | 4040000150 | Barrier Layer UAT 05X 472K             |
| C281     | 4010000240 | Ceramic DD104 SL 390J 50V              |
| C282     | 4010000160 | Ceramic DD104 SL 180J 50V              |
| C283     | 4510001150 | Electrolytic 50 MS7 R47 µF             |
| C284     | 4010000520 | Ceramic DD108 B 472K 50V               |

[MAIN UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                |
|----------|------------|----------------------------|
| C285     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C286     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C287     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C288     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C289     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C290     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C291     | 4010000430 | Ceramic DD109 SL 471J 50V  |
| C292     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C293     | 4510001140 | Electrolytic 50 MS7 R22 µF |
| C294     | 4610001200 | Trimmer CVSSE3001          |
| C295     | 4010000500 | Ceramic DD104 B 102K 50V   |
| C297     | 4040000250 | Barrier Layer UAT 08X 473M |
| C298     | 4040000260 | Barrier Layer UZE 08X 104M |
| C299     | 4040000260 | Barrier Layer UZE 08X 104M |
| C300     | 4040000250 | Barrier Layer UAT 08X 473M |
| C301     | 4010000520 | Ceramic DD108 B 472K 50V   |
| RL1      | 6330000180 | Relay MZ-12HG              |
| RL2      | 6330000560 | Relay OUC-SH-114D          |
| S2       | 2230000700 | Switch SPPJ31309A [BK IN]  |
| SO1      | 6510006640 | Switch 50864-1             |
| EP1      | 0910019635 | P.C. Board B 1788E         |

[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION           |
|----------|------------|-----------------------|
| IC1      | 1130000670 | IC µPD4071BC          |
| IC2      | 1130000970 | IC µPD4030BC          |
| IC3      | 1130003870 | IC GD4001B            |
| IC4      | 1130001270 | IC µPD4069UBC         |
| IC5      | 1130003890 | IC GD4024B            |
| IC6      | 1110000240 | IC BA222-V            |
| IC7      | 1110001680 | IC S-8054ALB          |
| IC8      | 1140000910 | IC HD63A01Y0G83P      |
| IC9      | 1120000970 | IC M54562P            |
| IC10     | 1180000340 | IC TA78005AP          |
| IC11     | 1130001360 | IC TC4021BP           |
| IC12     | 1130003860 | IC MB4052M-G          |
| IC13     | 1130002960 | IC TC9181P            |
| IC14     | 1120001620 | IC M74ALS74AP         |
| IC15     | 1120001620 | IC M74ALS74AP         |
| IC16     | 1110001320 | IC µPC1037HA          |
| IC17     | 1110001320 | IC µPC1037HA          |
| Q1       | 1530000110 | Transistor 2SC2458-GR |
| Q2       | 1530000110 | Transistor 2SC2458-GR |
| Q3       | 1530000110 | Transistor 2SC2458-GR |
| Q4       | 1530000110 | Transistor 2SC2458-GR |
| Q5       | 1530000110 | Transistor 2SC2458-GR |
| Q6       | 1530000110 | Transistor 2SC2458-GR |
| Q7       | 1530000110 | Transistor 2SC2458-GR |
| Q8       | 1530000110 | Transistor 2SC2458-GR |
| Q9       | 1530000110 | Transistor 2SC2458-GR |
| Q10      | 1530000110 | Transistor 2SC2458-GR |
| Q11      | 1530000110 | Transistor 2SC2458-GR |
| Q12      | 1530000940 | Transistor 2SC1571G   |
| Q13      | 1530000110 | Transistor 2SC2458-GR |
| Q14      | 1530000110 | Transistor 2SC2458-GR |



[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |            |
|----------|------------|-------------|------------|
| Q15      | 1560000090 | FET         | 2SK192A-GR |
| Q16      | 1530000110 | Transistor  | 2SC2458-GR |
| Q17      | 1560000090 | FET         | 2SK192A-GR |
| Q18      | 1530000110 | Transistor  | 2SC2458-GR |
| Q19      | 1560000090 | FET         | 2SK192A-GR |
| Q20      | 1530000110 | Transistor  | 2SC2458-GR |
| Q21      | 1560000090 | FET         | 2SK192A-GR |
| Q22      | 1530000110 | Transistor  | 2SC2458-GR |
| Q23      | 1530000150 | Transistor  | 2SC2668-O  |
| Q24      | 1530000150 | Transistor  | 2SC2668-O  |
| Q25      | 1590000340 | Transistor  | RN1202     |
| Q26      | 1530000150 | Transistor  | 2SC2668-O  |
| Q27      | 1530000150 | Transistor  | 2SC2668-O  |
| Q29      | 1560000090 | FET         | 2SK192A-GR |
| Q30      | 1530000150 | Transistor  | 2SC2668-O  |
| Q31      | 1590000360 | Transistor  | RN2202     |
| Q32      | 1530000100 | Transistor  | 2SC2458-Y  |
| Q33      | 1530000110 | Transistor  | 2SC2458-GR |
| Q34      | 1530000150 | Transistor  | 2SC2668-O  |
| Q35      | 1590000340 | Transistor  | RN1202     |
| Q36      | 1530000150 | Transistor  | 2SC2668-O  |
| Q37      | 1510000080 | Transistor  | 2SA1048-GR |
|          |            |             |            |
| D1       | 1710000160 | Diode       | 1SS133     |
| D3       | 1710000160 | Diode       | 1SS133     |
| D4       | 1710000160 | Diode       | 1SS133     |
| D5       | 1710000160 | Diode       | 1SS133     |
| D8       | 1710000160 | Diode       | 1SS133     |
| D9       | 1710000160 | Diode       | 1SS133     |
| D10      | 1730000100 | Zener       | RD5.1E B2  |
| D11      | 1710000160 | Diode       | 1SS133     |
| D12      | 1710000160 | Diode       | 1SS133     |
| D13      | 1710000160 | Diode       | 1SS133     |
| D14      | 1710000160 | Diode       | 1SS133     |
| D15      | 1710000160 | Diode       | 1SS133     |
| D16      | 1710000160 | Diode       | 1SS133     |
| D17      | 1710000160 | Diode       | 1SS133     |
| D18      | 1710000160 | Diode       | 1SS133     |
| D19      | 1710000160 | Diode       | 1SS133     |
| D20      | 1710000160 | Diode       | 1SS133     |
| D21      | 1710000160 | Diode       | 1SS133     |
| D22      | 1710000160 | Diode       | 1SS133     |
| D23      | 1710000160 | Diode       | 1SS133     |
| D24      | 1710000160 | Diode       | 1SS133     |
| D25      | 1710000160 | Diode       | 1SS133     |
| D26      | 1710000160 | Diode       | 1SS133     |
| D27      | 1710000160 | Diode       | 1SS133     |
| D28      | 1710000160 | Diode       | 1SS133     |
| D29      | 1710000050 | Diode       | 1SS53      |
| D30      | 1710000050 | Diode       | 1SS53      |
| D31      | 1710000050 | Diode       | 1SS53      |
| D32      | 1710000050 | Diode       | 1SS53      |
| D33      | 1710000050 | Diode       | 1SS53      |
| D34      | 1710000050 | Diode       | 1SS53      |
| D35      | 1710000160 | Diode       | 1SS133     |
| D36      | 1710000160 | Diode       | 1SS133     |
| D37      | 1710000160 | Diode       | 1SS133     |
| D38      | 1710000160 | Diode       | 1SS133     |
| D39      | 1710000160 | Diode       | 1SS133     |
| D40      | 1710000160 | Diode       | 1SS133     |
| D41      | 1710000160 | Diode       | 1SS133     |
| D42      | 1710000160 | Diode       | 1SS133     |
| D43      | 1710000040 | Diode       | 1S953      |
| D44      | 1710000050 | Diode       | 1SS53      |
| D45      | 1710000160 | Diode       | 1SS133     |
| D46      | 1710000160 | Diode       | 1SS133     |
| D47      | 1710000050 | Diode       | 1SS53      |
| D48      | 1720000050 | Varicap     | 1SV50E     |
| D49      | 1710000050 | Diode       | 1SS53      |
| D50      | 1720000050 | Varicap     | 1SV50E     |
| D51      | 1710000050 | Diode       | 1SS53      |
| D52      | 1720000050 | Varicap     | 1SV50E     |
| D53      | 1710000050 | Diode       | 1SS53      |
| D54      | 1720000050 | Varicap     | 1SV50E     |

[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                 |
|----------|------------|-------------|-----------------|
| D55      | 1710000050 | Diode       | 1SS53           |
| D56      | 1720000050 | Varicap     | 1SV50E          |
| D60      | 1710000160 | Diode       | 1SS133          |
| D62      | 1710000160 | Diode       | 1SS133          |
| D64      | 1710000160 | Diode       | 1SS133          |
| D65      | 1710000050 | Diode       | 1SS53           |
|          |            |             |                 |
| X1       | 6060000120 | Crystal     | CSA4.91MG       |
| X2       | 6050001520 | Crystal     | CR-21           |
|          |            |             |                 |
| L1       | 6180000880 | Coil        | LAL 03NA 100K   |
| L2       | 6140000580 | Coil        | LR-79           |
| L3       | 6130000990 | Coil        | LB-135          |
| L4       | 6170000180 | Coil        | LW-19           |
| L5       | 6140000580 | Coil        | LR-79           |
| L6       | 6130000990 | Coil        | LB-135          |
| L7       | 6170000180 | Coil        | LW-19           |
| L8       | 6140000580 | Coil        | LR-79           |
| L9       | 6130000990 | Coil        | LB-135          |
| L10      | 6170000180 | Coil        | LW-19           |
| L11      | 6140000580 | Coil        | LR-79           |
| L12      | 6130000990 | Coil        | LB-135          |
| L13      | 6170000180 | Coil        | LW-19           |
| L14      | 6180000900 | Coil        | LAL 03NA 101K   |
| L15      | 6180000900 | Coil        | LAL 03NA 101K   |
| L16      | 6180000740 | Coil        | LAL 03NA R56M   |
| L17      | 6110001560 | Coil        | LA-236          |
| L18      | 6110001560 | Coil        | LA-236          |
| L19      | 6110001550 | Coil        | LA-235          |
| L20      | 6180000900 | Coil        | LAL 03NA 101K   |
| L22      | 6180000880 | Coil        | LAL 03NA 100K   |
| L23      | 6180000720 | Coil        | LAL 03NA R39M   |
| L24      | 6180000700 | Coil        | LAL 03NA R27M   |
| L25      | 6180000690 | Coil        | LAL 03NA R22M   |
| L26      | 6180000960 | Coil        | LAL 03NA 102K   |
| L27      | 6180000900 | Coil        | LAL 03NA 101K   |
| L28      | 6180000900 | Coil        | LAL 03NA 101K   |
| L29      | 6180000900 | Coil        | LAL 03NA 101K   |
| L30      | 6110001650 | Coil        | LA-248          |
| L31      | 6170000180 | Coil        | LW-19           |
| L32      | 6180000850 | Coil        | LAL 03NA 4R7K   |
| L33      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L34      | 6170000180 | Coil        | LW-19           |
| L35      | 6150000760 | Coil        | LS-94           |
| L36      | 6180000900 | Coil        | LAL 03NA 101K   |
| L37      | 6180000900 | Coil        | LAL 03NA 101K   |
| L38      | 6150000990 | Coil        | LS-114          |
| L39      | 6150000990 | Coil        | LS-114          |
| L40      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L41      | 6110001640 | Coil        | LA-247          |
| L42      | 6180000880 | Coil        | LAL 03NA 100K   |
| L43      | 6180000900 | Coil        | LAL 03NA 101K   |
| L44      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L45      | 6180000960 | Coil        | LAL 03NA 102K   |
| L46      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L47      | 6180000900 | Coil        | LAL 03NA 101K   |
| L48      | 6180000960 | Coil        | LAL 03NA 102K   |
| L49      | 6110001560 | Coil        | LA-236          |
| L50      | 6180000960 | Coil        | LAL 03NA 102K   |
| L51      | 6180000960 | Coil        | LAL 03NA 102K   |
|          |            |             |                 |
| R1       | 7010003780 | Resistor    | ELR20J 1 MΩ     |
| R2       | 7010003550 | Resistor    | ELR20J 15 kΩ    |
| R3       | 7010004320 | Resistor    | R20J 10 kΩ      |
| R4       | 7010003810 | Resistor    | ELR20J 2.2 MΩ   |
| R5       | 7010003780 | Resistor    | ELR20J 1 MΩ     |
| R6       | 7010003550 | Resistor    | ELR20J 15 kΩ    |
| R7       | 7010001400 | Resistor    | R25J 100 kΩ     |
| R8       | 7010003700 | Resistor    | ELR20J 220 kΩ   |
| R9       | 7010003660 | Resistor    | ELR20J 100 kΩ   |
| R10      | 7010003700 | Resistor    | ELR20J 220 kΩ   |
| R11      | 7010003660 | Resistor    | ELR20J 100 kΩ   |

## [PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                           |
|----------|------------|---------------------------------------|
| R12      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R13      | 7010004320 | Resistor R20J 10 kΩ                   |
| R14      | 7010001280 | Resistor R25J 10 kΩ                   |
| R15      | 7010004210 | Resistor R20J 1.5 kΩ                  |
| R16      | 7010003530 | Resistor ELR20J 10 kΩ                 |
| R17      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R18      | 7010004450 | Resistor R20J 100 kΩ                  |
| R19      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R20      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R21      | 7010004320 | Resistor R20J 10 kΩ                   |
| R22      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R23      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R24      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R25      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R26      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R27      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R28      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R29      | 7010001150 | Resistor R25J 1 kΩ                    |
| R30      | 7010001150 | Resistor R25J 1 kΩ                    |
| R31      | 7010001150 | Resistor R25J 1 kΩ                    |
| R32      | 7010001150 | Resistor R25J 1 kΩ                    |
| R33      | 7010001150 | Resistor R25J 1 kΩ                    |
| R34      | 7010001150 | Resistor R25J 1 kΩ                    |
| R35      | 7010005230 | Resistor ELR20J 750 Ω                 |
| R36      | 7010003430 | Resistor ELR20J 1.8 kΩ                |
| R37      | 7010003460 | Resistor ELR20J 3.3 kΩ                |
| R38      | 7010003490 | Resistor ELR20J 5.6 kΩ                |
| R39      | 7010003530 | Resistor ELR20J 10 kΩ                 |
| R40      | 7010003480 | Resistor ELR20J 4.7 kΩ                |
| R41      | 7010004190 | Resistor R20J 1 kΩ                    |
| R42      | 7010004190 | Resistor R20J 1 kΩ                    |
| R43      | 7010001150 | Resistor R25J 1 kΩ                    |
| R44      | 7010001150 | Resistor R25J 1 kΩ                    |
| R45      | 7010001150 | Resistor R25J 1 kΩ                    |
| R46      | 7010001150 | Resistor R25J 1 kΩ                    |
| R47      | 7010001150 | Resistor R25J 1 kΩ                    |
| R48      | 7010001150 | Resistor R25J 1 kΩ                    |
| R49      | 7010004670 | Resistor R50XJ 22 Ω                   |
| R50      | 7010003530 | Resistor ELR20J 10 kΩ                 |
| R51      | 7010003240 | Resistor ELR20J 47 Ω                  |
| R52      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R53      | 7010003530 | Resistor ELR20J 10 kΩ                 |
| R54      | 7010004030 | Resistor R20J 47 Ω                    |
| R55      | 7010003480 | Resistor ELR20J 4.7 kΩ                |
| R56      | 7010003440 | Resistor ELR20J 2.2 kΩ                |
| R57      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R58      | 7010003620 | Resistor ELR20J 47 kΩ                 |
| R59      | 7010004410 | Resistor R20J 47 kΩ                   |
| R60      | 7010001400 | Resistor R25J 100 kΩ                  |
| R61      | 7010004410 | Resistor R20J 47 kΩ                   |
| R62      | 7010004410 | Resistor R20J 47 kΩ                   |
| R63      | 7010004410 | Resistor R20J 47 kΩ                   |
| R64      | 7010004410 | Resistor R20J 47 kΩ                   |
| R65      | 7010001360 | Resistor R25J 47 kΩ                   |
| R66      | 7410000180 | Resistor Array RMX-8 103K             |
| R67      | 7010003530 | Resistor ELR20J 10 kΩ                 |
| R68      | 7010004410 | Resistor R20J 47 kΩ                   |
| R69      | 7010003640 | Resistor ELR20J 68 kΩ                 |
| R70      | 7210001530 | Variable Resistor RK09K1110AEGA (RIT) |
| R71      | 7010003460 | Resistor ELR20J 3.3 kΩ                |
| R72      | 7010004070 | Resistor R20J 100 Ω                   |
| R73      | 7010004670 | Resistor R50XJ 22 Ω                   |
| R74      | 7010003400 | Resistor ELR20J 1 kΩ                  |
| R75      | 7010003700 | Resistor ELR20J 220 kΩ                |
| R76      | 7010003440 | Resistor ELR20J 2.2 kΩ                |
| R77      | 7010001150 | Resistor R25J 1 kΩ                    |
| R78      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R79      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R80      | 7010001060 | Resistor R25J 180 Ω                   |
| R81      | 7010004090 | Resistor R20J 150 Ω                   |
| R82      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R83      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R84      | 7010003310 | Resistor ELR20J 180 Ω                 |
| R85      | 7010003660 | Resistor ELR20J 100 kΩ                |
| R86      | 7010004450 | Resistor R20J 100 kΩ                  |

## [PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION            |
|----------|------------|------------------------|
| R87      | 7010003310 | Resistor ELR20J 180 Ω  |
| R88      | 7010003660 | Resistor ELR20J 100 kΩ |
| R89      | 7010003660 | Resistor ELR20J 100 kΩ |
| R90      | 7010003310 | Resistor ELR20J 180 Ω  |
| R91      | 7010004090 | Resistor R20J 150 Ω    |
| R92      | 7010004250 | Resistor R20J 3.3 kΩ   |
| R93      | 7010004090 | Resistor R20J 150 Ω    |
| R94      | 7010004250 | Resistor R20J 3.3 kΩ   |
| R95      | 7010003300 | Resistor ELR20J 150 Ω  |
| R96      | 7010004250 | Resistor R20J 3.3 kΩ   |
| R97      | 7010003300 | Resistor ELR20J 150 Ω  |
| R98      | 7010003460 | Resistor ELR20J 3.3 kΩ |
| R99      | 7010003780 | Resistor ELR20J 1 MΩ   |
| R100     | 7010003780 | Resistor ELR20J 1 MΩ   |
| R101     | 7010003360 | Resistor ELR20J 470 Ω  |
| R102     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R103     | 7010000990 | Resistor R25J 47 Ω     |
| R104     | 7010003480 | Resistor ELR20J 4.7 kΩ |
| R105     | 7010004110 | Resistor R20J 220 Ω    |
| R106     | 7010003340 | Resistor ELR20J 330 Ω  |
| R107     | 7010003990 | Resistor R20J 22 Ω     |
| R108     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R109     | 7010003580 | Resistor ELR20J 22 kΩ  |
| R110     | 7010004070 | Resistor R20J 100 Ω    |
| R111     | 7010003200 | Resistor ELR20J 22 Ω   |
| R112     | 7010003320 | Resistor ELR20J 220 Ω  |
| R113     | 7010003330 | Resistor ELR20J 270 Ω  |
| R114     | 7010003980 | Resistor R20J 18 Ω     |
| R115     | 7010003330 | Resistor ELR20J 270 Ω  |
| R116     | 7010001150 | Resistor R25J 1 kΩ     |
| R117     | 7010001150 | Resistor R25J 1 kΩ     |
| R118     | 7010004190 | Resistor R20J 1 kΩ     |
| R119     | 7010001070 | Resistor R25J 220 Ω    |
| R121     | 7010003480 | Resistor ELR20J 4.7 kΩ |
| R123     | 7010003280 | Resistor ELR20J 100 Ω  |
| R124     | 7010004150 | Resistor R20J 470 Ω    |
| R125     | 7010003620 | Resistor ELR20J 47 kΩ  |
| R126     | 7010003420 | Resistor ELR20J 1.5 kΩ |
| R127     | 7010004110 | Resistor R20J 220 Ω    |
| R128     | 7010003360 | Resistor ELR20J 470 Ω  |
| R129     | 7010004110 | Resistor R20J 220 Ω    |
| R130     | 7010001150 | Resistor R25J 1 kΩ     |
| R131     | 7010004190 | Resistor R20J 1 kΩ     |
| R132     | 7010004190 | Resistor R20J 1 kΩ     |
| R133     | 7010001230 | Resistor R25J 4.7 kΩ   |
| R134     | 7010003160 | Resistor ELR20J 10 Ω   |
| R136     | 7010003580 | Resistor ELR20J 22 kΩ  |
| R137     | 7010003660 | Resistor ELR20J 100 kΩ |
| R138     | 7010004090 | Resistor R20J 150 Ω    |
| R139     | 7010003440 | Resistor ELR20J 2.2 kΩ |
| R140     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R141     | 7010003480 | Resistor ELR20J 4.7 kΩ |
| R142     | 7010003340 | Resistor ELR20J 330 Ω  |
| R143     | 7010004110 | Resistor R20J 220 Ω    |
| R144     | 7010003280 | Resistor ELR20J 100 Ω  |
| R145     | 7010003240 | Resistor ELR20J 47 Ω   |
| R146     | 7010003280 | Resistor ELR20J 100 Ω  |
| R147     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R149     | 7010004070 | Resistor R20J 100 Ω    |
| R150     | 7010004190 | Resistor R20J 1 kΩ     |
| R151     | 7010003600 | Resistor ELR20J 33 kΩ  |
| R152     | 7010003440 | Resistor ELR20J 2.2 kΩ |
| R153     | 7010003280 | Resistor ELR20J 100 Ω  |
| R155     | 7010004190 | Resistor R20J 1 kΩ     |
| R156     | 7010003480 | Resistor ELR20J 4.7 kΩ |
| R157     | 7010003550 | Resistor ELR20J 15 kΩ  |
| R158     | 7010003360 | Resistor ELR20J 470 Ω  |
| R159     | 7010003240 | Resistor ELR20J 47 Ω   |
| R160     | 7010003320 | Resistor ELR20J 220 Ω  |
| R161     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R162     | 7010003410 | Resistor ELR20J 1.2 kΩ |
| R163     | 7010003530 | Resistor ELR20J 10 kΩ  |
| R164     | 7010004370 | Resistor R20J 22 kΩ    |
| R165     | 7010003300 | Resistor ELR20J 150 Ω  |
| R166     | 7010001030 | Resistor R25J 100 Ω    |

[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                  |
|----------|------------|------------------------------|
| R167     | 7010003530 | Resistor ELR20J 10 kΩ        |
| R168     | 7010003530 | Resistor ELR20J 10 kΩ        |
| R169     | 7010003530 | Resistor ELR20J 10 kΩ        |
| R170     | 7010003530 | Resistor ELR20J 10 kΩ        |
| R171     | 7010003620 | Resistor ELR20J 47 kΩ        |
| R172     | 7010004410 | Resistor R20J 47 kΩ          |
| R173     | 7010004150 | Resistor R20J 470 Ω          |
| R174     | 7010004320 | Resistor R20J 10 kΩ          |
| R175     | 7010004190 | Resistor R20J 1 kΩ           |
| R176     | 7010003360 | Resistor ELR20J 470 Ω        |
| R177     | 7010003360 | Resistor ELR20J 470 Ω        |
| R178     | 7010003360 | Resistor ELR20J 470 Ω        |
| R179     | 7010003400 | Resistor ELR20J 1 kΩ         |
| R180     | 7010003460 | Resistor ELR20J 3.3 kΩ       |
| R181     | 7010003760 | Resistor ELR20J 680 kΩ       |
| R182     | 7010004320 | Resistor R20J 10 kΩ          |
|          |            |                              |
| C1       | 4010000500 | Ceramic DD104 B 102K 50V     |
| C2       | 4010000500 | Ceramic DD104 B 102K 50V     |
| C3       | 4510001150 | Electrolytic 50 MS7 R47 μF   |
| C4       | 4010000520 | Ceramic DD108 B 472K 50V     |
| C5       | 4010000500 | Ceramic DD104 B 102K 50V     |
| C6       | 4010000500 | Ceramic DD104 B 102K 50V     |
| C8       | 4020000400 | Cylinder UP050 B 102K        |
| C9       | 4310000010 | Mylar F2D 50V 102K           |
| C10      | 4510001100 | Electrolytic 16 MS7 10 μF    |
| C11      | 4510001100 | Electrolytic 16 MS7 10 μF    |
| C12      | 4550000350 | Tantalum DN 1V 010M          |
| C13      | 4550000400 | Tantalum DN 1C 2R2M          |
| C14      | 4040000260 | Barrier Layer UZE 08X 104M   |
| C15      | 4010000810 | Ceramic DD105 CH 300J 50V    |
| C16      | 4010000810 | Ceramic DD105 CH 300J 50V    |
| C17      | 4550000400 | Tantalum DN 1C 2R2M          |
| C18      | 4510002640 | Electrolytic 25 SS 47 μF     |
| C19      | 4040000260 | Barrier Layer UZE 08X 104M   |
| C20      | 4510003040 | Electrolytic 16 SS 100 μF    |
| C21      | 4530000150 | Capacitor Array B7ZC0711-32N |
| C22      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C23      | 4530000270 | Capacitor Array B8XC0114-32N |
| C24      | 4040000250 | Barrier Layer UAT 08X 473M   |
| C25      | 4040000260 | Barrier Layer UZE 08X 104M   |
| C26      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C27      | 4510003040 | Electrolytic 16 SS 100 μF    |
| C28      | 4010000500 | Ceramic DD104 B 102K 50V     |
| C29      | 4510001750 | Electrolytic 50 RBP 2.2 μF   |
| C31      | 4010003460 | Ceramic DD104 UJ 330J 50V    |
| C32      | 4040000250 | Barrier Layer UAT 08X 473M   |
| C33      | 4010000940 | Ceramic DD107 CH 101J 50V    |
| C34      | 4010000770 | Ceramic DD104 CH 200J 50V    |
| C35      | 4610001130 | Trimmer CVSSA1001            |
| C36      | 4010000900 | Ceramic DD107 CH 680J 50V    |
| C37      | 4510002640 | Electrolytic 25 SS 47 μF     |
| C38      | 4010000720 | Ceramic DD104 CH 120J 50V    |
| C39      | 4010000720 | Ceramic DD104 CH 120J 50V    |
| C40      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C41      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C42      | 4010000020 | Ceramic DD104 SL 010C 50V    |
| C43      | 4010000500 | Ceramic DD104 B 102K 50V     |
| C44      | 4010000900 | Ceramic DD107 CH 680J 50V    |
| C45      | 4010000740 | Ceramic DD104 CH 150J 50V    |
| C46      | 4610001130 | Trimmer CVSSA1001            |
| C47      | 4010000860 | Ceramic DD106 CH 470J 50V    |
| C48      | 4510002640 | Electrolytic 25 SS 47 μF     |
| C49      | 4010000720 | Ceramic DD104 CH 120J 50V    |
| C50      | 4010000720 | Ceramic DD104 CH 120J 50V    |
| C51      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C52      | 4010000520 | Ceramic DD108 B 472K 50V     |
| C53      | 4010000020 | Ceramic DD104 SL 010C 50V    |
| C54      | 4010000260 | Ceramic DD104 SL 470J 50V    |
| C55      | 4010000270 | Ceramic DD104 SL 510J 50V    |
| C56      | 4010000500 | Ceramic DD104 B 102K 50V     |
| C57      | 4010000870 | Ceramic DD106 CH 510J 50V    |
| C58      | 4010000700 | Ceramic DD104 CH 100D 50V    |
| C59      | 4610001000 | Trimmer CVSSA0701            |

[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION                |
|----------|------------|----------------------------|
| C60      | 4010000860 | Ceramic DD106 CH 470J 50V  |
| C61      | 4510002640 | Electrolytic 25 SS 47 μF   |
| C62      | 4010000680 | Ceramic DD104 CH 080D 50V  |
| C63      | 4010000720 | Ceramic DD104 CH 120J 50V  |
| C64      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C65      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C66      | 4010000020 | Ceramic DD104 SL 010C 50V  |
| C67      | 4010000500 | Ceramic DD104 B 102K 50V   |
| C68      | 4010000860 | Ceramic DD106 CH 470J 50V  |
| C69      | 4010000630 | Ceramic DD104 CJ 030C 50V  |
| C70      | 4610001000 | Trimmer CVSSA0701          |
| C71      | 4010000820 | Ceramic DD105 CH 330J 50V  |
| C72      | 4510002640 | Electrolytic 25 SS 47 μF   |
| C73      | 4010000660 | Ceramic DD104 CH 060D 50V  |
| C74      | 4010000720 | Ceramic DD104 CH 120J 50V  |
| C75      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C76      | 4040000260 | Barrier Layer UZE 08X 104M |
| C77      | 4510003040 | Electrolytic 16 SS 100 μF  |
| C78      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C79      | 4010000020 | Ceramic DD104 SL 010C 50V  |
| C80      | 4010000500 | Ceramic DD104 B 102K 50V   |
| C81      | 4010000260 | Ceramic DD104 SL 470J 50V  |
| C82      | 4040000150 | Barrier Layer UAT 05X 472K |
| C83      | 4010000460 | Ceramic DD104 B 471K 50V   |
| C84      | 4040000250 | Barrier Layer UAT 08X 473M |
| C85      | 4010000380 | Ceramic DD107 SL 221J 50V  |
| C86      | 4010000500 | Ceramic DD104 B 102K 50V   |
| C87      | 4010000240 | Ceramic DD104 SL 390J 50V  |
| C88      | 4010000150 | Ceramic DD104 SL 150J 50V  |
| C89      | 4010000240 | Ceramic DD104 SL 390J 50V  |
| C90      | 4010000160 | Ceramic DD104 SL 180J 50V  |
| C91      | 4010000200 | Ceramic DD104 SL 270J 50V  |
| C92      | 4010000230 | Ceramic DD104 SL 360J 50V  |
| C93      | 4010000180 | Ceramic DD104 SL 220J 50V  |
| C94      | 4010000120 | Ceramic DD104 SL 100D 50V  |
| C95      | 4040000150 | Barrier Layer UAT 05X 472K |
| C96      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C97      | 4040000150 | Barrier Layer UAT 05X 472K |
| C98      | 4010000520 | Ceramic DD108 B 472K 50V   |
| C99      | 4010000300 | Ceramic DD104 SL 680J 50V  |
| C100     | 4010000080 | Ceramic DD104 SL 060D 50V  |
| C101     | 4010000320 | Ceramic DD104 SL 820J 50V  |
| C102     | 4010000160 | Ceramic DD104 SL 180J 50V  |
| C103     | 4010000310 | Ceramic DD104 SL 750J 50V  |
| C104     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C105     | 4040000260 | Barrier Layer UZE 08X 104M |
| C106     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C107     | 4040000250 | Barrier Layer UAT 08X 473M |
| C108     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C109     | 4010000460 | Ceramic DD104 B 471K 50V   |
| C110     | 4010000210 | Ceramic DD104 SL 300J 50V  |
| C111     | 4010000410 | Ceramic DD107 SL 331J 50V  |
| C112     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C113     | 4040000260 | Barrier Layer UZE 08X 104M |
| C114     | 4550000400 | Tantalum DN 1C 2R2M        |
| C115     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C116     | 4010000740 | Ceramic DD104 CH 150J 50V  |
| C117     | 4010000810 | Ceramic DD105 CH 300J 50V  |
| C118     | 4010000900 | Ceramic DD107 CH 680J 50V  |
| C119     | 4010000720 | Ceramic DD104 CH 120J 50V  |
| C120     | 4010000720 | Ceramic DD104 CH 120J 50V  |
| C121     | 4040000150 | Barrier Layer UAT 05X 472K |
| C122     | 4510001100 | Electrolytic 16 MS7 10 μF  |
| C123     | 4010000500 | Ceramic DD104 B 102K 50V   |
| C124     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C125     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C126     | 4010000380 | Ceramic DD107 SL 221J 50V  |
| C127     | 4040000260 | Barrier Layer UZE 08X 104M |
| C128     | 4040000260 | Barrier Layer UZE 08X 104M |
| C129     | 4010000520 | Ceramic DD108 B 472K 50V   |
| C130     | 4020000400 | Cylinder UP050 B 102K      |
| C131     | 4040000260 | Barrier Layer UZE 08X 104M |
| C132     | 4510002640 | Electrolytic 25 SS 47 μF   |
| C133     | 4010000270 | Ceramic DD104 SL 510J 50V  |
| C134     | 4610001120 | Trimmer CVSSC2001          |

[PLL UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION     |                           |
|----------|------------|-----------------|---------------------------|
| C135     | 4010003100 | Ceramic         | DD106 TH 820J 50V         |
| C136     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C137     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C138     | 4010003100 | Ceramic         | DD106 TH 820J 50V         |
| C139     | 4550000320 | Tantalum        | DN 1V 0R1M                |
| C140     | 4040000150 | Barrier Layer   | UAT 05X 472K              |
| C141     | 4010000500 | Ceramic         | DD104 B 102K 50V          |
| C142     | 4010000500 | Ceramic         | DD104 B 102K 50V          |
| C143     | 4010000500 | Ceramic         | DD104 B 102K 50V          |
| C144     | 4010000380 | Ceramic         | DD107 SL 221J 50V         |
| C145     | 4040000260 | Barrier Layer   | UZE 08X 104M              |
| C146     | 4010000100 | Ceramic         | DD104 SL 080D 50V         |
| C147     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C148     | 4010000010 | Ceramic         | DD104 SL 0R5C 50V         |
| C149     | 4010000100 | Ceramic         | DD104 SL 080D 50V         |
| C150     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C151     | 4040000260 | Barrier Layer   | UZE 08X 104M              |
| C152     | 4040000260 | Barrier Layer   | UZE 08X 104M              |
| C153     | 4510000310 | Electrolytic    | 16 MS16 1000 µF (12.5X16) |
| C154     | 4040000190 | Barrier Layer   | UAT 05X 103K              |
| C155     | 4040000190 | Barrier Layer   | UAT 05X 103K              |
| C156     | 4040000190 | Barrier Layer   | UAT 05X 103K              |
| C157     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C158     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C159     | 4010000520 | Ceramic         | DD108 B 472K 50V          |
| C160     | 4020000180 | Cylinder        | UP125 B 471K              |
| C161     | 4040000190 | Barrier Layer   | UAT 05X 103K              |
| C162     | 4010000210 | Ceramic         | DD104 SL 300J 50V         |
| C163     | 4010000180 | Ceramic         | DD104 SL 220J 50V         |
| C164     | 4010000210 | Ceramic         | DD104 SL 300J 50V         |
| C165     | 4020000260 | Cylinder        | TP125 X 103M              |
| C166     | 4040000250 | Barrier Layer   | UAT 08X 473M              |
| C167     | 4040000250 | Barrier Layer   | UAT 08X 473M              |
| C168     | 4040000250 | Barrier Layer   | UAT 08X 473M              |
| BT1      | 3020000020 | Lithium Battery | BR2032-1T2                |
| EP1      | 6910000600 | Ferrite Bead    | FSOH050RN                 |
| EP2      | 0910019436 | P.C. Board      | B 1789F                   |

[DDS UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION    |                        |
|----------|------------|----------------|------------------------|
| IC1      | 1140000500 | IC             | SC1051                 |
| IC2      | 1130002600 | IC             | SC1052                 |
| IC3      | 1130002610 | IC             | SC1053                 |
| IC4      | 1130002460 | IC             | TC74HCT374F            |
| IC5      | 1130002460 | IC             | TC74HCT374F            |
| X1       | 6050003230 | Crystal        | CR-180                 |
| L1       | 6200000040 | Coil           | LQN 5N 331K            |
| L2       | 6200000040 | Coil           | LQN 5N 331K            |
| L3       | 6200000040 | Coil           | LQN 5N 331K            |
| R1       | 7030000740 | Resistor       | MCR10EZHZ 1 MΩ (105)   |
| R2       | 7030000360 | Resistor       | MCR10EZHZ 680 Ω (681)  |
| R3       | 7030000420 | Resistor       | MCR10EZHZ 2.2 kΩ (222) |
| R4       | 7410000320 | Resistor Array | GF 5096                |
| R5       | 7030000500 | Resistor       | MCR10EZHZ 10 kΩ (103)  |
| R6       | 7030000500 | Resistor       | MCR10EZHZ 10 kΩ (103)  |
| R7       | 7030000500 | Resistor       | MCR10EZHZ 10 kΩ (103)  |

[DDS UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                    |
|----------|------------|-------------|--------------------|
| C1       | 4610000520 | Trimmer     | TZB04N100BA006     |
| C2       | 4030000950 | Ceramic     | GRM40 CH 330J 50PT |
| C3       | 4030001150 | Ceramic     | GRM40 F 104Z 25PT  |
| C7       | 4030000720 | Ceramic     | GRM40 SL 680J 50PT |
| C8       | 4030000560 | Ceramic     | GRM40 SL 020C 50PT |
| C9       | 4030000750 | Ceramic     | GRM40 SL 121J 50PT |
| C10      | 4030000610 | Ceramic     | GRM40 SL 070D 50PT |
| C11      | 4030000750 | Ceramic     | GRM40 SL 121J 50PT |
| C12      | 4030000640 | Ceramic     | GRM40 SL 120J 50PT |
| C13      | 4030000720 | Ceramic     | GRM40 SL 680J 50PT |
| C14      | 4030001150 | Ceramic     | GRM40 F 104Z 25PT  |
| C15      | 4030001150 | Ceramic     | GRM40 F 104Z 25PT  |
| C16      | 4030001150 | Ceramic     | GRM40 F 104Z 25PT  |
| C17      | 4030001150 | Ceramic     | GRM40 F 104Z 25PT  |
| C18      | 4030002430 | Ceramic     | GRM40 TH 220J 50PT |
| C19      | 4030001100 | Ceramic     | GRM40 B 102K 50PT  |
| C20      | 4030001100 | Ceramic     | GRM40 B 102K 50PT  |
| EP1      | 0910022511 | P.C. Board  | B 2203A            |

[PA UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                 |
|----------|------------|-------------|-----------------|
| Q1       | 1530000790 | Transistor  | 2SC1971         |
| Q2       | 1530000190 | Transistor  | 2SC3133         |
| Q3       | 1530000190 | Transistor  | 2SC3133         |
| Q4       | 1540000200 | Transistor  | 2SD1406 Y       |
| Q5       | 1530000200 | Transistor  | 2SC2904         |
| Q6       | 1530000200 | Transistor  | 2SC2904         |
| Q7       | 1520000060 | Transistor  | 2SB562C         |
| Q8       | 1590000340 | Transistor  | RN1202          |
| Q9       | 1590000340 | Transistor  | RN1202          |
| Q10      | 1590000360 | Transistor  | RN2202          |
| D1       | 1790000010 | Diode       | MV5             |
| D2       | 1790000010 | Diode       | MV5             |
| D3       | 1790000010 | Diode       | MV5             |
| D4       | 1710000010 | Diode       | 15CD11          |
| D5       | 1710000030 | Diode       | 1S1555          |
| D6       | 1710000030 | Diode       | 1S1555          |
| D7       | 1710000330 | Diode       | 1K60            |
| D8       | 1710000330 | Diode       | 1K60            |
| D9       | 1710000030 | Diode       | 1S1555          |
| D10      | 1710000030 | Diode       | 1S1555          |
| D11      | 1710000030 | Diode       | 1S1555          |
| D12      | 1710000030 | Diode       | 1S1555          |
| D13      | 1710000030 | Diode       | 1S1555          |
| D14      | 1710000030 | Diode       | 1S1555          |
| D15      | 1710000030 | Diode       | 1S1555          |
| L1       | 6140001170 | Coil        | LR-142          |
| L2       | 6910000670 | Coil        | BT01RN1-A61-001 |
| L3       | 6910000670 | Coil        | BT01RN1-A61-001 |
| L4       | 6140001300 | Coil        | LR-155          |
| L5       | 6140000610 | Coil        | LR-83           |
| L6       | 6140001310 | Coil        | LR-156          |
| L7       | 6140001210 | Coil        | LR-146          |
| L8       | 6180001230 | Coil        | LAL 04NA 8R2K   |
| L9       | 6180001570 | Coil        | LAL 04NA 4R7K   |
| L10      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L11      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L12      | 6180000880 | Coil        | LAL 03NA 100K   |
| L13      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L14      | 6910000670 | Coil        | BT01RN1-A61-001 |
| L15      | 6910000670 | Coil        | BT01RN1-A61-001 |

## [PA UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION |                          |
|----------|------------|-------------|--------------------------|
| L16      | 6910000670 | Coil        | BT01RN1-A61-001          |
| L17      | 6180000900 | Coil        | LAL 03NA 101K            |
| L18      | 6180000900 | Coil        | LAL 03NA 101K            |
| L25      | 6140001110 | Coil        | LR-136                   |
| L26      | 6140001120 | Coil        | LR-137                   |
| L27      | 6140001780 | Coil        | LR-214                   |
| L28      | 6140001790 | Coil        | LR-215                   |
| L29      | 6140001800 | Coil        | LR-216                   |
| L30      | 6140001800 | Coil        | LR-216                   |
| L31      | 6140001810 | Coil        | LR-217                   |
| L32      | 6140001820 | Coil        | LR-218                   |
| L33      | 6140001320 | Coil        | LR-157                   |
| L34      | 6140001330 | Coil        | LR-158                   |
| L35      | 6110001490 | Coil        | LA-196                   |
| L36      | 6110001500 | Coil        | LA-197                   |
| L37      | 6180000900 | Coil        | LAL 03NA 101K            |
| L38      | 6180000900 | Coil        | LAL 03NA 101K            |
| L39      | 6180000900 | Coil        | LAL 03NA 101K            |
| L40      | 6180000900 | Coil        | LAL 03NA 101K            |
| L41      | 6180000900 | Coil        | LAL 03NA 101K            |
| L42      | 6180000900 | Coil        | LAL 03NA 101K            |
| L43      | 6180000900 | Coil        | LAL 03NA 101K            |
| L44      | 6180000900 | Coil        | LAL 03NA 101K            |
| L45      | 6180000880 | Coil        | LAL 03NA 100K            |
| L46      | 6180000880 | Coil        | LAL 03NA 100K            |
| L47      | 6180000880 | Coil        | LAL 03NA 100K            |
| L48      | 6180000880 | Coil        | LAL 03NA 100K            |
| L49      | 6180000900 | Coil        | LAL 03NA 101K            |
| L50      | 6140001460 | Coil        | LR-170                   |
| L51      | 6140001340 | Coil        | LR-163                   |
| R1       | 7010000310 | Resistor    | ELR25J 330 Ω             |
| R2       | 7010001050 | Resistor    | R25J 150 Ω               |
| R3       | 7010000290 | Resistor    | ELR25J 220 Ω             |
| R4       | 7010000330 | Resistor    | ELR25J 470 Ω             |
| R5       | 7010004830 | Resistor    | R50XJ 4.7 Ω              |
| R6       | 7010004120 | Resistor    | R20J 270 Ω               |
| R7       | 7010004730 | Resistor    | R50XJ 120 Ω              |
| R8       | 7310000680 | Trimmer     | RH0651C12J04A (101)      |
| R9       | 7010000990 | Resistor    | R25J 47 Ω                |
| R10      | 7010000990 | Resistor    | R25J 47 Ω                |
| R11      | 7010004730 | Resistor    | R50XJ 120 Ω              |
| R12      | 7010004730 | Resistor    | R50XJ 120 Ω              |
| R13      | 7010004650 | Resistor    | R50XJ 10 Ω               |
| R14      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R15      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R16      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R17      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R18      | 7010004730 | Resistor    | R50XJ 120 Ω              |
| R19      | 7310000710 | Trimmer     | RH0651C13J1YA (102)      |
| R20      | 7010004650 | Resistor    | R50XJ 10 Ω               |
| R21      | 7010004650 | Resistor    | R50XJ 10 Ω               |
| R22      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R23      | 7080000650 | Resistor    | RSS1P 3R3 Ω              |
| R24      | 7070000250 | Resistor    | CRH200 R-02J 4.7 Ω (4R7) |
| R25      | 7010000370 | Resistor    | ELR25J 1 kΩ              |
| R26      | 7100000510 | Resistor    | CP-5AJ 0.012 Ω           |
| R27      | 7010000370 | Resistor    | ELR25J 1 kΩ              |
| R28      | 7010001090 | Resistor    | R25J 330 Ω               |
| R29      | 7010004150 | Resistor    | R20J 470 Ω               |
| R30      | 7010004190 | Resistor    | R20J 1 kΩ                |
| R31      | 7010003490 | Resistor    | ELR20J 5.6 kΩ            |
| R32      | 7510000070 | Thermistor  | ERT-D2FHL503S            |
| R33      | 7010003610 | Resistor    | ELR20J 39 kΩ             |
| R34      | 7010004020 | Resistor    | R20J 39 Ω                |
| R35      | 7010004060 | Resistor    | R20J 82 Ω                |
| R36      | 7010004270 | Resistor    | R20J 4.7 kΩ              |
| R37      | 7010003550 | Resistor    | ELR20J 15 kΩ             |
| R38      | 7010003660 | Resistor    | ELR20J 100 kΩ            |
| R39      | 7010004270 | Resistor    | R20J 4.7 kΩ              |
| R40      | 7010003550 | Resistor    | ELR20J 15 kΩ             |
| R41      | 7010003660 | Resistor    | ELR20J 100 kΩ            |
| R42      | 7540000010 | Absorber    | DSA-301LA                |
| R43      | 7010004390 | Resistor    | R20J 33 kΩ               |

## [PA UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION   |                              |
|----------|------------|---------------|------------------------------|
| R46      | 7010004310 | Resistor      | R20J 8.2 kΩ                  |
| R47      | 7010003520 | Resistor      | ELR20J 8.2 kΩ                |
| C1       | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C2       | 4010000510 | Ceramic       | DD106 B 222K 50V             |
| C3       | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C4       | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C5       | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C6       | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C7       | 4310000110 | Mylar         | F2D 50V 472K                 |
| C8       | 4310000110 | Mylar         | F2D 50V 472K                 |
| C9       | 4010000380 | Ceramic       | DD107 SL 221J 50V            |
| C10      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C11      | 4010000500 | Ceramic       | DD104 B 102K 50V             |
| C12      | 4030001370 | Ceramic       | GR44 CH 682K                 |
| C13      | 4030001370 | Ceramic       | GR44 CH 682K                 |
| C14      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C15      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C16      | 4510002720 | Electrolytic  | 10 SS 47 μF                  |
| C17      | 4030001340 | Ceramic       | GR44 CH 102K                 |
| C18      | 4010000420 | Ceramic       | DD108 SL 391J 50V            |
| C19      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C20      | 4320000220 | Dip Mica      | DM19C 681J5                  |
| C21      | 4030001340 | Ceramic       | GR44 CH 102K                 |
| C22      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C23      | 4510002640 | Electrolytic  | 25 SS 47 μF                  |
| C24      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C25      | 4510000310 | Electrolytic  | 16 MS16 1000 μF<br>(12.5X16) |
| C26      | 4040000260 | Barrier Layer | UZE 08X 104M                 |
| C27      | 4010000380 | Ceramic       | DD107 SL 221J 50V            |
| C28      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C29      | 4510000310 | Electrolytic  | 16 MS16 1000 μF<br>(12.5X16) |
| C30      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C31      | 4040000260 | Barrier Layer | UZE 08X 104M                 |
| C32      | 4010000380 | Ceramic       | DD107 SL 221J 50V            |
| C33      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C34      | 4510002780 | Electrolytic  | 16 SS 10 μF                  |
| C35      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C36      | 4510002440 | Electrolytic  | 16 SS 220 μF (8X11)          |
| C37      | 4040000250 | Barrier Layer | UAT 08X 473M                 |
| C38      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C39      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C40      | 4030001340 | Ceramic       | GR44 CH 102K                 |
| C41      | 4510002640 | Electrolytic  | 25 SS 47 μF                  |
| C42      | 4010000520 | Ceramic       | DD108 B 472K 50V             |
| C43      | 4320000290 | Dip Mica      | DM20C 152J5                  |
| C44      | 4010004040 | Ceramic       | DD10 SL 151K 500V            |
| C45      | 4010004100 | Ceramic       | DD14 SL 331K 500V            |
| C46      | 4320000330 | Dip Mica      | DM20C 272J5                  |
| C47      | 4010004030 | Ceramic       | DD10 SL 121K 500V            |
| C48      | 4320000290 | Dip Mica      | DM20C 152J5                  |
| C49      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C50      | 4010004050 | Ceramic       | DD12 SL 181K 500V            |
| C51      | 4010004040 | Ceramic       | DD10 SL 151K 500V            |
| C52      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C53      | 4320000280 | Dip Mica      | DM20C 122J5                  |
| C54      | 4010003990 | Ceramic       | DD09 SL 680K 500V            |
| C55      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C56      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C57      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C58      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C59      | 4010004050 | Ceramic       | DD12 SL 181K 500V            |
| C60      | 4010004010 | Ceramic       | DD09 SL 101K 500V            |
| C61      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C62      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C63      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C64      | 4010003950 | Ceramic       | DD06 SL 330K 500V            |
| C65      | 4010004070 | Ceramic       | DD12 SL 221K 500V            |
| C66      | 4010004050 | Ceramic       | DD12 SL 181K 500V            |
| C67      | 4010004030 | Ceramic       | DD10 SL 121K 500V            |
| C68      | 4010004000 | Ceramic       | DD09 SL 820K 500V            |
| C69      | 4010003930 | Ceramic       | DD06 SL 270K 500V            |

[PA UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION   |                      |
|----------|------------|---------------|----------------------|
| C70      | 4010004030 | Ceramic       | DD10 SL 121K 500V    |
| C71      | 4010004050 | Ceramic       | DD12 SL 181K 500V    |
| C72      | 4010003960 | Ceramic       | DD06 SL 390K 500V    |
| C73      | 4010004050 | Ceramic       | DD12 SL 181K 500V    |
| C74      | 4010004010 | Ceramic       | DD09 SL 101K 500V    |
| C75      | 4010003870 | Ceramic       | DD06 SL 120K 500V    |
| C76      | 4010004070 | Ceramic       | DD12 SL 221K 500V    |
| C77      | 4010003950 | Ceramic       | DD06 SL 330K 500V    |
| C78      | 4010004010 | Ceramic       | DD09 SL 101K 500V    |
| C79      | 4010003990 | Ceramic       | DD09 SL 680K 500V    |
| C80      | 4010003960 | Ceramic       | DD06 SL 390K 500V    |
| C81      | 4010004040 | Ceramic       | DD10 SL 151K 500V    |
| C82      | 4010003870 | Ceramic       | DD06 SL 120K 500V    |
| C83      | 4010003990 | Ceramic       | DD09 SL 680K 500V    |
| C84      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C85      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C86      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C87      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C88      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C89      | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C90      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C91      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C92      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C93      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C94      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C95      | 4010000520 | Ceramic       | DD108 B 472K 50V     |
| C96      | 4610001120 | Trimmer       | CVSSC2001            |
| C97      | 4010000410 | Ceramic       | DD107 SL 331J 50V    |
| C98      | 4010000410 | Ceramic       | DD107 SL 331J 50V    |
| C99      | 4010000430 | Ceramic       | DD109 SL 471J 50V    |
| C100     | 4010000430 | Ceramic       | DD109 SL 471J 50V    |
| C101     | 4040000250 | Barrier Layer | UAT 08X 473M         |
| C102     | 4010000330 | Ceramic       | DD105 SL 101J 50V    |
| C103     | 4010000120 | Ceramic       | DD104 SL 100D 50V    |
| C104     | 4010000330 | Ceramic       | DD105 SL 101J 50V    |
| RL1      | 6330000180 | Relay         | MZ-12HG              |
| RL2      | 6330000180 | Relay         | MZ-12HG              |
| RL3      | 6330000180 | Relay         | MZ-12HG              |
| RL4      | 6330000180 | Relay         | MZ-12HG              |
| RL5      | 6330000180 | Relay         | MZ-12HG              |
| RL6      | 6330000180 | Relay         | MZ-12HG              |
| RL7      | 6330000180 | Relay         | MZ-12HG              |
| RL8      | 6330000180 | Relay         | MZ-12HG              |
| RL9      | 6330000180 | Relay         | MZ-12HG              |
| RL10     | 6330000180 | Relay         | MZ-12HG              |
| RL11     | 6330000180 | Relay         | MZ-12HG              |
| RL12     | 6330000180 | Relay         | MZ-12HG              |
| RL13     | 6330000720 | Relay         | DS1-M-DC12V (AG2013) |
| F1       | 5210000130 | Fuse          | FGB 4A               |
| F2       | 5220000020 | Holder        | S-N5051              |
| F3       | 5220000020 | Holder        | S-N5051              |
| S1       | 6910000060 | Thermostat    | OHD-3 90M            |
| SP1      | 2510000040 | Speaker       | C065K1210810         |
| MF1      | 2710000160 | Fan Motor     | HMK2605-01-100       |
| EP1      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP2      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP3      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP4      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP5      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP6      | 6910000600 | Ferrite Bead  | FSOH050RN            |
| EP13     | 0910019444 | P.C. Board    | B 1790D (PA)         |
| EP14     | 0910018743 | P.C. Board    | B 1791C (FILTER)     |
| EP15     | 6910000600 | Ferrite Bead  | FSOH050RN            |


[PA UNIT]

| REF. NO. | ORDER NO.  | DESCRIPTION  |           |
|----------|------------|--------------|-----------|
| EP16     | 6910000600 | Ferrite Bead | FSOH050RN |
| EP20     | 6910000630 | Ferrite Bead | FSOH070RN |
| EP21     | 6910000630 | Ferrite Bead | FSOH070RN |
| EP33     | 6910000630 | Ferrite Bead | FSOH070RN |

# SECTION 9 VOLTAGE DIAGRAMS

## 9-1 FRONT AND MAIN UNITS

### FRONT UNIT

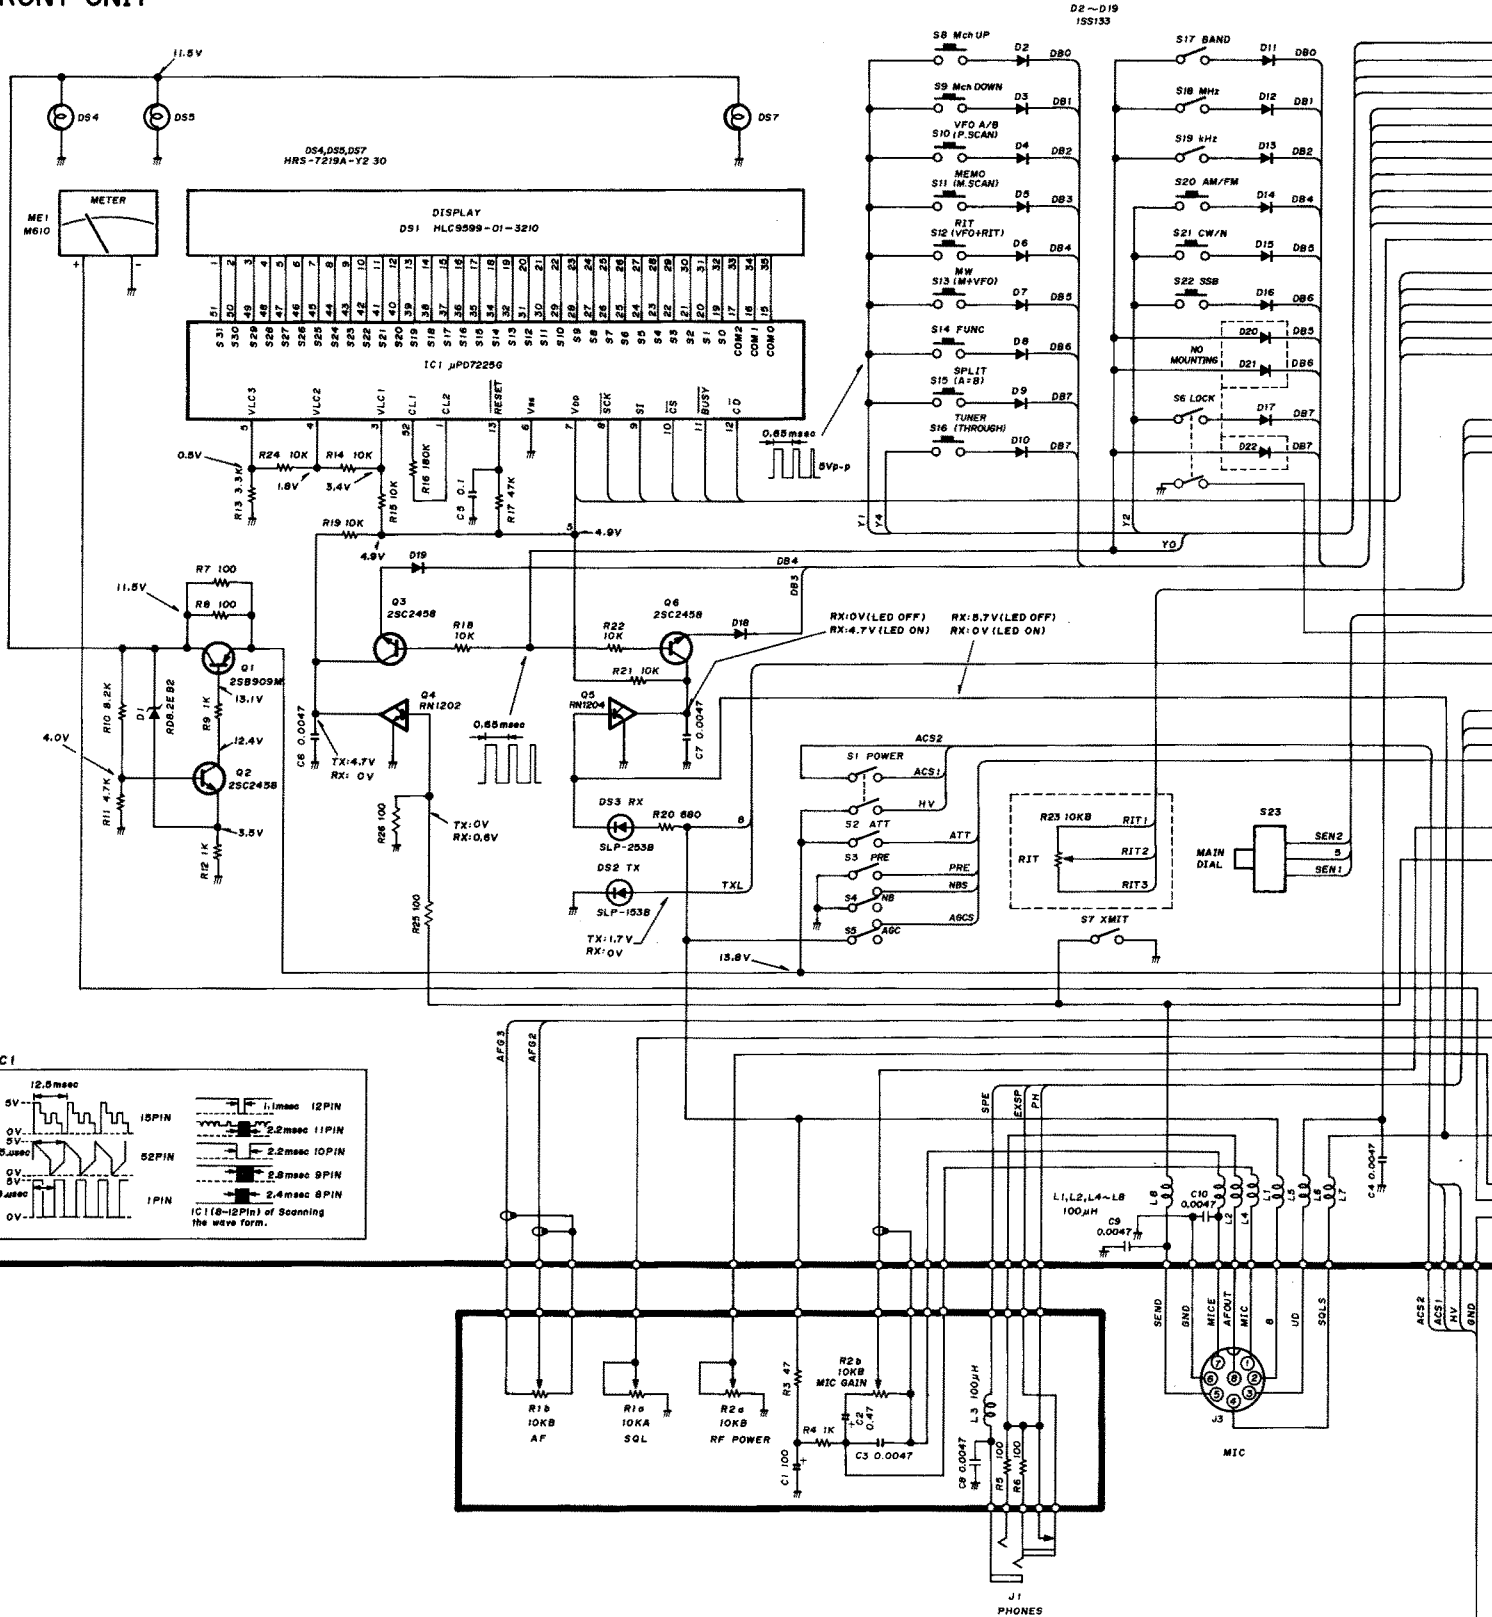










# MAIN UNIT

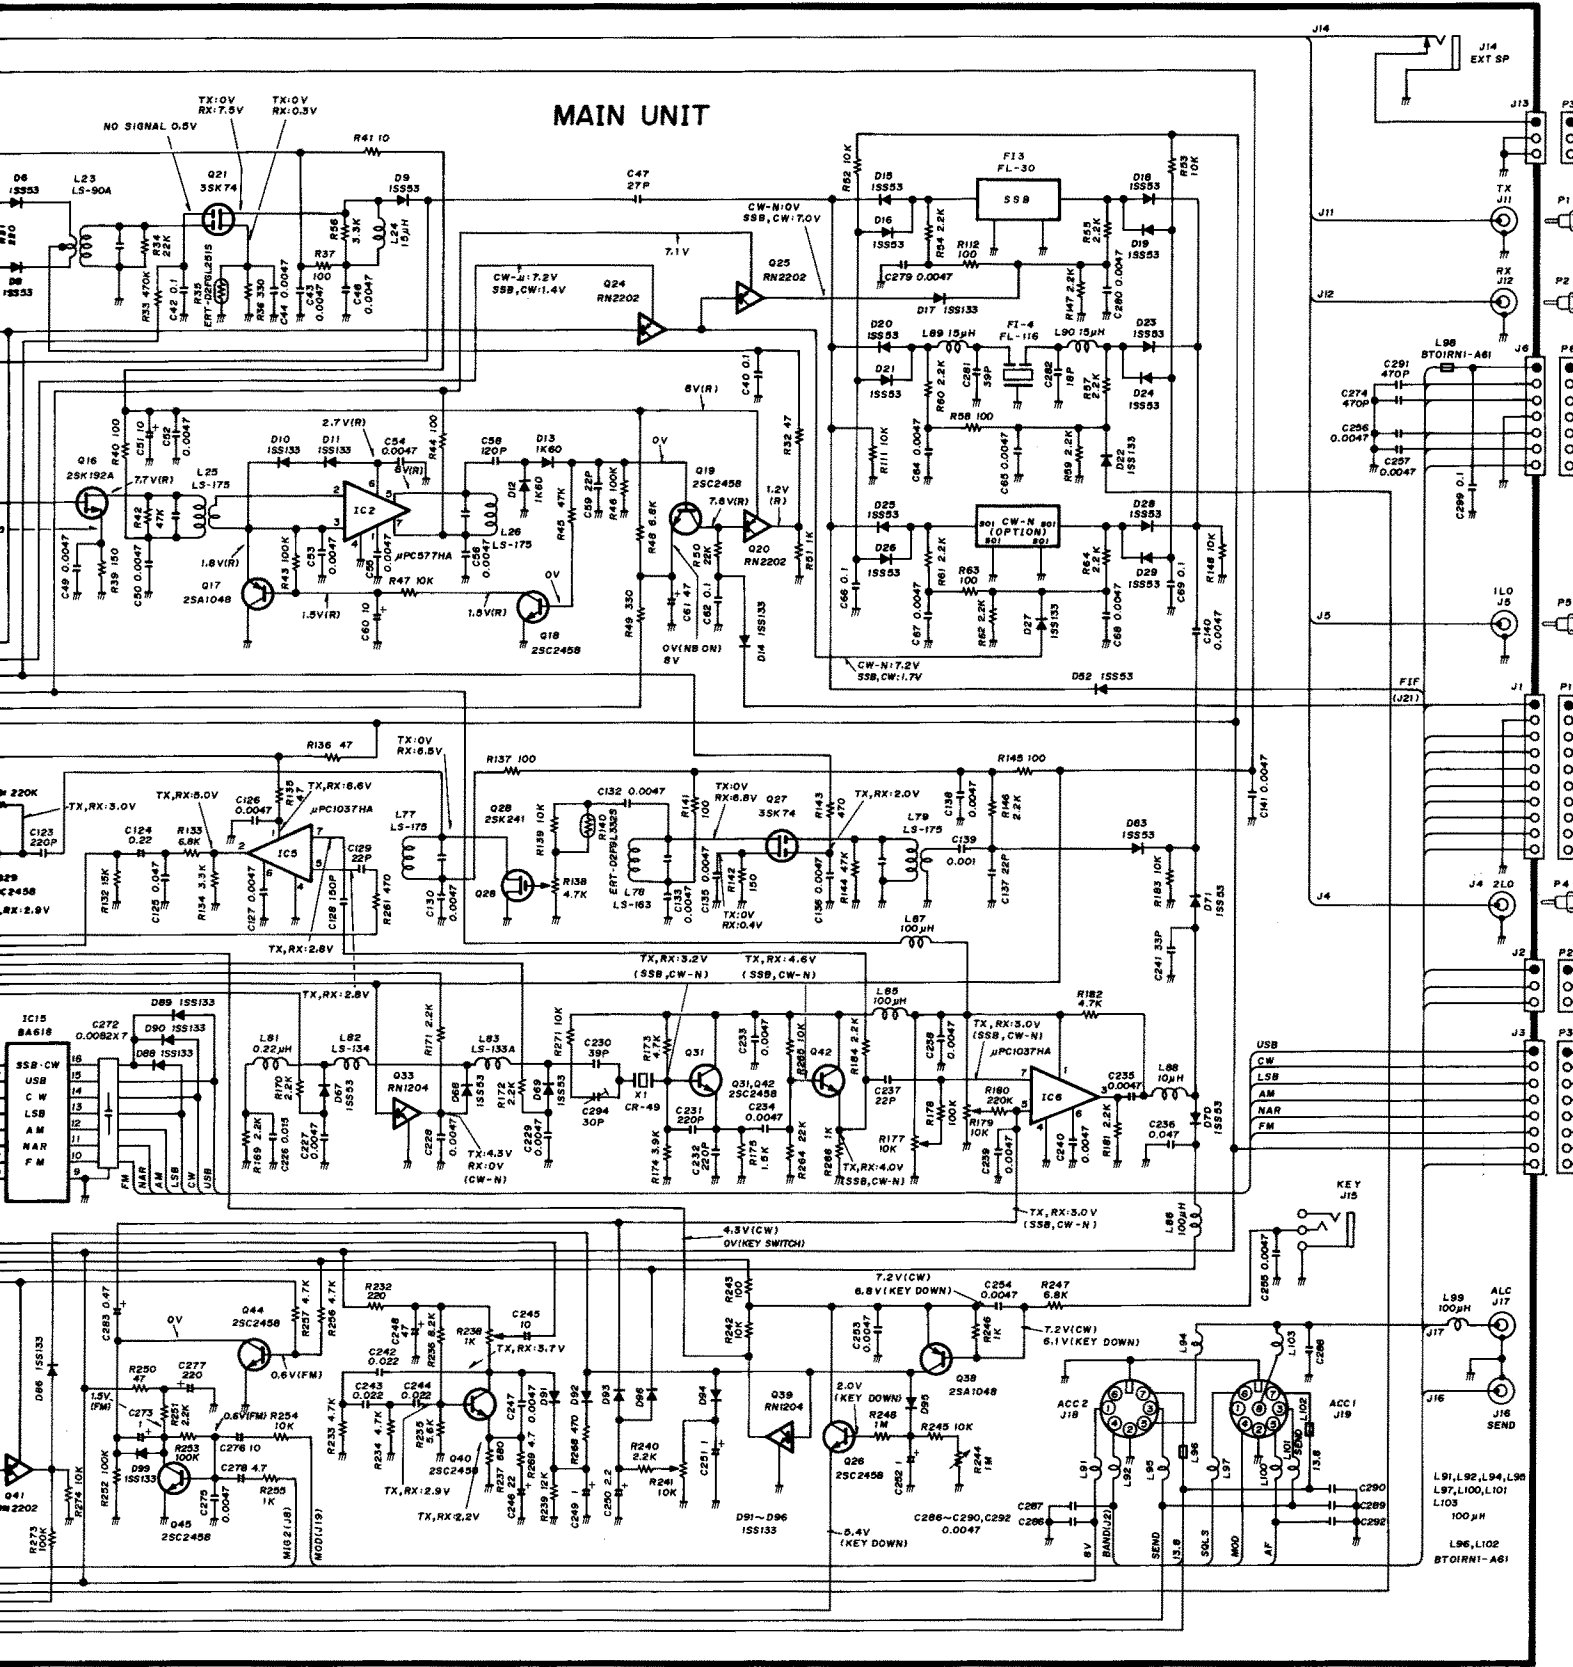


# FRONT AND MAIN UNITS

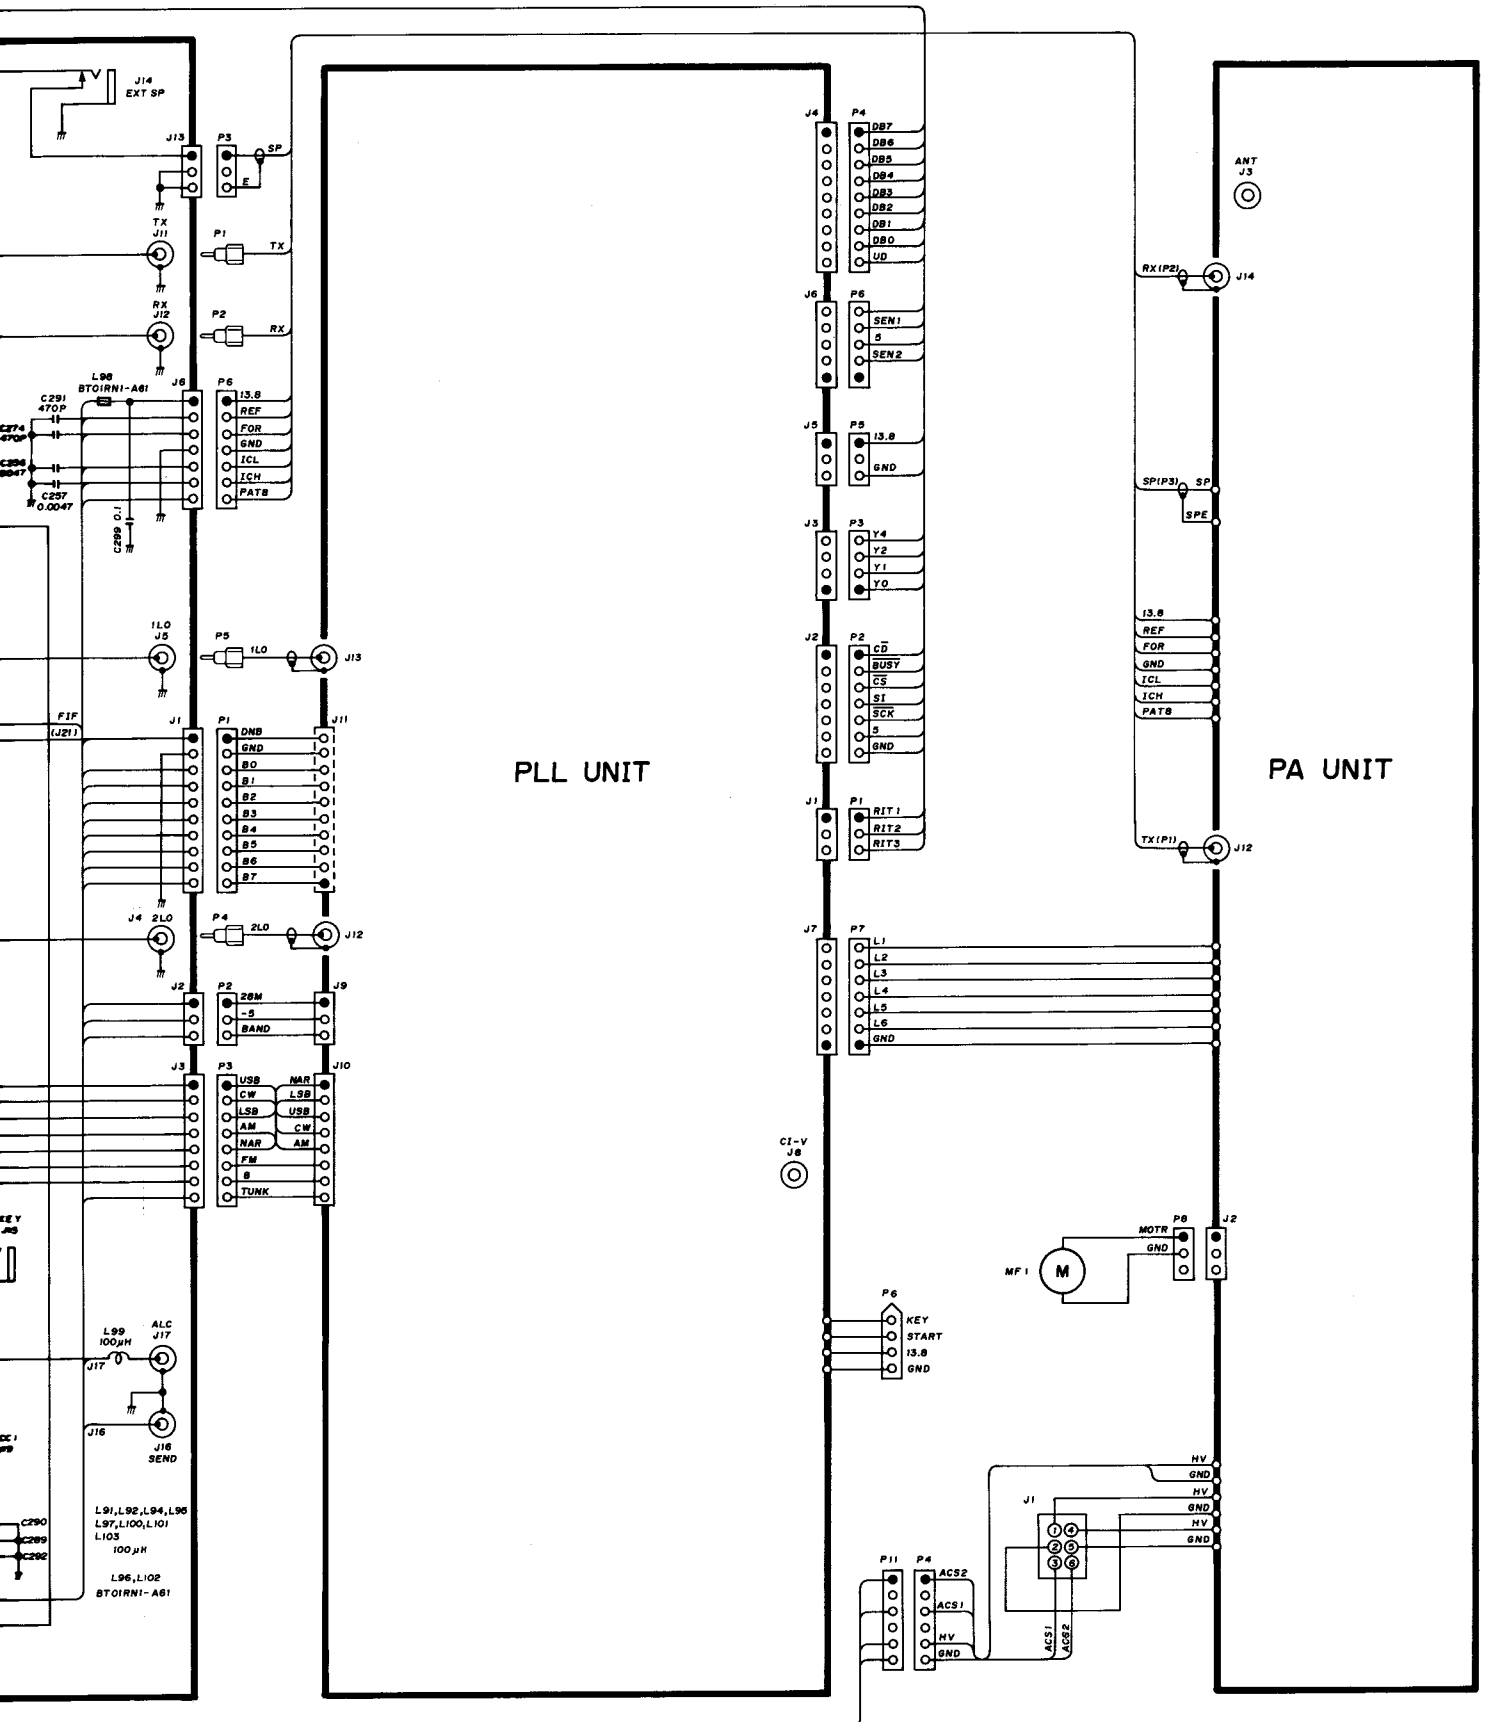

# 9-2 PLL AND PA UNITS


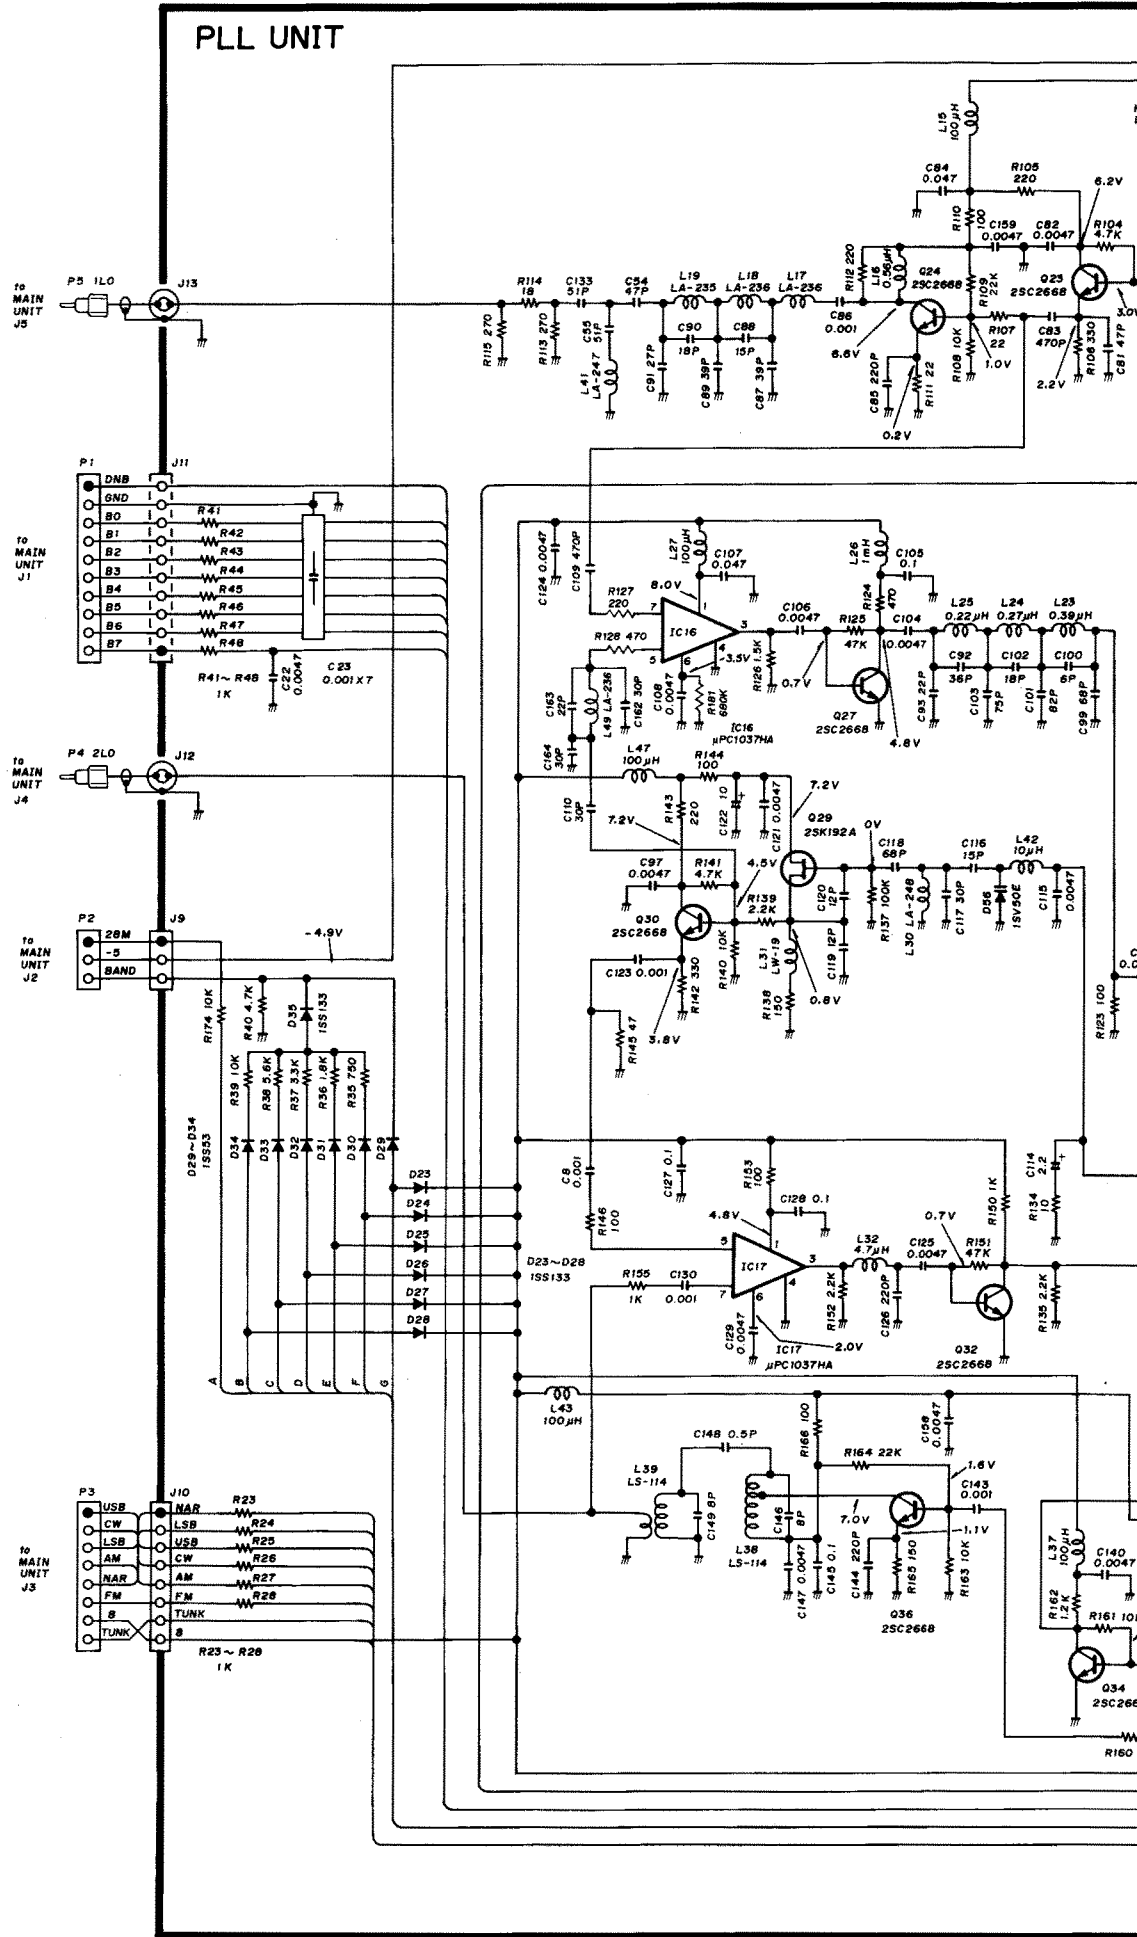




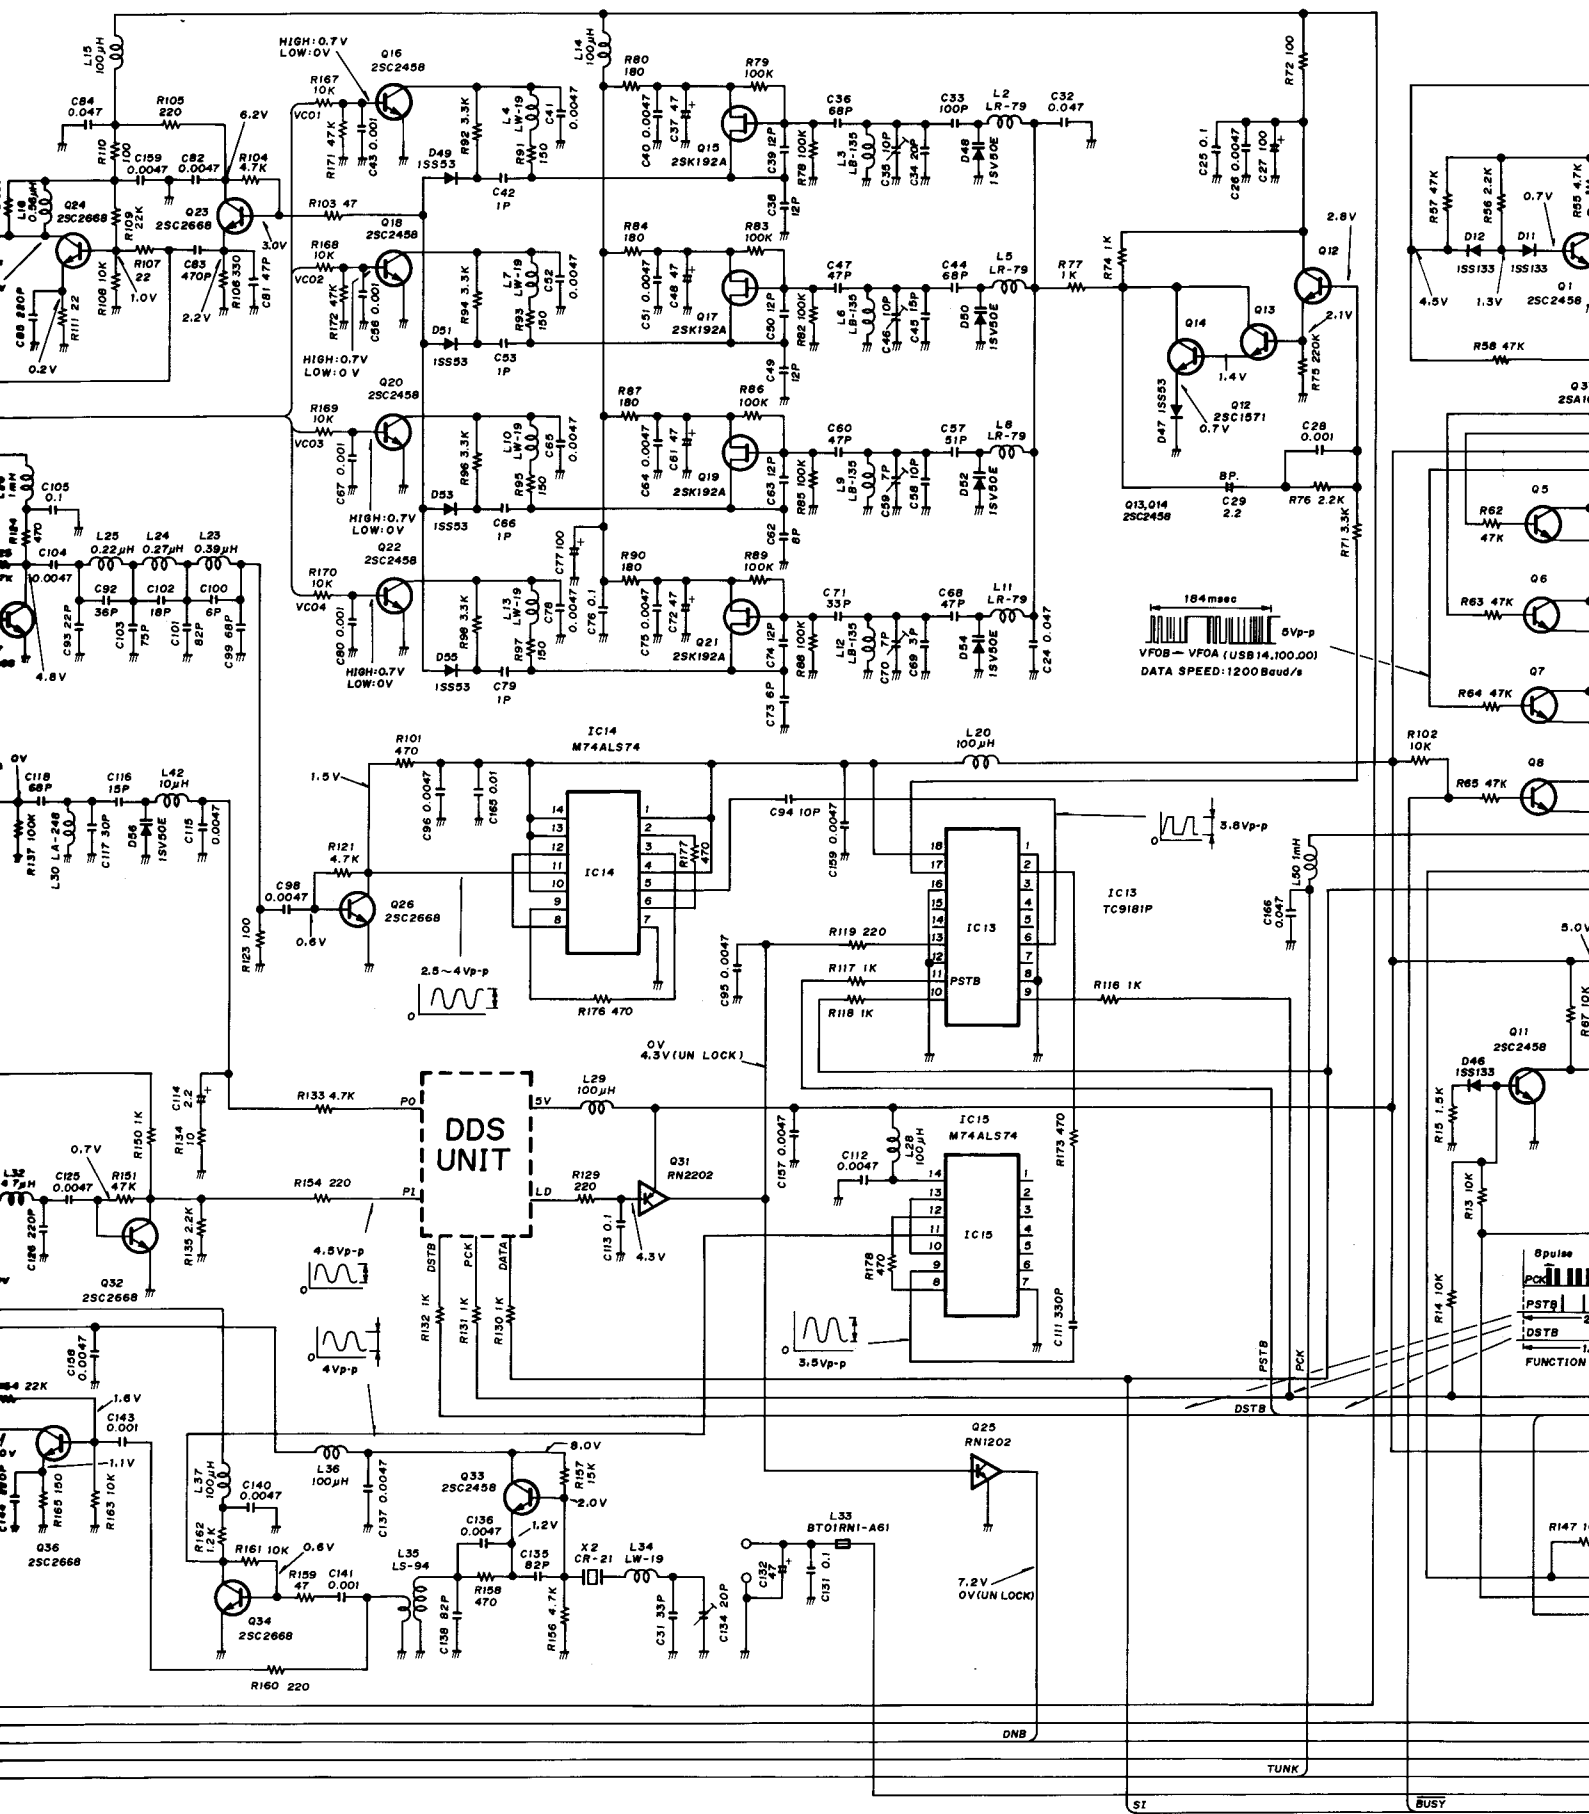



SI

TUNK

BUSY

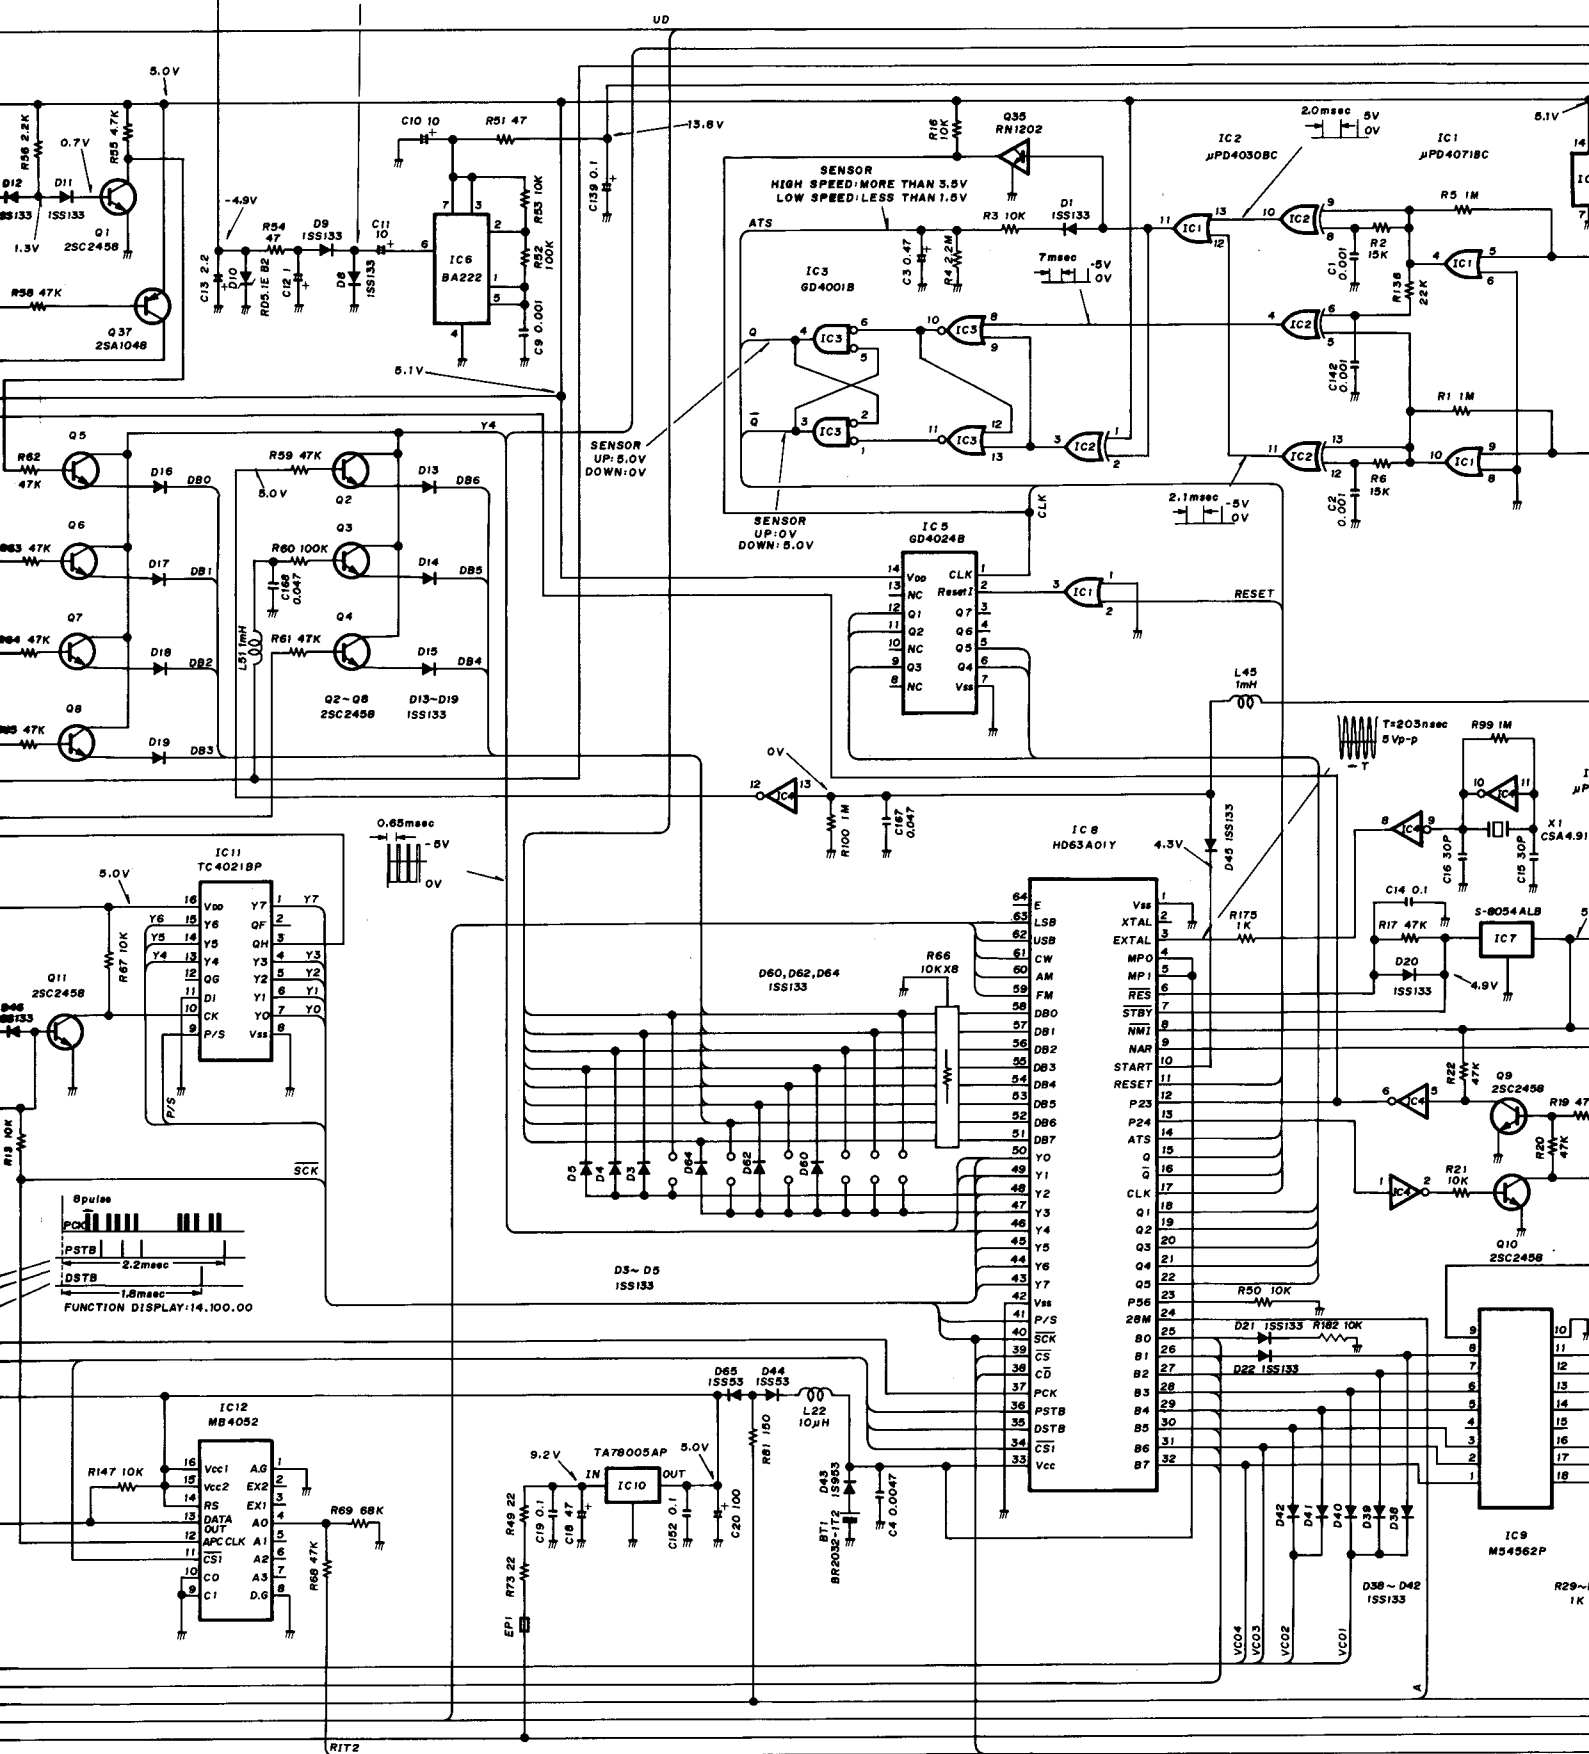

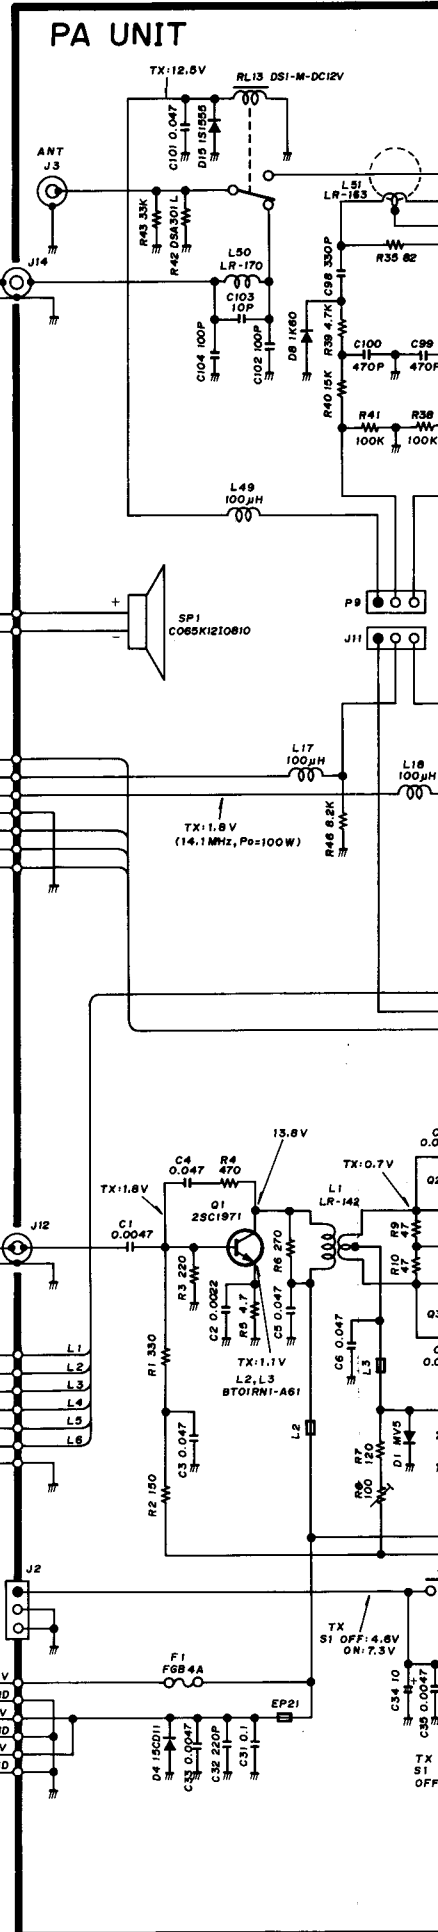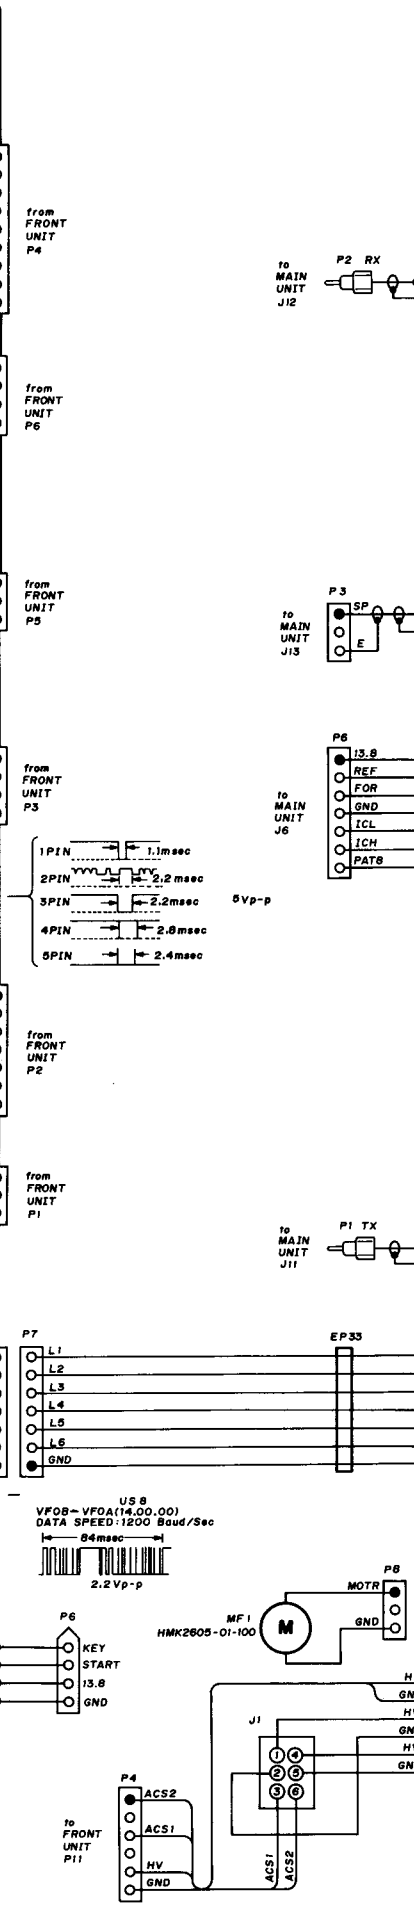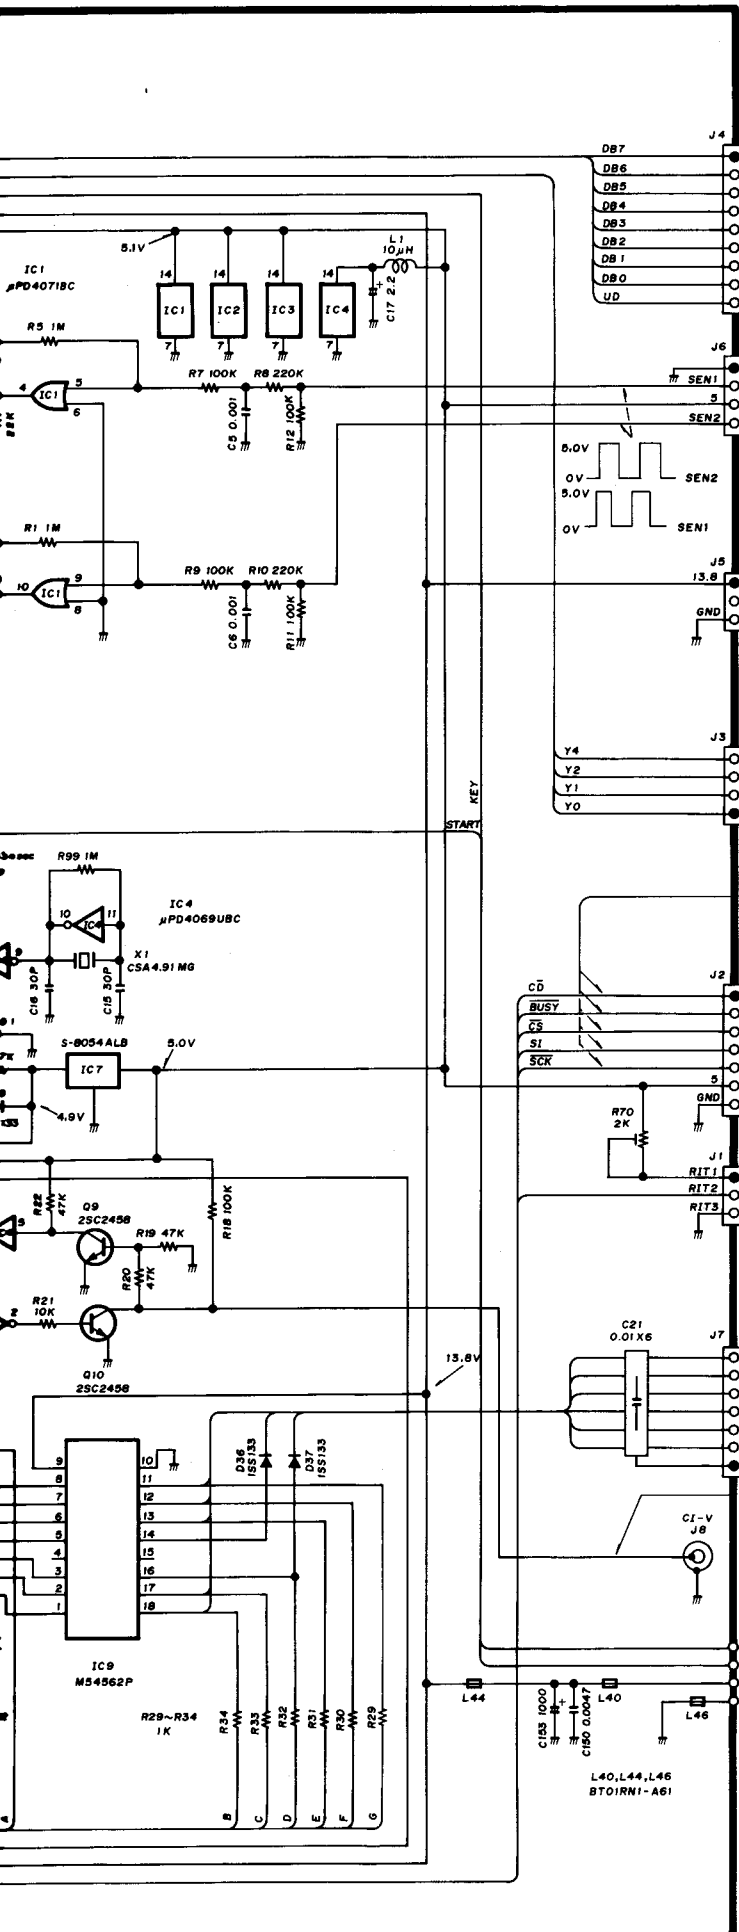

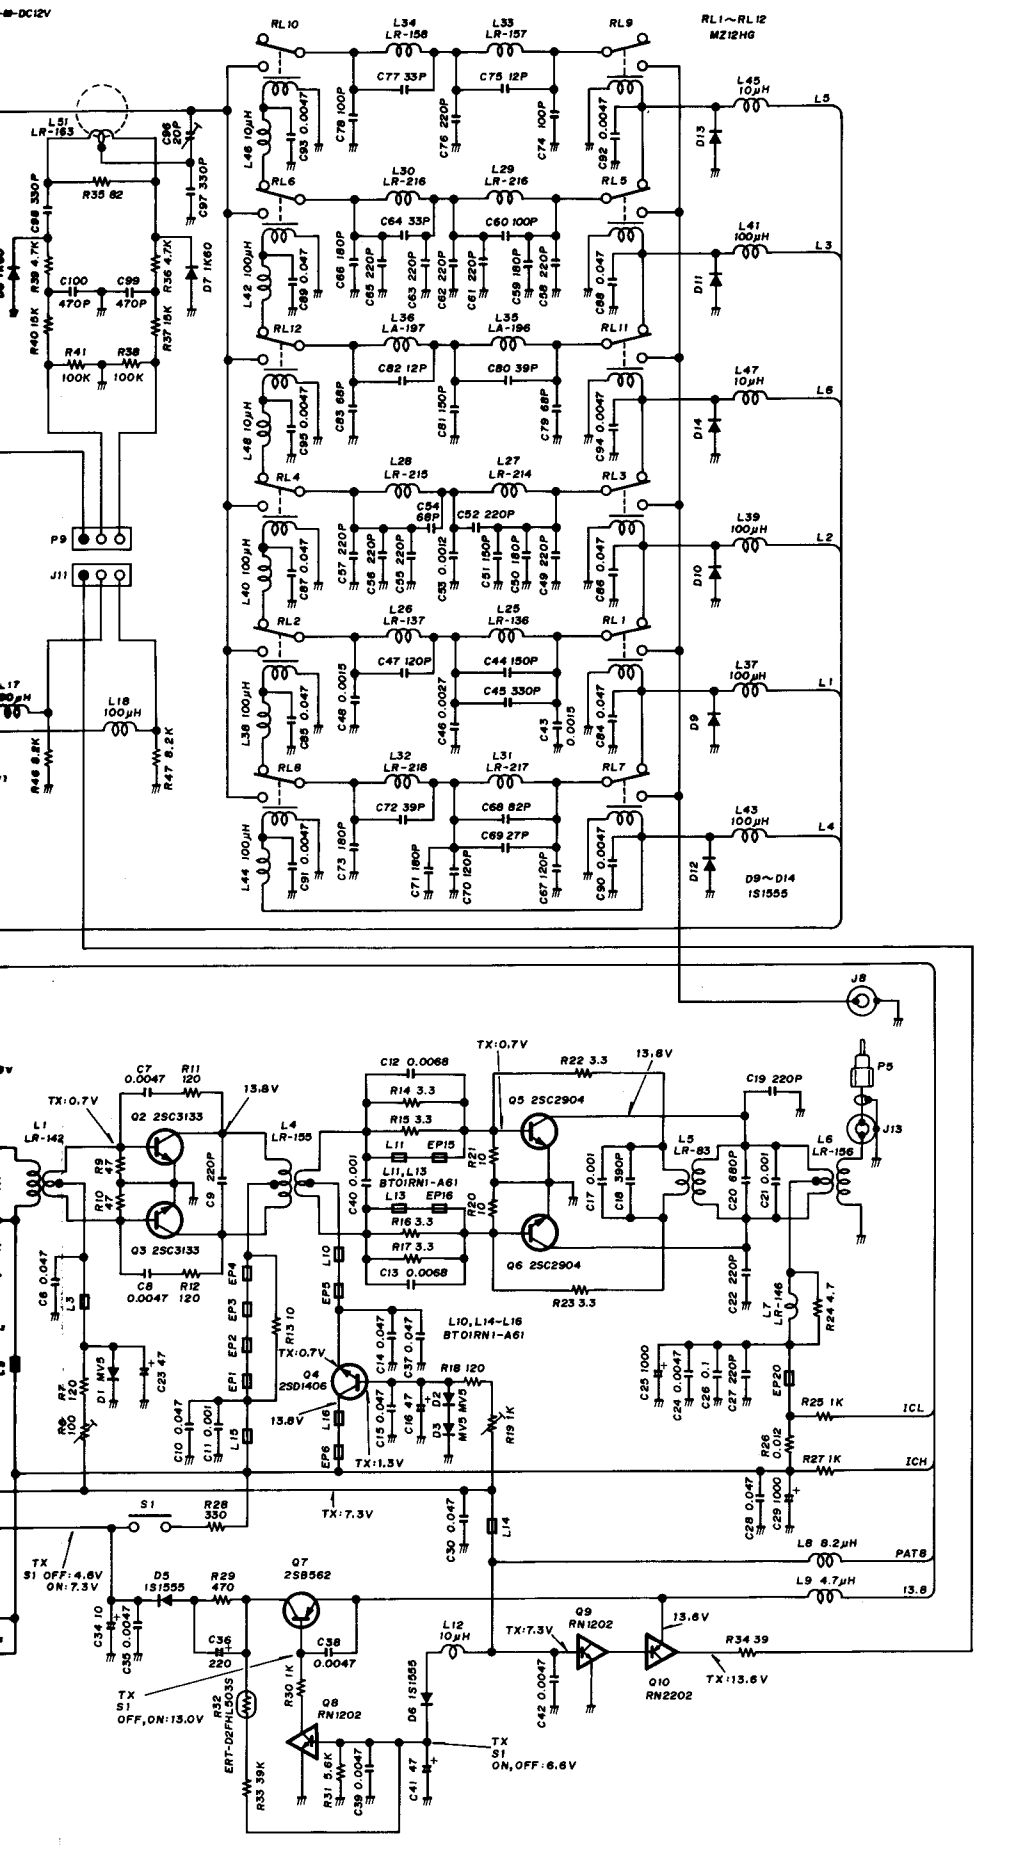



## Icom Inc.

6-9-16, Kamihigashi, Hirano-ku, Osaka 547, Japan  
Phone: 06 793 5301  
Fax : 06 793 0013  
Telex : 05277822 ICOMTR J

### Icom America Inc.

<Corporate Headquarters>  
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone : (206) 454-8155  
Fax : (206) 454-1509  
Telex : 152210 ICOM AMER BVUE

<Customer Service>  
Phone : (206) 454-7619

<Regional Customer Service Centers>  
3150 Premier Drive, Suite 126, Irving, TX 75063, U.S.A.  
Phone : (214) 550-7525  
Fax : (214) 550-7423

1777 Phoenix Parkway, Suite 201, Atlanta, GA 30349, U.S.A.  
Phone : (404) 991-6166  
Fax : (404) 991-6327

### Icom Canada

A Division of Icom America Inc.  
3071 #5 Road, Unit 9, Richmond, B.C., V6X 2T4, Canada  
Phone : (604) 273-7400  
Fax : (604) 273-1900

### Icom (Europe) GmbH

Communication Equipment  
Himmelgeister Str. 100, 4000 Düsseldorf 1, W. Germany  
Phone : 0211 346047  
Fax : 0211 333639  
Telex : 8588082 ICOM D

### Icom (Australia) Pty. Ltd.

Incorporated In Victoria  
7 Duke Street, Windsor, Victoria, 3181, Australia  
Phone : 03 529 7582  
Fax : 03 529 8485  
Telex : AA 35521 ICOM AS

### Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, U.K.  
Phone : 0227 363859  
Fax : 0227 360155  
Telex : 965179 ICOM G

### Icom France S.a

120 Route de Revel, BP4063, 31029 Toulouse Cedex, France  
Phone : 61. 20. 31. 49  
Fax : 61. 34. 05. 91  
Telex : 521515 ICOM FRA

Count on us!

---

---

---

---

---

---

---

---