

# INSTRUCTIONS

QF-1A AUDIO FILTER

PRICE: \$2.00

## CONTENTS

- |                       |                       |
|-----------------------|-----------------------|
| A. Initial hookup     | E. Warranty & Returns |
| B. Familiarization    | F. If writing         |
| C. Useful adjustments | G. Alignment          |
| D. In case of trouble | H. Late notes         |

Your new audio filter is the product of several years of development by the originator of commercial active audio filters for shortwave communications (1972.)

Each filter is thoroughly tested twice before shipment. Please read the instructions carefully for best results, and save them for future reference. If you require adaptors or other parts not supplied, please obtain these locally as we do not stock them.

### A. INITIAL HOOKUP

Plug the QF1-A into your receiver's phone jack, or speaker output. Any impedance is O.K. Obtain an adaptor if size is not compatible. Connect any impedance phones or speaker to the rear-panel phone jack output. To avoid hum or distortion with "hi-fi" headphones, use a series resistor about 47 ohms. (See "In case of trouble.")

The filter input may also be connected to the rcvr speaker wires. Just be sure the input cable shield (connected to QF-1A chassis) is connected to the grounded speaker wire; otherwise there may be hum.

Note: This is rare, but some Barlow-Wadley radios and CB sets require a load resistor across their speaker or phone output for a DC return. The filter's high input impedance does not provide this. Try a resistor in the range of 10 to 100 ohms installed in the radio across the output being used. Otherwise the set may appear to be dead, as the output stage bias is wrong.

### B. FAMILIARIZATION

The filter selects or rejects certain frequency components of signals you tune in. This allows it to reject undesired signals, such as noise and interference, while passing the desired signal, so long as the noise and signal are not on the same frequency. This frequency selection/rejection is optimized with 5 controls:

#### 1. Auxiliary Notch Frequency

A notch rejects a narrow band of frequencies, such as a whistle, or a code station. The aux. notch is present at all times. To effectively disable it, set it to either 80 or 11000 Hz. The aux. notch is very wide, for easiest tuning, and very deep. Its 135:1 frequency range is by far the widest ever available for communications, and should cover any signal.

#### 2. Function Select Switch (PK, NOTCH, LP, HP)

This switch, and the selectivity/frequency controls adjust the response of the main filter (all but the aux. notch.) PEAK (bandpass) passes a narrow band of frequencies, and rejects others-- just the opposite of NOTCH. LOWPASS passes low frequencies, while rejecting high frequencies (e.g. hiss.) HIGHPASS is the opposite of lowpass, it passes high frequencies, while rejecting low frequencies. An exception occurs at high selectivity, where LP and HP take on the some of the characteristics of peak.

#### 3. Selectivity Control

In PEAK, this control determines the filter bandwidth. Peak bandwidth as narrow as 14 Hz (-3 dB) or 20 Hz (-6 dB) is available at 300 Hz. The bandwidth gradually increases to 20 Hz at an 800 Hz. center frequency, and reaches a few hundred Hz at the highest frequency setting (2500 Hz). This bandwidth increase is deliberate and makes for easiest tuning. At min. sel., the filter is almost flat.

In NOTCH and LOWPASS, the panel suggest the best settings. More selectivity rotation (clockwise) make the notch narrower, and shallower, hence harder to tune; in LOWPASS and HIGHPASS, excessive selectivity rotation can lead to ringing at some frequencies.

The ideal "theoretical" best selectivity for least peaking in LOWPASS and HIGHPASS occurs when the selectivity control is rotated about two-thirds the frequency control, i.e., if the frequency control is rotated 50%, rotate the selectivity control about 30%. However, this "rule of thumb" should be broken under many conditions (See Tables 1 and 2.)

#### 4. Frequency Control

This tunes the main filter frequency from about 250 to 2500 Hz., the entire usable communications range for voice, CW, and digital (RTTY, SSTV, etc.) signals.

#### 5. In/Out Switch

This turns off the AC power and bypasses the filter. There is an unavoidable click when thrown due to power supply charging or discharging. The filter draws less than 1/2 watt if left on accidentally.

Note: Volume is adjusted with your receiver's gain control. Gain at high selectivity in PEAK (and LP) is high, and very little noise comes through; so keep receiver gain low under these conditions to avoid saturation of the QF-1A power amp (distortion) when the desired CW signal comes through!

### C. USEFUL ADJUSTMENTS

See tables 1 and 2.

### D. IN CASE OF TROUBLE

We carefully test all filters. Most problems occur when first used due to improper connection (read instructions again,) or misunderstanding of operation. The following are most common:

HUM OR DISTORTION WHEN USING HEADPHONES: Hum generated in the QF-1A is normally barely audible with a speaker unless you place your ear within a few inches of the speaker. However, hum and distortion may be troublesome if you use 4-8 ohm "hi-fi" headphones, which are much too sensitive. To cure this (and to improve "hi-fi" listening, as well!) connect a 47 ohm resistor in series with this type of headphone.

HUM WITH SPEAKER: Usually this comes from your receiver. The QF-1A loads the receiver output much less than a speaker or phones. Therefore, you may find that switching the filter "on" produces hum, although no hum is heard in the filter "off" (bypass) position. This may simply be because the filter is not loading down the receiver as much. To see if the filter is really causing the hum, pull the filter input jack out of your receiver (not the same as switching to bypass!). If the hum goes away, or is reduced to nothing, with the filter input jack lying on the table, then the hum is coming from the receiver, and being emphasized because of the light loading by the filter input. Several solutions are indicated: 1) Check for good contact between the filter input plug and receiver jack, 2) Especially if the receiver phone jack is on an auxiliary speaker, try connecting some hookup wire between the speaker case and the receiver/xcvr chassis, or between the filter chassis. 3) Try connecting a 10 to 47 ohm resistor across the receiver phone jack or other output to load it down.

PICKUP OF YOUR TRANSMITTED SIGNAL: This should be extremely rare with the QF-1A, as layout and RF bypass caps. are excellent, and show no sign of RF at 2 KW with the antenna 20 feet away and the cover off, in our tests. However, some shacks, especially using end-fed antennas in the shack, and/or extreme RF on the 115 VAC AC line, may possibly interfere with any audio gear. Solutions in this case are: 1) Plug the filter into an outlet away from the transmitter 2) Move the filter physically... a few feet away from the strong RF source; experiment. 3) Try connecting pieces of hookup wire between various units in the shack to eliminate ground loops. e.g. xcvr/linear, linear/filter, spkr case/ filter, etc. until all possible combinations have been tried. 4) Use a good waterpipe ground to your rig 5) Try an L/C RFI AC line filter available at a local Radio Shack or CB store. 6) Read more in radio handbooks. The above measures are rarely necessary as the QF-1A has been designed for use in high-power transmitting stations. So, if you have a problem, you must solve it in your shack; and all shacks are different.

BATTERY OPERATION DESIRED: Locate the rectifier diodes, D1 and D2 on the schematic. These are directly forward of the right transformer screw (as viewed from the front of the unit.) Connect +12 to +14 VDC to the right side of either diode (the side with the band on the diode). Connect the battery ground to the filter chassis ground. Note: Reversal of battery polarity, even for an instant, will burn out the filter-- not covered by warranty.

Also, see "Late Notes."

Downloaded by  
Amateur Radio Directory

Table 1. USEFUL ADJUSTMENTS

Your QF-1A can "imitate" the response of virtually any filter with fixed responses, at any price, and give an infinite number of other useful responses, as well! Truly, if the QF-1A can't pull the signal out, no other filter can either! However, the QF-1A flexibility means that even experienced operators will need some time to learn how to best use all the controls. The following table will aid you. **IMPORTANT:** Don't give up on a setting because it doesn't seem to help. Tomorrow, with different conditions, this setting may turn out to be just what's needed.

CONDITION	USEFUL ADJUSTMENTS (See note 1 for AUX. NOTCH setting)
Desired CW Signal	PEAK. Casually listen with 7 to 10 o'clock selectivity, yielding a relatively "wide" 80 to 120 Hz bandwidth. Adjust frequency for desired CW note. Gradually increase selectivity and touch-up frequency to match conditions. There is much confusion among hams about "ringing" of a CW filter, mainly caused by mfrs. of filters without the narrow ultimate selectivity of the QF-1A. Basically, here is the truth: ALL filters will produce audible ringing at bandwidths below 80-120 Hz, (and many poorly designed filters will ring even at wider bandwidths.) So the only way to eliminate ringing is to use wide bandwidth (low selectivity on the QF-1A.) On the other hand, a CW signal has a bandwidth less than 10-20 Hz., so a very narrow filter can pass the entire CW signal and greatly reduce interference-- but at the expense of ringing. The QF-1A gives you your choice (at considerable increase in manufacturing complexity.) High selectivity will be found to be invaluable in very heavy QRM or pileups, allowing you to hear signals inaudible at wider bandwidths, but high selectivity is not as useful in thermal noise. Note that gain at the peak increases at high selectivity, while background noise is reduced. So keep receiver audio gain low at high selectivity to avoid blasting when the desired signal comes through the narrow "slot."  LOWPASS. Produces an effect similar to peak at high selectivity. Ignore LP sel. panel markings for CW reception. If you listen to CW at a low note (more than 12 o'clock freq. rotation), you may find that you prefer LOWPASS. But LP is wider, and gain varies more.
Voice Signal with Splatter	LOWPASS. Adjust selectivity as on panel; rotate frequency for best compromise between rejection of splatter and rejection of desired signal. Frequency rotations beyond 8-10 o'clock rejects desired signal heavily, making it sound bassy. The idea is to find the best cutoff frequency, to maximize copy. If splatter completely covers the desired signal, or if two signals are on the same frequency, the situation is impossible, and no known method of signal processing will work.
Voice Signal (Moderate interference)	PEAK: This position, at moderate selectivity of 7-9 o'clock, and frequency adjusted for best copy, can sometimes clean up signals and give more "presence." HIGHPASS: Full frequency rotation (250 Hz) and 3-5 o'clock selectivity, along with AUX. NOTCH at 9 o'clock, can give greater presence under some conditions. To reject "lows" or hum, set frequency as low as 11 o'clock, with selectivity rotated about 2/3 of frequency.
Multiple Whistles or CW	Normally, AUX NOTCH is used. But the MAIN NOTCH is deeper (to 70 dB), and can be made narrower (at high selectivity). Use notch sel. shown on panel. The notch is not as deep at high selectivity, so use minimum sel. rotation consistent with least rejection of desired signal. Note: To help find the notch frequency, momentarily switch to PEAK at high sel., peak the whistle, then switch back to notch at moderate selectivity. Touchup the main frequency slightly since peak and notch may not track perfectly. For two whistles, or CW, or teletype QRM, use both main and Aux. notch.
Weak CW	An AC voltmeter, or scope, across the filter output is a big help in peaking weak CW.
Strong Signal	A "flat" response is approximated with aux. notch at 11,000 and main filter as follows: PEAK: Freq= 12 o'clock; Sel.=Min. NOTCH: Freq.= 2500 ; Sel.=max. LOWPASS: Freq.=2500 ; Sel.=Min. HP: Freq.= 250 ; Sel.= 2 o'clock Note: Even with these settings the filter contains additional fixed rolloffs below 250 Hz. and above 2500 Hz., so is not intended for "Hi-Fi" applications, only communications.
TTY, SSTV and Misc.	For TTY, SSTV, etc. reject low frequencies using Highpass; sel. and freq. about 10-12 o'clock (experiment.) Or use notches to reject CW, etc. You will no doubt discover other settings for voice, CW, etc. not in this table, but useful under some conditions, or with your own ear preferences. There is a conceivable use for almost all of the infinite number of settings under some conditions, and with some signals.
Line noise, ignition, or other static.	The QF-1A will produce some improvement due to narrower bandwidth, especially on CW, but nothing dramatic on voice. The only really good solutions are a good IF NOISE BLANKER in your receiver, or a beam antenna. Even IF blankers are generally ineffective except on car ignition noise-- and may help a little on line noise. Audio NOISE LIMITERS (not to be confused with IF BLANKERS) can be built for the cost of two 5c diodes (see Radio Amateurs Handbook), but we found them to cause distortion and be virtually worthless for noise, so they are not included, despite their negligible cost.

NOTE 1. AUX. NOTCH SETTING. It's usually best to leave the Aux. Notch at 11,000 until the main filter is adjusted for best results. Set it at about 9 o'clock for voice, where it rejects a wide band of hiss and high-freq. whistles. Set it to reject any loud whistle or CW at other frequencies.

Table 2. CONDENSED VERSION OF TABLE 1.

CONDITION	FUNCTION	SELECTIVITY	MAIN FREQUENCY
CW	PEAK (OR LP)	8 o'clock or more	For best copy
VOICE SPLATTER	LOWPASS	As on panel	7 to 11 o'clock
VOICE	PEAK	7-9 o'clock	For best clarity
VOICE	HP	3-5 o'clock / 11 up	250 Hz. / 11 up
WHISTLE & OTHER QRM	TO REJECT QRM	-----	----- (Use aux. notch to reject whittle)
TWO WHISTLES	NOTCH	As on panel	To reject whistle (plus aux. notch.)
SSTV, TTY	HP	10-12 o'clock	Same as sel. (or use notches if whistles are problem)

## E. WARRANTY AND RETURNS

We back our products better than most companies-- not just 90 days, but one full year. Our Attorney insists we supply the following lengthy description: **LIMITED ONE YEAR WARRANTY:** Autek Research warrants to the original consumer purchaser that its products shall be free of defects in workmanship and materials for one year from date of purchase.

**WARRANTY LIMITATIONS:** This limited warranty does not cover, and we are not responsible for, any product which has been modified by the owner, or any malfunction or failure resulting from improper use, improper applied voltage, improper service or repair by the owner or his agent, or from abuse, neglect, accident, lightning damage, fire, use contrary to instructions, or other causes beyond the control of Autek Research. This warranty is made to the original consumer purchaser only, and is effective only upon presentation of documented evidence of provable date of purchase.

This warranty covers only Autek products, used for purposes as advertised. We are not responsible for incidental or consequential damages. Some states do not allow exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**TO OBTAIN SERVICE, FOLLOW CHECKLIST BELOW** then mail to Autek Research, Box 302 Odessa, Fla. 33556

Our records show your order, by date of order. If you wish to claim warranty service you must do so with the return. You must tell us your purchase date **WITHIN 10 DAYS.** Or else enclose copy of check or monthly charge account statement. We don't send invoices, as the above policy works well, and we've never had any unresolved disputes regarding the warranty. (However, a statement that you "bought the unit a few months ago" is not sufficient for us to find your order, and service charges would automatically apply.)

Our minimum repair charge out of warranty is **\$17.00** in "USA. Enclose an additional \$15 outside North America for shipping. This charge does not cover units heavily damaged i.e. by lightning or mods, only random failures.  
**CHECKLIST WHEN RETURNING A UNIT:**

- ✓ 1. Enclose purchase date, as described above with **ANY** return, unless you simply wish repair out of warranty. In this case, enclose a check or MO for a minimum of **\$17.00**, as described above, plus \$15 outside North America.
- ✓ 2. **ANY RETURN** not complying with the above instructions will waste time and is subject to an additional \$3 charge for correspondence, or return, COD, without any action taken. **FOLLOW THE ABOVE INSTRUCTIONS.**
- ✓ 3. Enclose a **detailed** description of the problem and above checks, proof of purchase date, etc. **INSIDE** the package. Do not send separate correspondence explaining that you are returning the unit. Put everything **INSIDE THE PACKAGE.**
- ✓ 4. Allow 2-3 weeks for repair plus up to 2 weeks shipping times. Exception: if you just got the unit we'll normally ship a replacement immediately. (Only 1 in 4000 packages are lost. If repair takes longer, be patient. We're working on it. It's not lost.)

### F. If writing:

- ✓ 1. Most ask about things already covered in instructions. Read again carefully. They represent virtually everything we know about characteristics, hookup, problems, etc. There is little else to tell.
- ✓ 2. Always state your purchase date.
- ✓ 3. Always give full details. Your rig, phone or speaker, exact hookup, and detailed symptoms. Most letters are much too vague. We want to help you, but have no idea of the condition of your rig, your ability to follow the instructions, or what you've tried, and no desire to carry on extensive correspondence. Include **all** details in the first letter.
- ✓ 4. We will not comment on **any** modifications to the QF-1A, as inventive hams would make this a full-time job.
- ✓ 5. Enclose a self-addressed stamped envelope for a much speedier reply; O.K. to fold envelope.
- ✓ 6. Not necessary to write before returning a unit. Simply follow instructions ("E") carefully.

## G. ALIGNMENT

The circuit has two alignments. Neither should require adjustment unless disturbed, especially the Main filter Tracking alignment, which is quite non-critical. The Aux. Notch Depth alignment is more critical and sensitive.

Keep the input signal **low**, to avoid saturation. A scope is recommended at the filter output for most accurate alignment, although an AC voltmeter, or even the ear, can produce acceptable results.

The alignment frequency of 800 Hz. produces best results over the entire filter range. However, if you desire best results at another frequency far removed from 800 Hz., i.e. 2000 Hz., it may be better to align the filter at the frequency of most interest.

1. **Aux. Notch Depth Alignment:** Adjusted by the 10K tri-pot near the left side of the circuit board-- behind the aux. notch pot and slightly to the right. Feed in a signal at approx. 800 Hz. (not critical.) Your receiver's calibrator beat note, or a signal generator may be used. 800 Hz is an average frequency for CW reception, and occurs at about 10 o'clock rotation of the MAIN frequency. Turn the aux. notch frequency for minimum signal. Then adjust the tri-pot for minimum signal. Now touch up the aux. notch freq. and repeat the tri-pot adjustment for minimum signal. Continue adjusting until no further improvement is noted.

2. **Main Filter Tracking Alignment:** There are two complete filters in series in the main filter. These filters are adjusted to track by this alignment. The alignment tri-pot is directly behind the main (250-2500 Hz) frequency control on the right side of the board. Feed a signal at approx. 800 Hz. (not critical) into the filter. Select "peak" and rotate selectivity full (20 Hz setting.) Set the aux. notch at 11000. Peak the signal with the main freq. control. Then adjust the tri-pot for max. response. Readjust the main freq. and tri-pot for max. response. Repeat until no further improvement in response is noted.

Note: Alignment is the responsibility of the owner, even if needed during warranty. Our minimum \$17.00 service charge applies to any return simply requiring alignment.


## H. Late notes

If you wish the QF-1A to drive a speaker in "bypass" you must obviously connect the QF-1A input to a rig output which is capable of driving a speaker. (Some headphone outputs, but not all, can drive a speaker.) When the filter is on, virtually any high-level rig output can drive it. However, in "bypass" the rig output is connected directly to the QF-1A output jack, so the rig must be capable of driving the speaker, if any, connected to the QF-1A output.

The QF-1A has proved to be extremely reliable. Despite a 1 year warranty, we've had periods of up to 3 months where not a single unit has failed on return! However, we emphasize that **MOST RETURNS** have nothing wrong with them. Please be sure there is a problem before any return.

RF pickup seems to have been virtually eliminated. However, approximately every 4 months, someone reports RFI. If pickup should occur, we emphasize again that there is nothing wrong with your unit, and any problem must be solved in your shack. (See "In case of trouble.") Reports are that all owners have been successful, usually by eliminating ground loops, or using an AC line filter, in these rare stubborn cases.

If you have an SWL (not a ham or military) radio, you may experience bad hum, or the filter may appear to be dead. On DX300/302 radios the phone jack floats, and you'll get bad hum unless you connect a wire from the filter chassis to DX300/302 chassis (use the cabinet screws for connection, for example.) Also read section "A" again. If you can't solve any problem, see Section "F," and provide complete details. We probably have the solution.

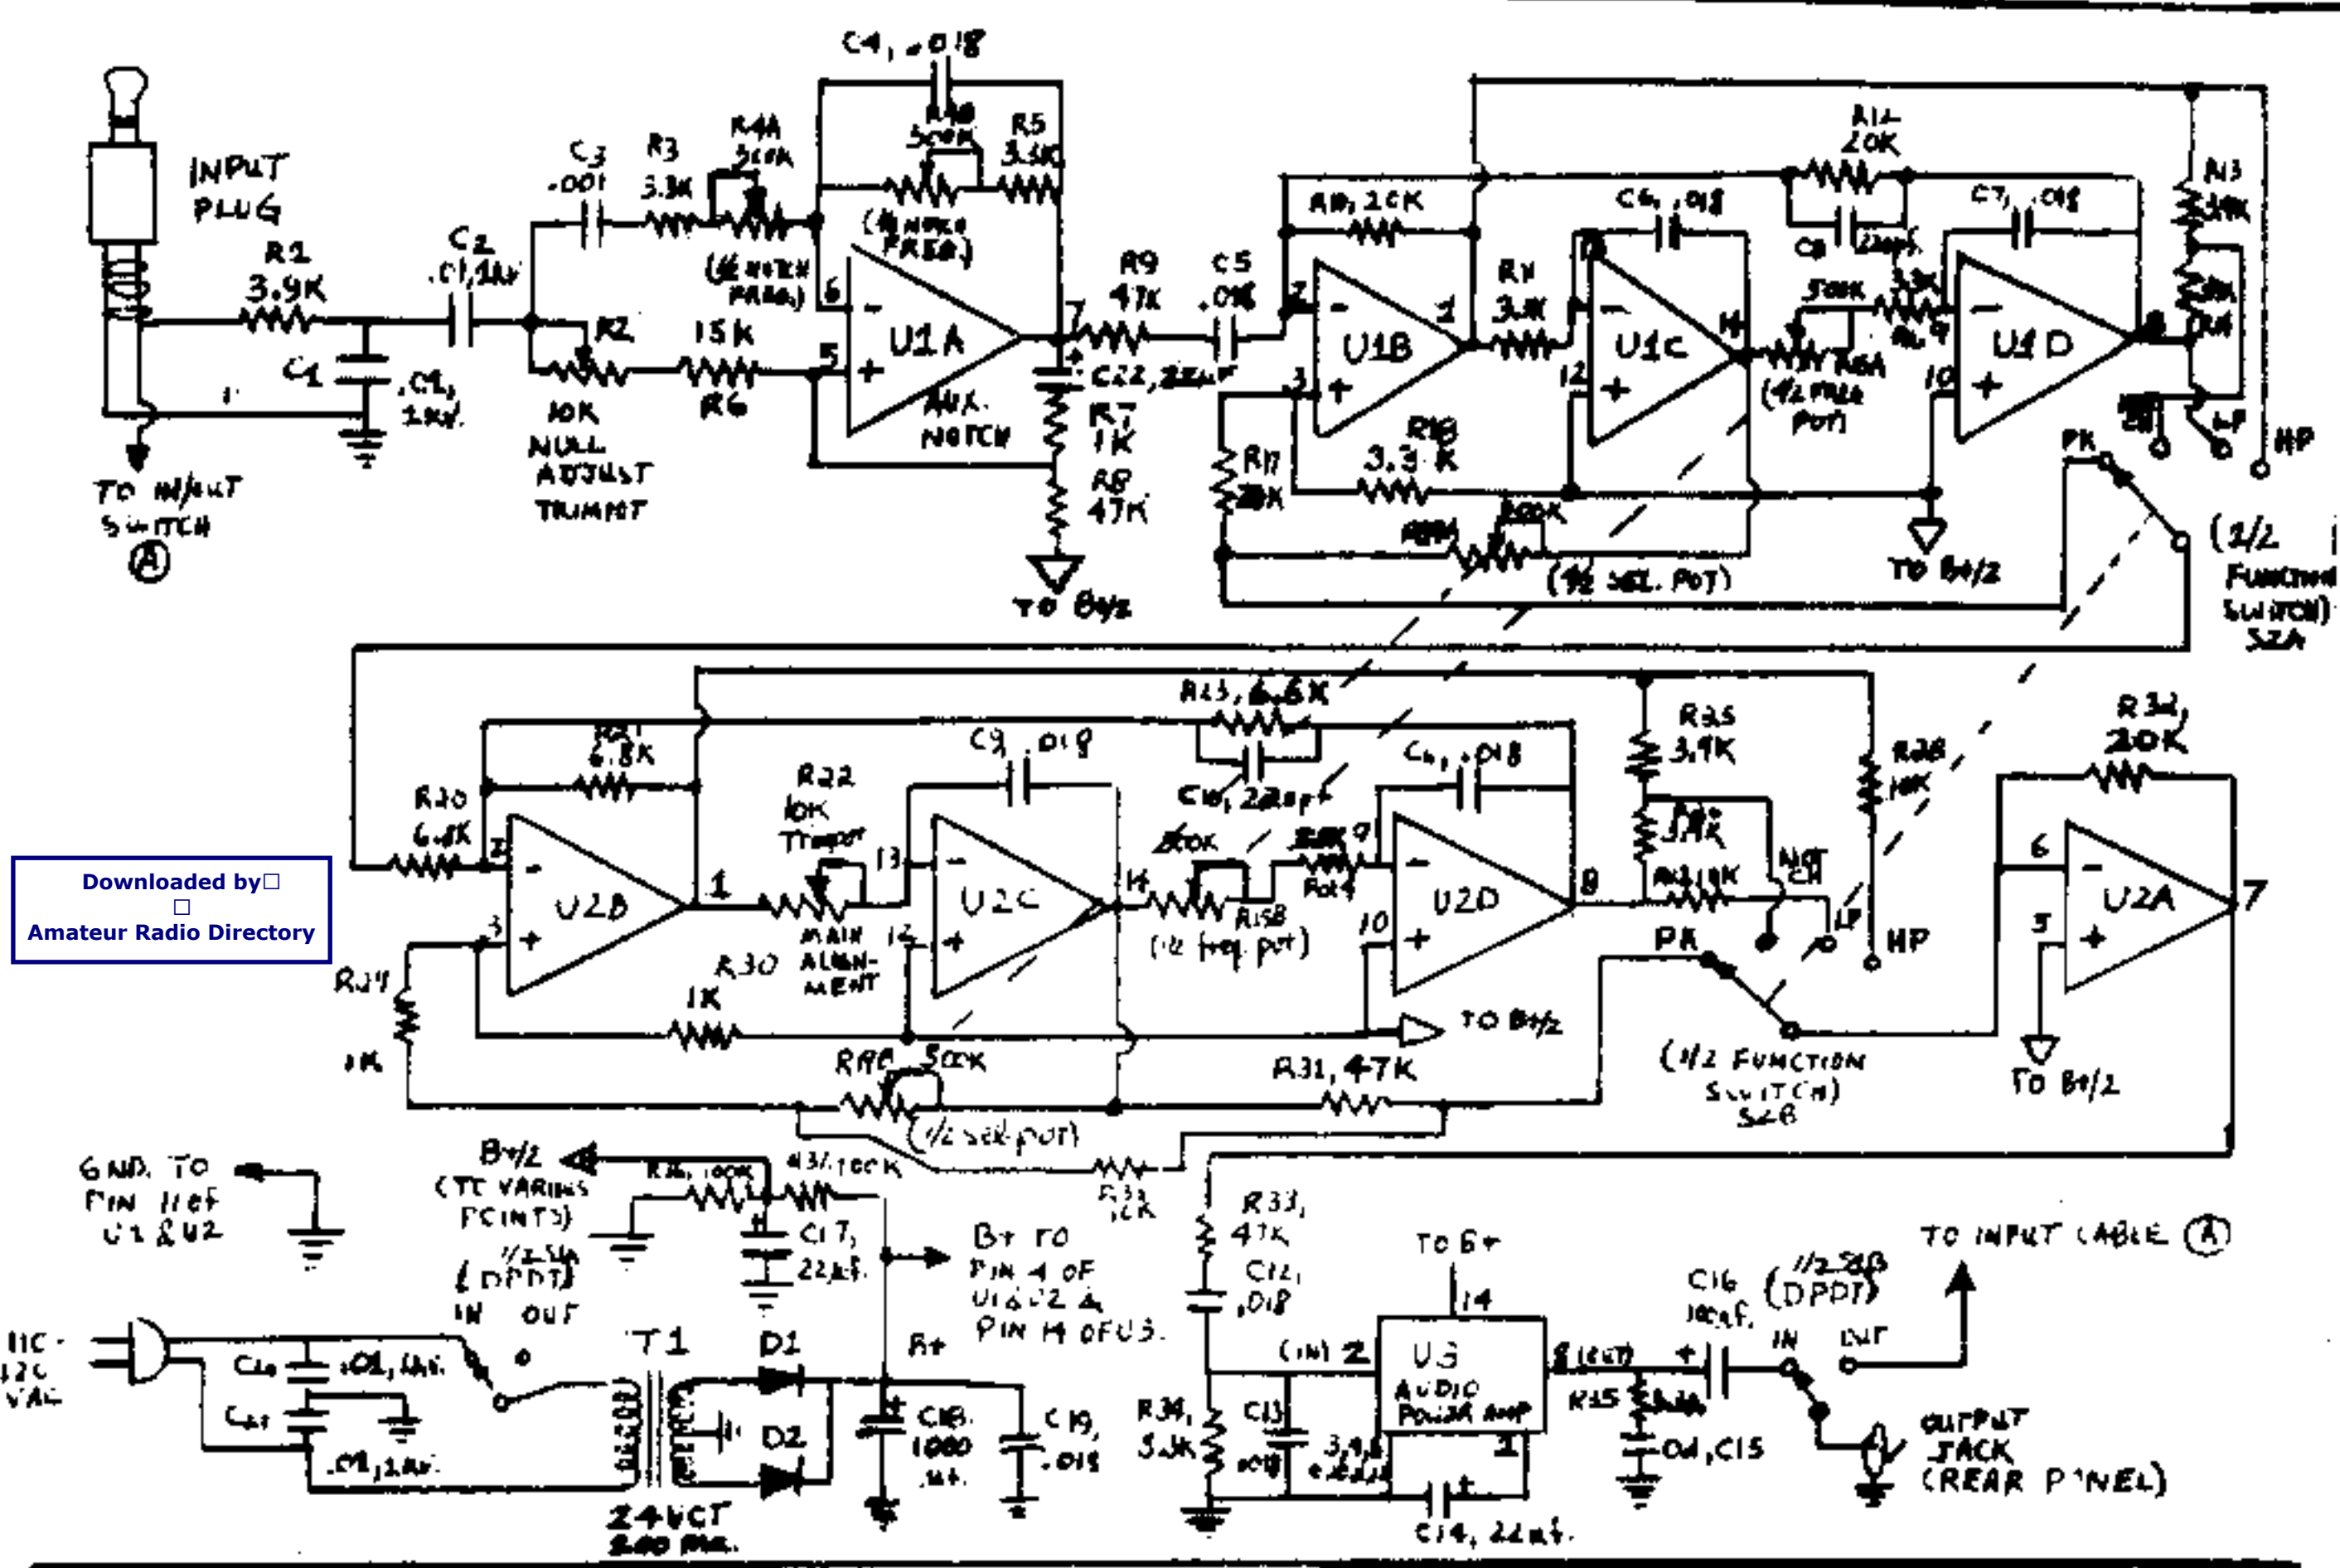

Downloaded by  
Amateur Radio Directory

**SCHEMATIC DIAGRAM.**  
QFI-A ACTIVE AUDIO FILTER.

U1, U2 = LM348N or MC4741 or equiv.  
U3 = LM380  
22K may be substituted for 20K

**WARNING:** Portions of this circuitry are PATENT PENDING. All rights reserved. Commercial violation of patent laws will be prosecuted. © 1980 Autek Research.