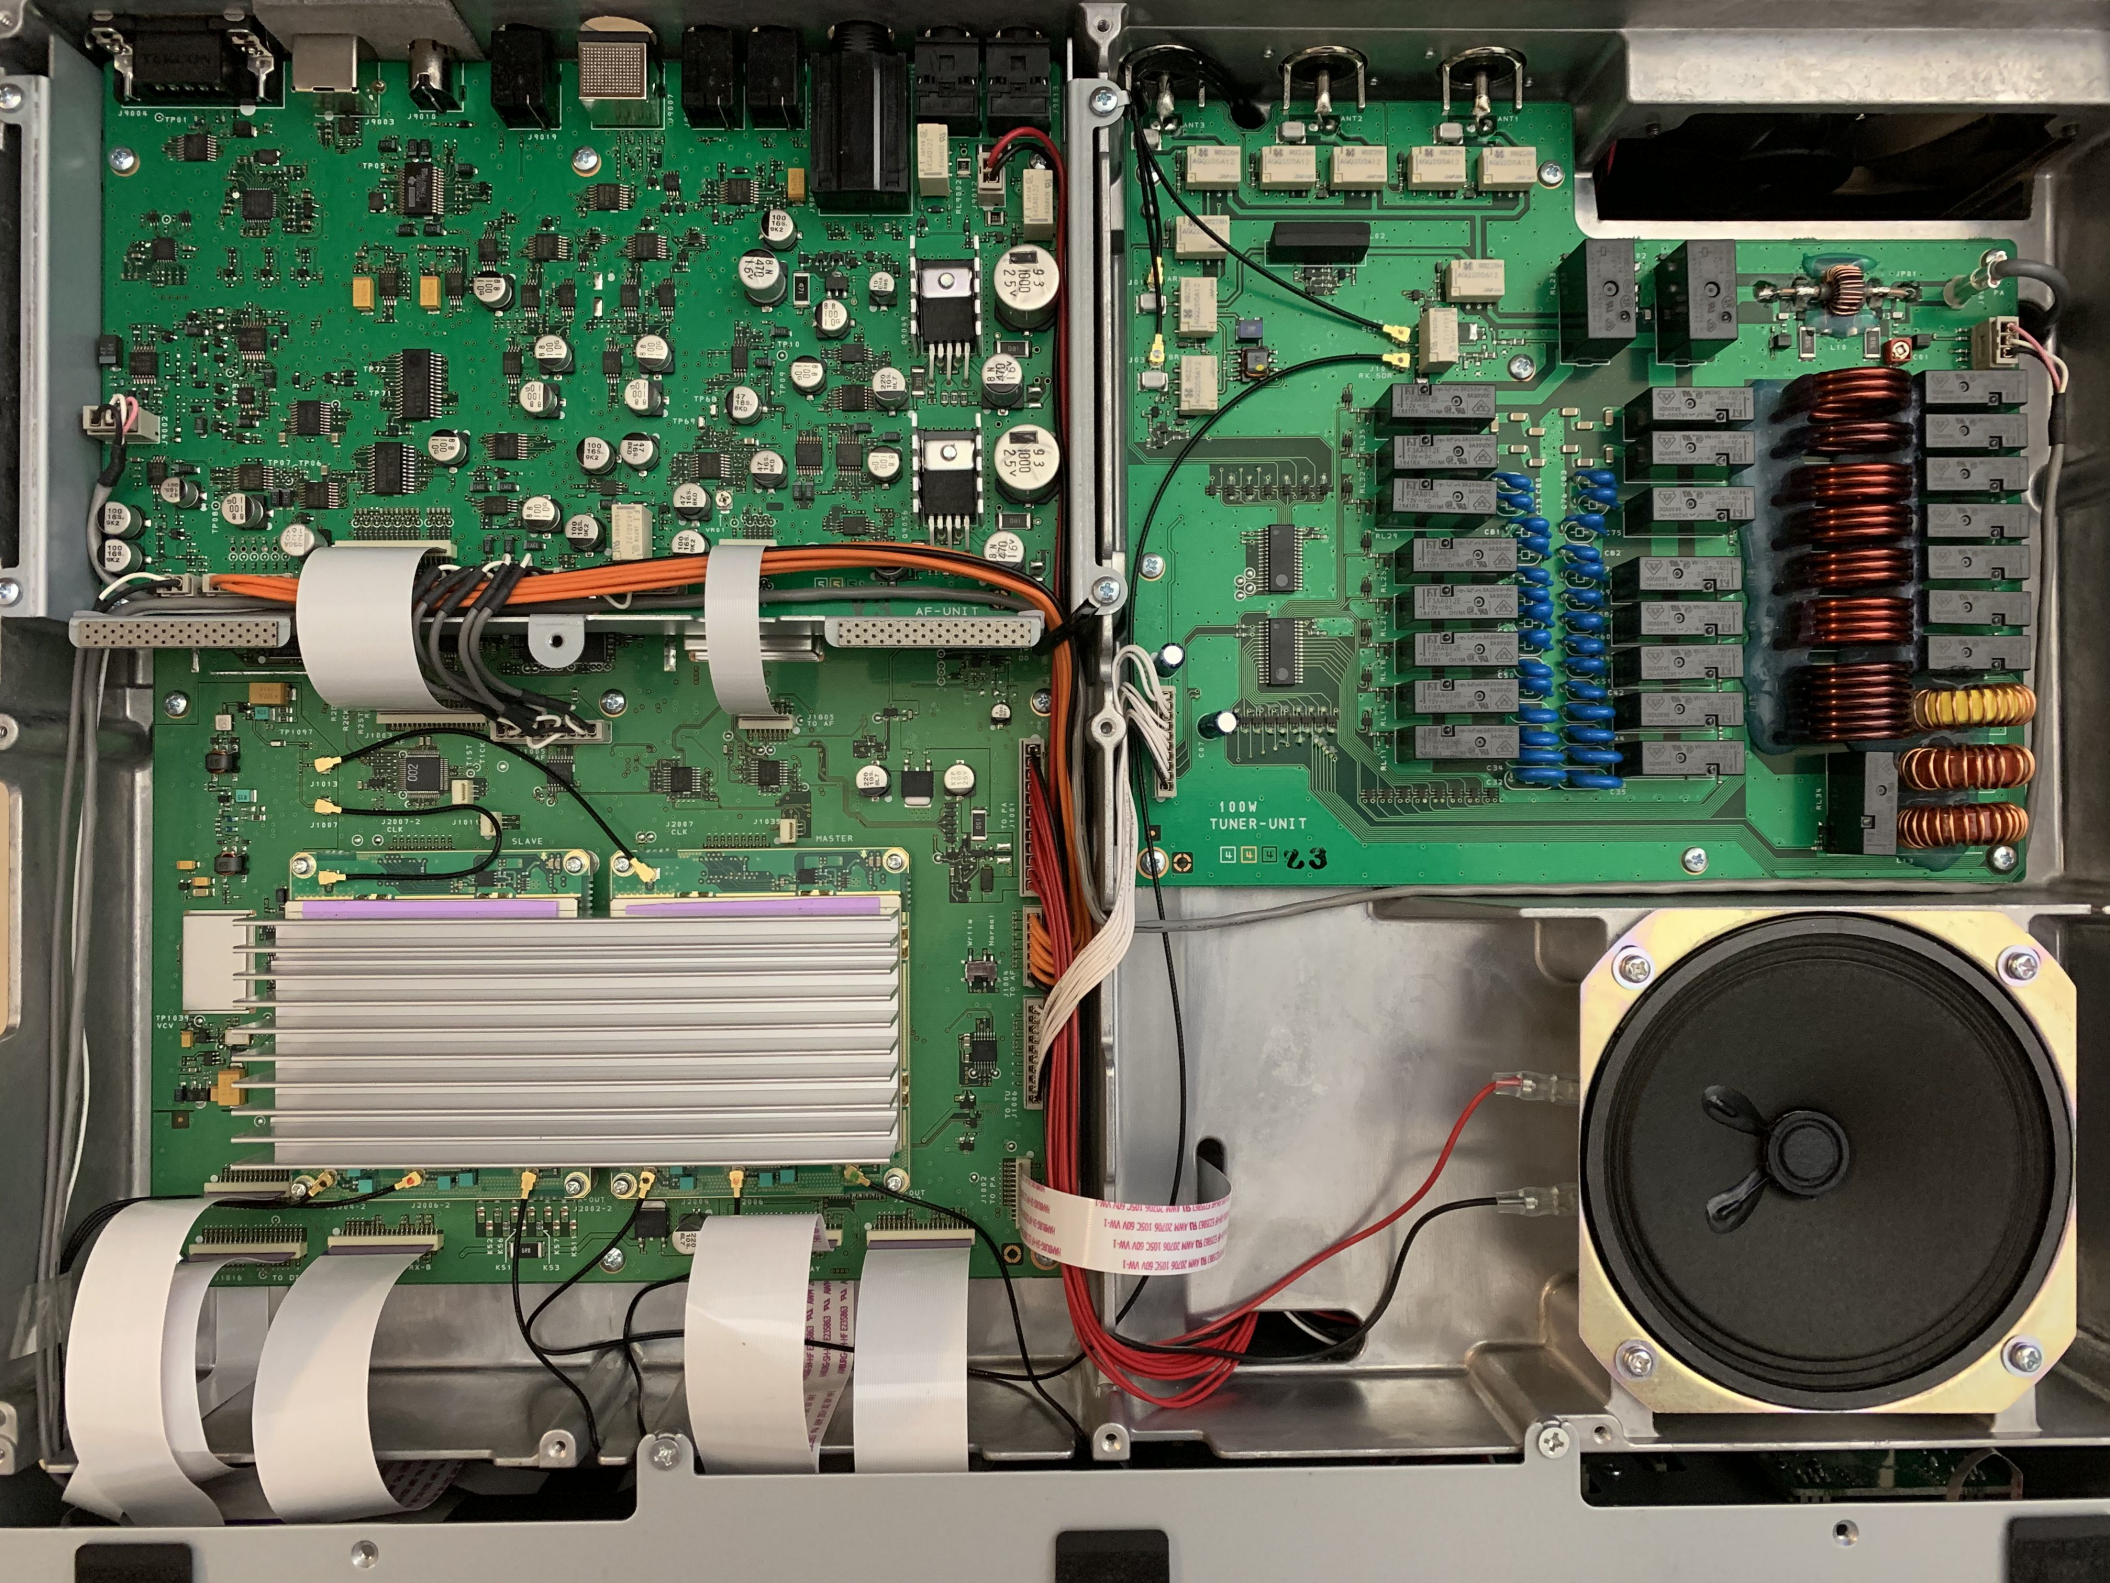
FTDX101D mod enable full TX on the european version

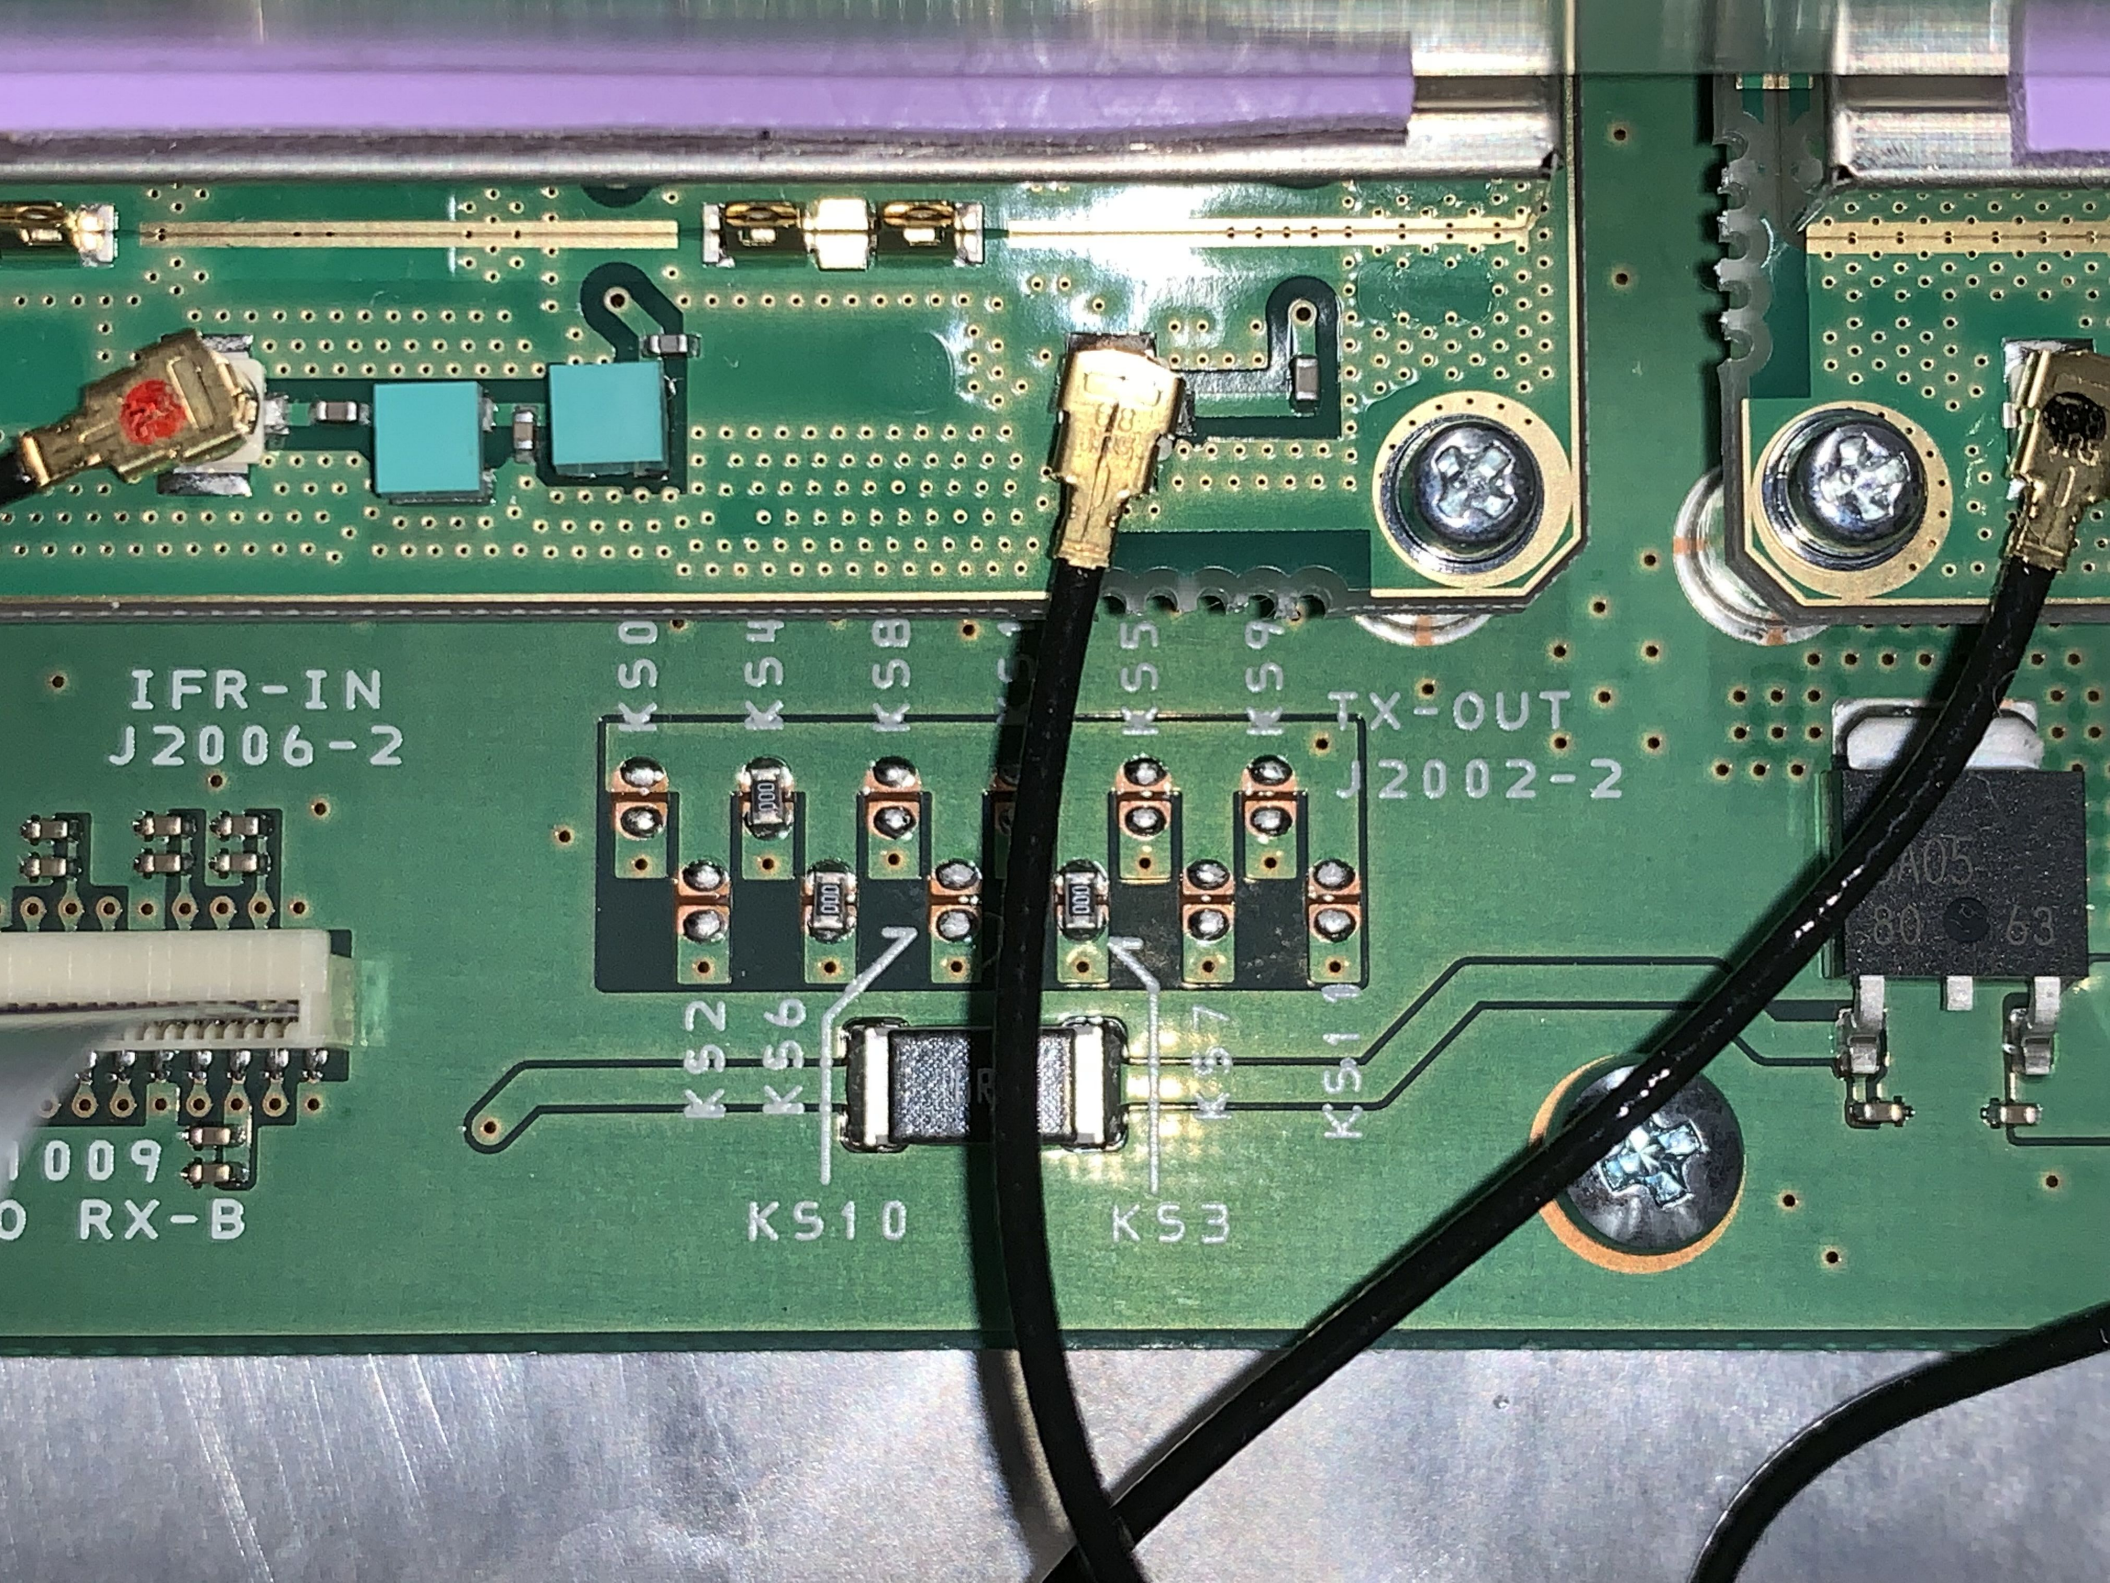
In order to **enable full TX** (including 70MHz) on the **european version** add a 0k “resistor” / solder-bridge on KS5.

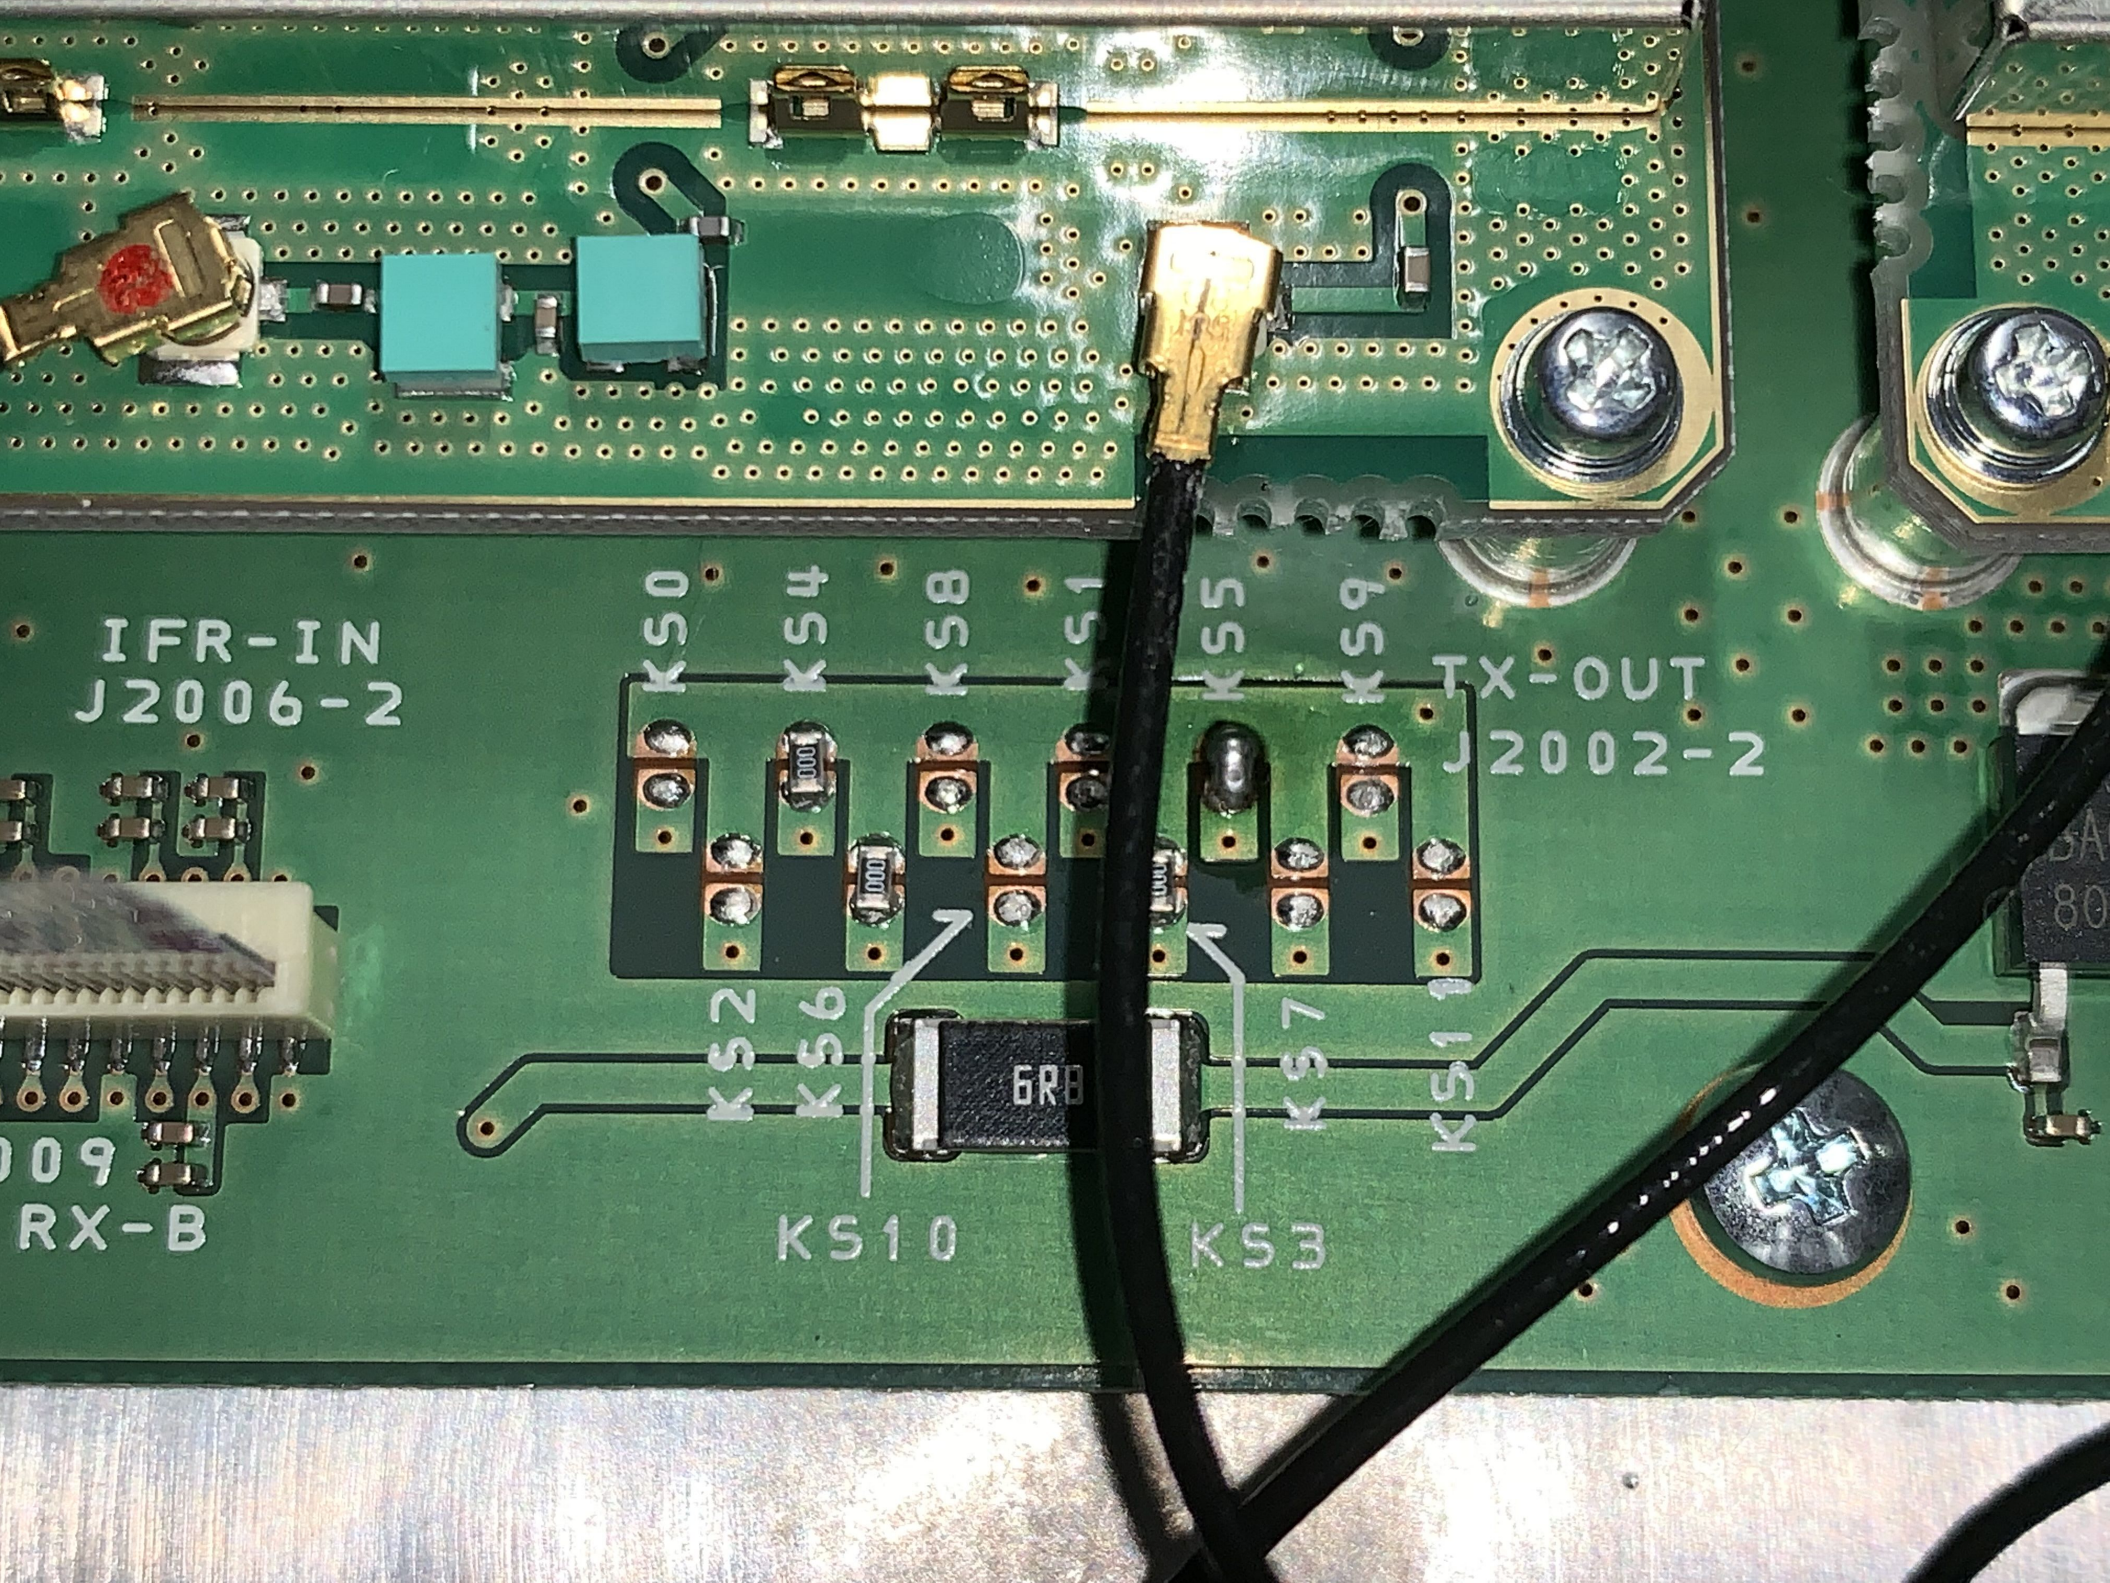
For this you need to remove the top of the radio and under it the second cover.

Directly next to the heatsink you find a matrix called “TX-OUT J2002-2″. KS5 is the second upper right solder point.

You MUST perform a full reset (in the menu) after this to enable the TX modification.


AF-UNIT
100W
TUNER-UNIT
SLAVE
MASTER


IFR-IN
J2006-2
TX-OUT
J2002-2
KS0
KS4
KS8
KS5
KS9
KS2
KS6
KS7
KS1
KS10
KS3
RX-B


IFR-IN
J2006-2
KS0
KS4
KS8
KS1
KS5
KS9
TX-OUT
J2002-2
KS2
KS6
KS7
KS11
6R8
KS10
KS3
009
RX-B