

 **KENWOOD**

**HF LINEAR AMPLIFIER:  
160-10 METER/2KW PEP INPUT**

**TL-922**



# KENWOOD HF LINEAR AMPLIFIER TL-922

The TL-922 is an HF all band linear amp based on the pursuit of complete performance, and employing a pair of 3-500Z high performance transmitting tubes.


## FEATURES

- Employment of high performance transmitting tube, EIMAC 3-500Z
- AB<sub>2</sub> class G-G circuit
- Excellent IMD (intermodulation products distortion) characteristics
- Perfect safety protection


- Newly developed DELAY circuit of blower stop
- Variable threshold level type ALC circuit
- Employment of eye-ease two meters system
- Matching with KENWOOD HF transceivers and transmitters

## SPECIFICATIONS

Frequency Range	160 meter band - 1.8 to 2.0 MHz
	80 meter band - 3.5 to 4.0 MHz
	40 meter band - 7.0 to 7.3 MHz
	20 meter band - 14.0 to 14.35 MHz
	15 meter band - 21.0 to 21.45 MHz
	10 meter band - 28.0 to 29.7 MHz
Mode	SSB, CW, RTTY
Drive Power	80 Watts or more for full output
RF Input Power	SSB: 2,000 Watts PEP
	CW, RTTY: 1,000 Watts DC
Circuitry	AB <sub>2</sub> Class Grounded-grid Linear Amplifier
Input Impedance	50 Ohms
Output Impedance	50 to 75 Ohms
Tubes	2 X 3-500Z
Power Requirement	120/220/240 VAC, 50/60 Hz
Dimension	15-3/8(390)W X 7-1/2(190)H X 16(407)D inch (mm)
Weight	68 lbs. (31 kg)

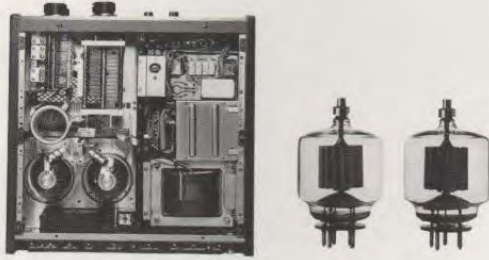

## CIRCUIT DIAGRAM

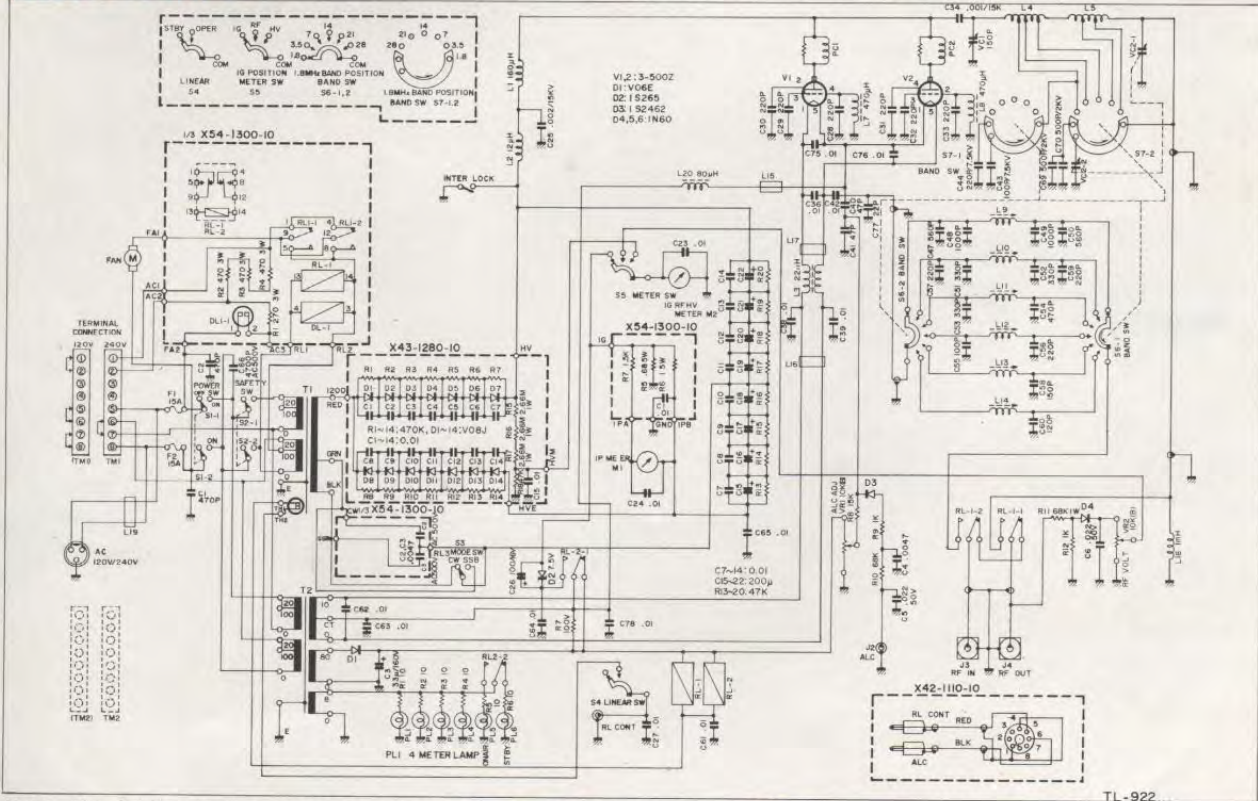

Note: The circuit and ratings may change without notice due to developments in technology.

A product of  
**TRIO-KENWOOD CORPORATION**  
 6-17, 3-chome, Aobadai, Meguro-ku, Tokyo 153, Japan.

771020T Printed in Japan