


- ▲ MOUNTED ON HEATSINK.
- 3 DIODES ARE IN4148.
- 2 CAPACITOR VALUES ARE IN MICROFARADS, 1,000V.
- 1 RESISTOR VALUES ARE IN OHMS, 1/2W, ±10%.

NOTES: UNLESS OTHERWISE SPECIFIED

HEAT TREATMENT		UNLESS OTHERWISE SPECIFIED		SAMPLES OF FIRST ARTICLE PARTS MUST BE APPROVED BY		ROGERS		RHODES R & D ENG. BEFORE STARTING PRODUCTION	
ROCKWELL		FRACTIONS		DWN		T. Rogers		Fender / ROGERS / Rhodes	
		XX ± 1/32		CHK		DATE 5/7/79		CRS MUSICAL INSTRUMENTS - A DIVISION OF CR. INC.	
		ANGLES ± 0.10		APP'D		DATE		P. H. Rogers	
		HOLES ± 0.05		M.A.C.		DATE		MATERIAL	
		FRACTIONS: WOOD ± 1/2		F.P.D.		DATE 9/18/79			
		HOLES: COPED ± 1/16		M.P.D.		DATE			
		BEND: ANGLES ± 1°		M.P.D.		DATE			
		HOLES: DRILLED & PIERCED ± .003-.001		M.P.D.		DATE			
		DRAFT ANGLES ± MAX.		M.P.D.		DATE			
		STRAIGHTNESS		M.P.D.		DATE			
		UNFINISHED ANGLES ARE 90°		M.P.D.		DATE			
		ALL DIMENSIONS ARE IN INCHES		M.P.D.		DATE			
		DO NOT SCALE DRAWING		M.P.D.		DATE			
NEXT ASSY NO.		FINISH TO C.B.S. SPEC.		SCALE		PART NO.		REV	
				12-13-80		D		016817	
								MODEL 300W / 8425	
								NO. PAGE AMP	


07

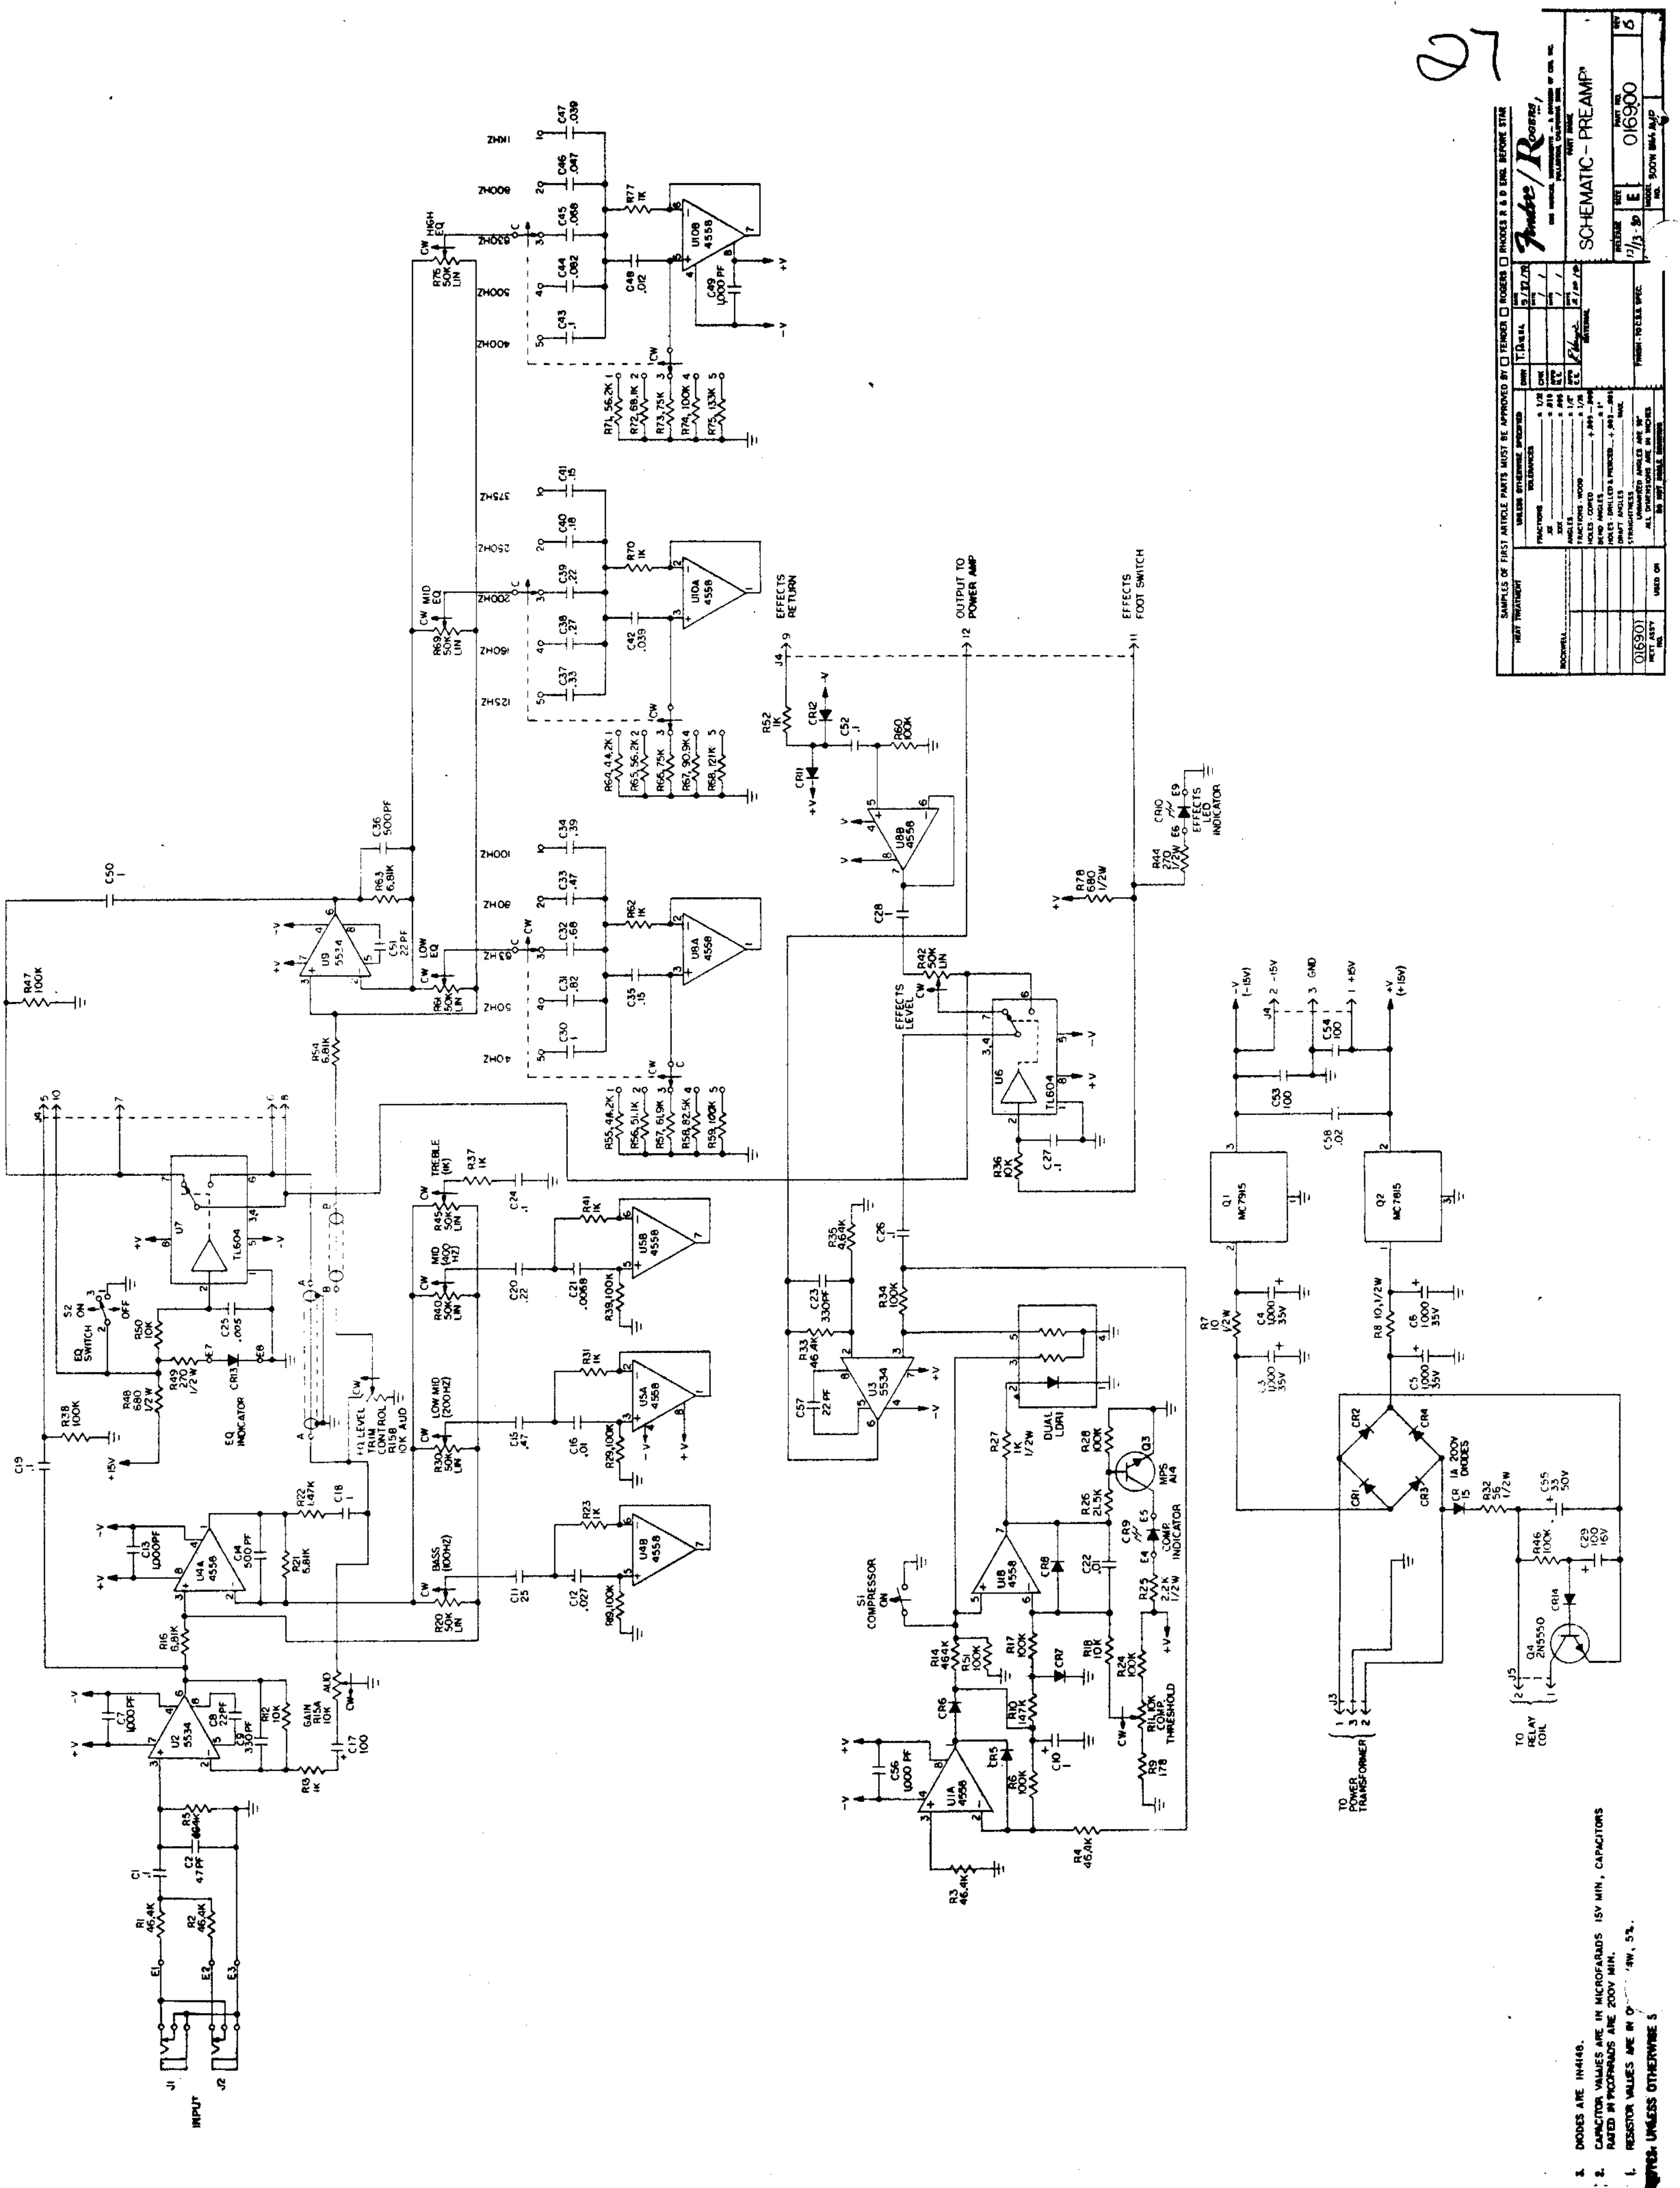

SAMPLES OF FIRST ARTICLE PARTS MUST BE APPROVED BY T. TERRELL, R. D. ENGL, BEFORE STAR	
UNLESS OTHERWISE INDICATED	T. TERRELL
PART NO. 016900	REV. 1
DATE 12/3-80	E
DRAWN BY R. D. ENGL	CHECKED BY R. D. ENGL
DESIGNED BY R. D. ENGL	APPROVED BY R. D. ENGL
TITLE SCHEMATIC - PREAMP	PART NO. 016900
REV. 1	DATE 12/3-80
DRAWN BY R. D. ENGL	CHECKED BY R. D. ENGL
DESIGNED BY R. D. ENGL	APPROVED BY R. D. ENGL

1. DIODES ARE IN4148.
 2. CAPACITOR VALUES ARE IN MICROFARADS 15V MIN., CAPACITORS RATED IN MICROFARADS ARE 200V MIN.
 3. RESISTOR VALUES ARE IN OHMS UNLESS OTHERWISE STATED.

REDUCE TO 14"

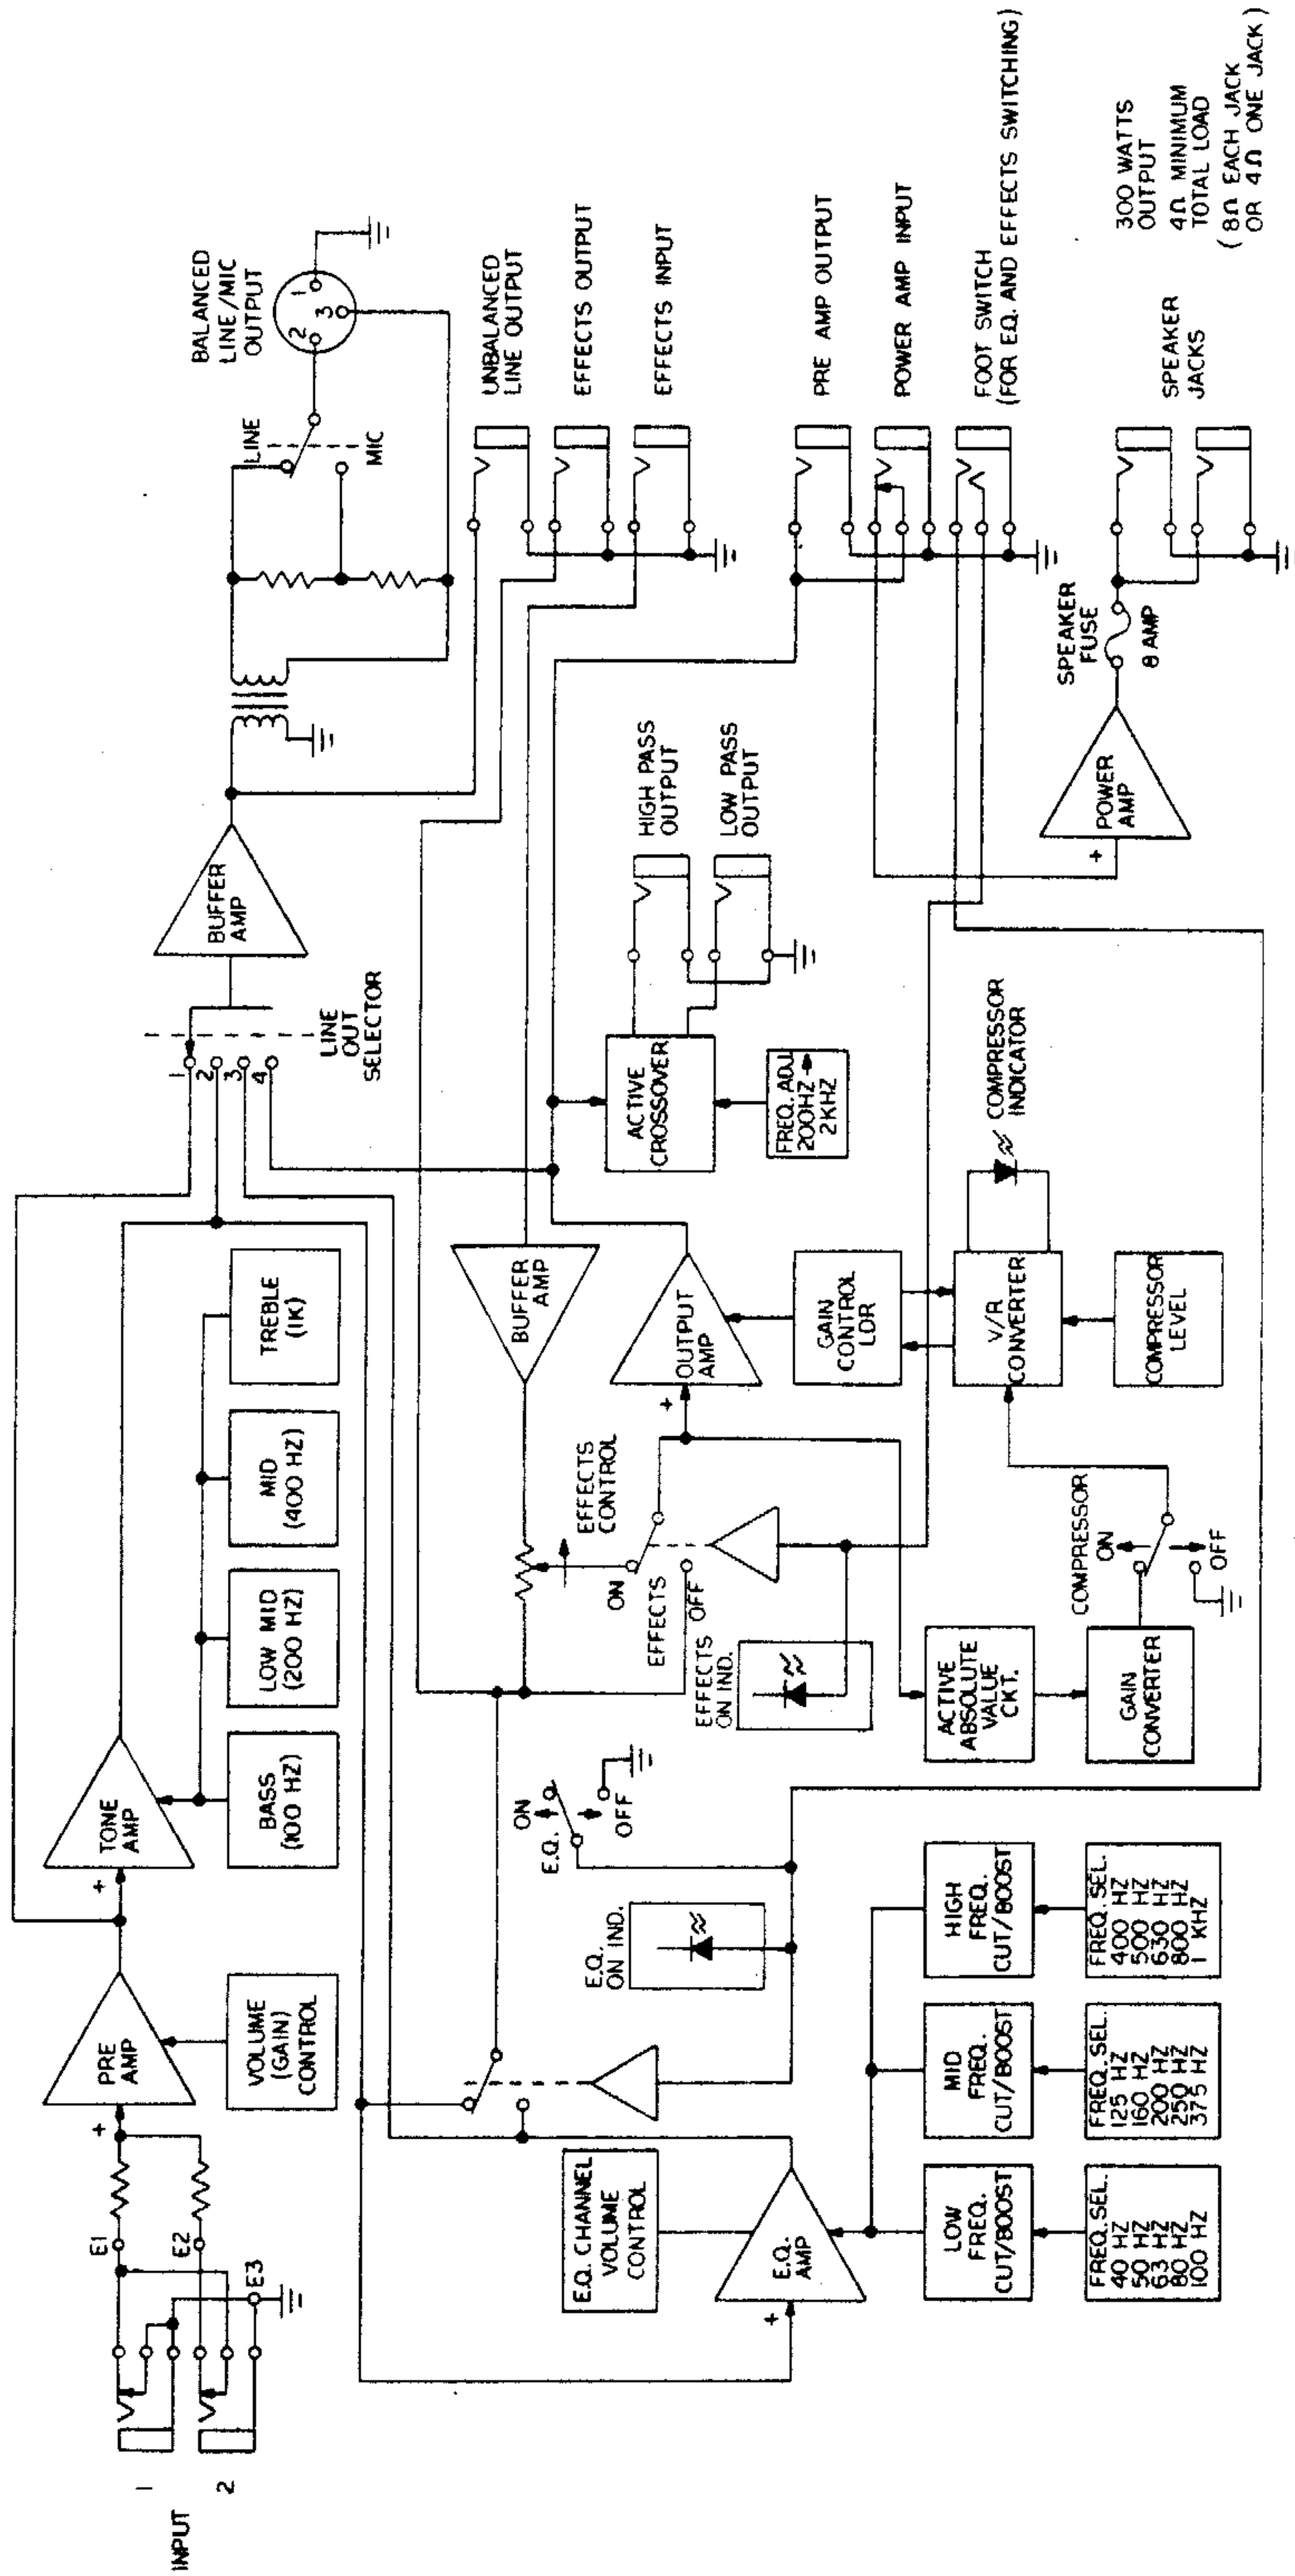

HEAT TREATMENT		UNLESS OTHERWISE SPECIFIED		DIMENSIONS		DATE		REV	
ROOMWELL	USED ON	FRACTIONS	TOLERANCES	DWN	CHK	DATE	DATE	SCALE	MODEL
		.XX	± .010					12-13-60	D
		.XXX	± .005						
		ANGLES	± 1/2°						
		FRACTIONS - WOOD	± 1/16"						
		HOLES - CORED	+ .005 - .000						
		BEND ANGLES	± 1°						
		HOLES - DRILLED & PIERCED	+ .003 - .001						
		DRAFT ANGLES	MAX.						
		STRAIGHTNESS	UNMARKED ANGLES ARE 90°						
			ALL DIMENSIONS ARE IN INCHES						
			NO. PART SCALE DRAWING						


SAMPLES OF FIRST ARTICLE PARTS MUST BE APPROVED BY FENDER ROGERS R & D ENGR. BEFORE STARTING PRODUCTION

Fender/Rhodes
 CBS MUSICAL INSTRUMENTS - A DIVISION OF CBS INC.
 FULLERTON, CALIFORNIA 92631

BLOCK DIAGRAM-300 BASS

FINISH - TO C.B.S. SPEC.

NOTES: UNLESS OTHERWISE SPECIFIED

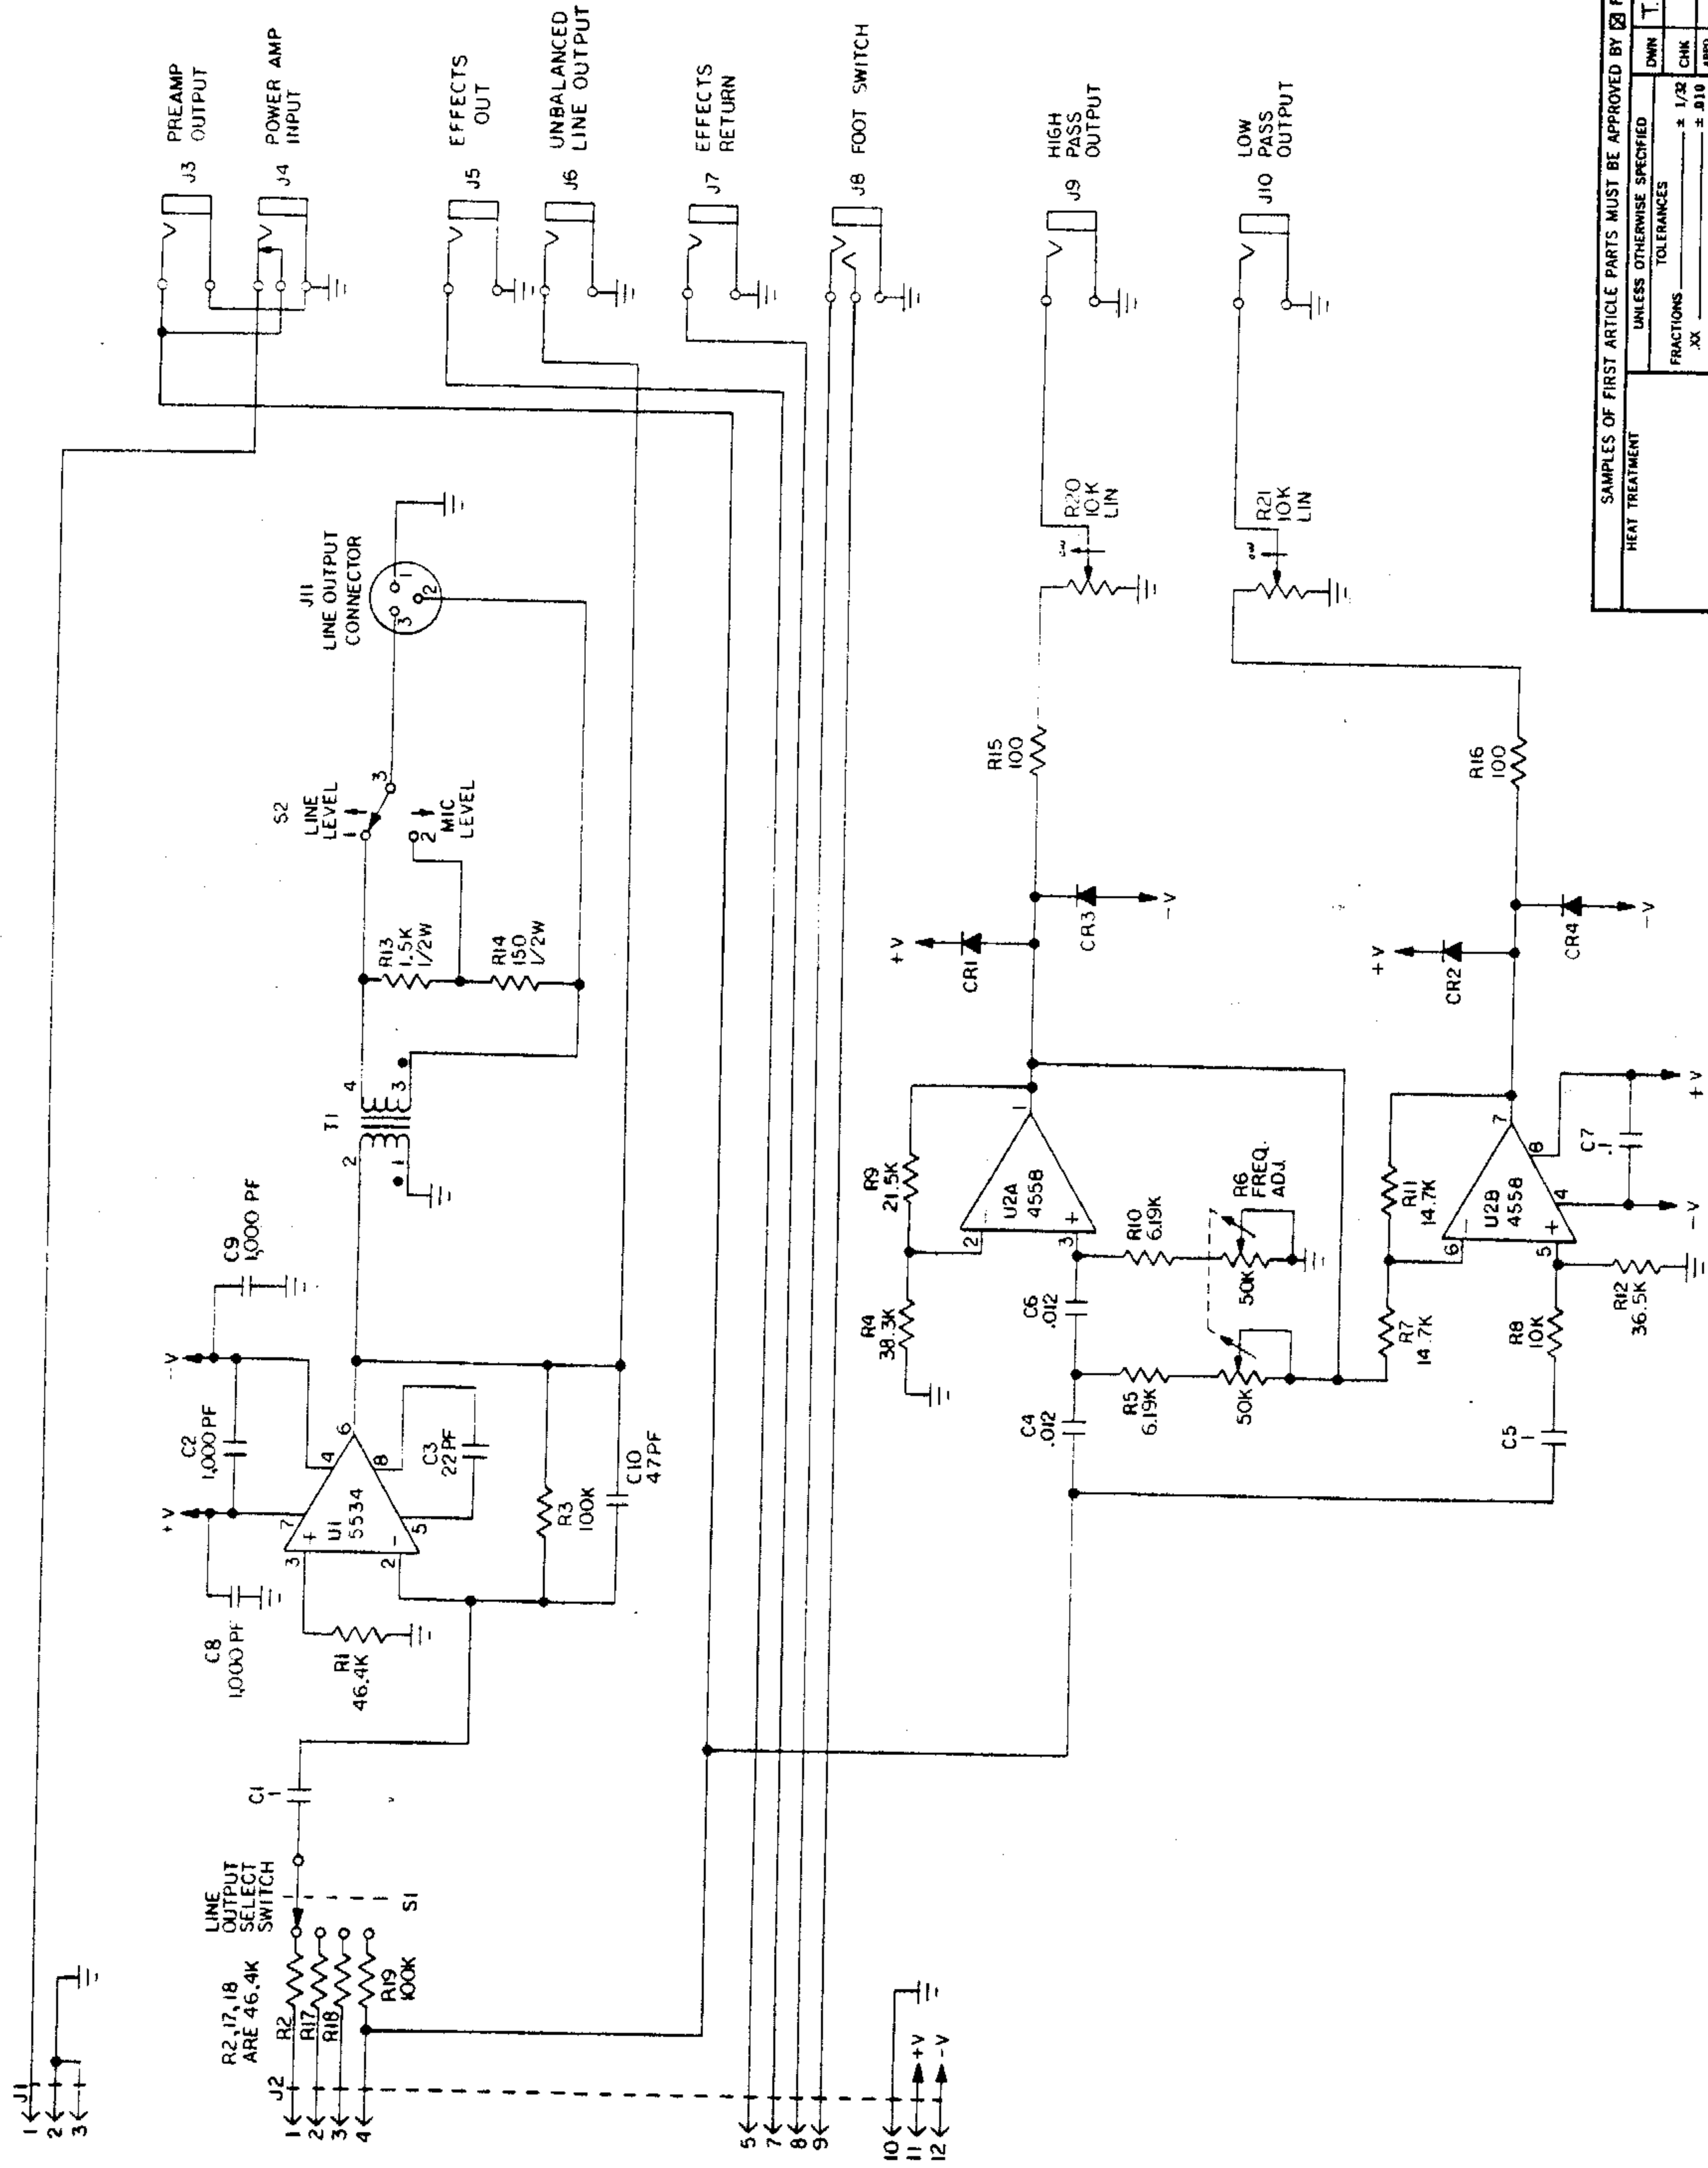

3. DIODES ARE IN4148.
2. CAPACITOR VALUES ARE IN MICROFARADS 30V MIN, CAPACITORS RATED IN PICOFARADS ARE 200V MIN.
1. RESISTOR VALUES ARE IN OHMS, 1/4W, ±1%

NOTES: UNLESS OTHERWISE SPECIFIED

SAMPLES OF FIRST ARTICLE PARTS MUST BE APPROVED BY <input checked="" type="checkbox"/> FENDER <input type="checkbox"/> ROGERS <input type="checkbox"/> RHODES R & D ENG. BEFORE STARTING PRODUCTION	
DWN T. P. 7/22/79 DATE 5/22/79	PART NAME SCHEMATIC - REAR PANEL
UNLESS OTHERWISE SPECIFIED TOLERANCES FRACTIONS ± 1/32 DECIMALS ± .010 ANGLES ± .005 HOLE - CORED ± .005 HOLE - DRILLED & PIERCED ± .003 - .001 BEND ANGLES ± 1° DRAFT ANGLES MAX STRAIGHTNESS UNMARKED ANGLES ARE 9° ALL DIMENSIONS ARE IN INCHES DO NOT SCALE DRAWING	FINISH TO C.B.S. SPEC. 017000 NEXT ASSY NO.
HEAT TREATMENT ROCKWELL C1 C2 C3 C4 C5 C6 C7 C8 C9 C10	USED ON 016999 MODEL 300 W BR 55 AMP
RELEASE 12-13-79	PART NO. 016999
SCALE 1:1	MODEL 300 W BR 55 AMP
SIZE D	PART NO. 016999
MODEL 300 W BR 55 AMP	PART NO. 016999

26