


1 Controls and Connectors


LR-4 Front Panel

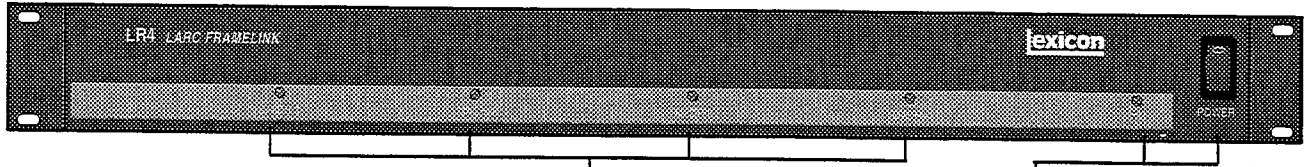

MACH 1-4 LEDs
Indicate which machine is currently selected for LARC control.

Power
Provides front panel control of power on/off. LED lights when power is on.

LR-4 Rear Panel

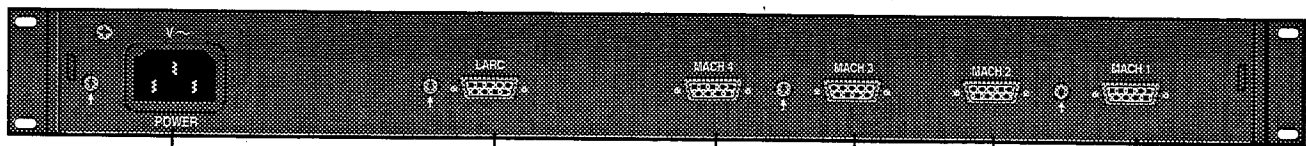

AC Power
Standard 3-pin IEC power connector. 100-115/230V, 50-60Hz internal switches set voltage.


LARC
DE9 connector for interface with LARC (Lexicon Alphanumeric Remote Control).

MACH 1-4
DE9 connectors for interface to LARC ports of Lexicon 224XL, 480L or 300L.

Connection to the LARC should be made via the flexible 50 ft. cable supplied with the LARC. Connection to other Lexicon devices (224XL, 480L and 300L) should be made using a 10 ft Framelink cable, Lexicon Part No. 680-04734.

LR-4 Connections

LR-4 to Mainframe Cable

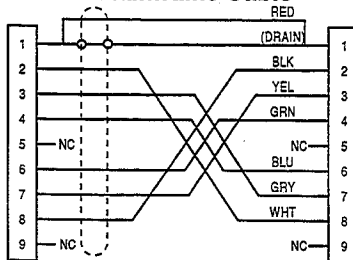

When connecting the LR4 to a mainframe more than 10' away, use proper RS422, shielded 9-conductor cable, wired as shown to two 9-pin D-sub connectors (male).

LR-4 to LARC Cable

