QSC AUDIO AMPLIFIER MODEL 1100

SH-110301-AX

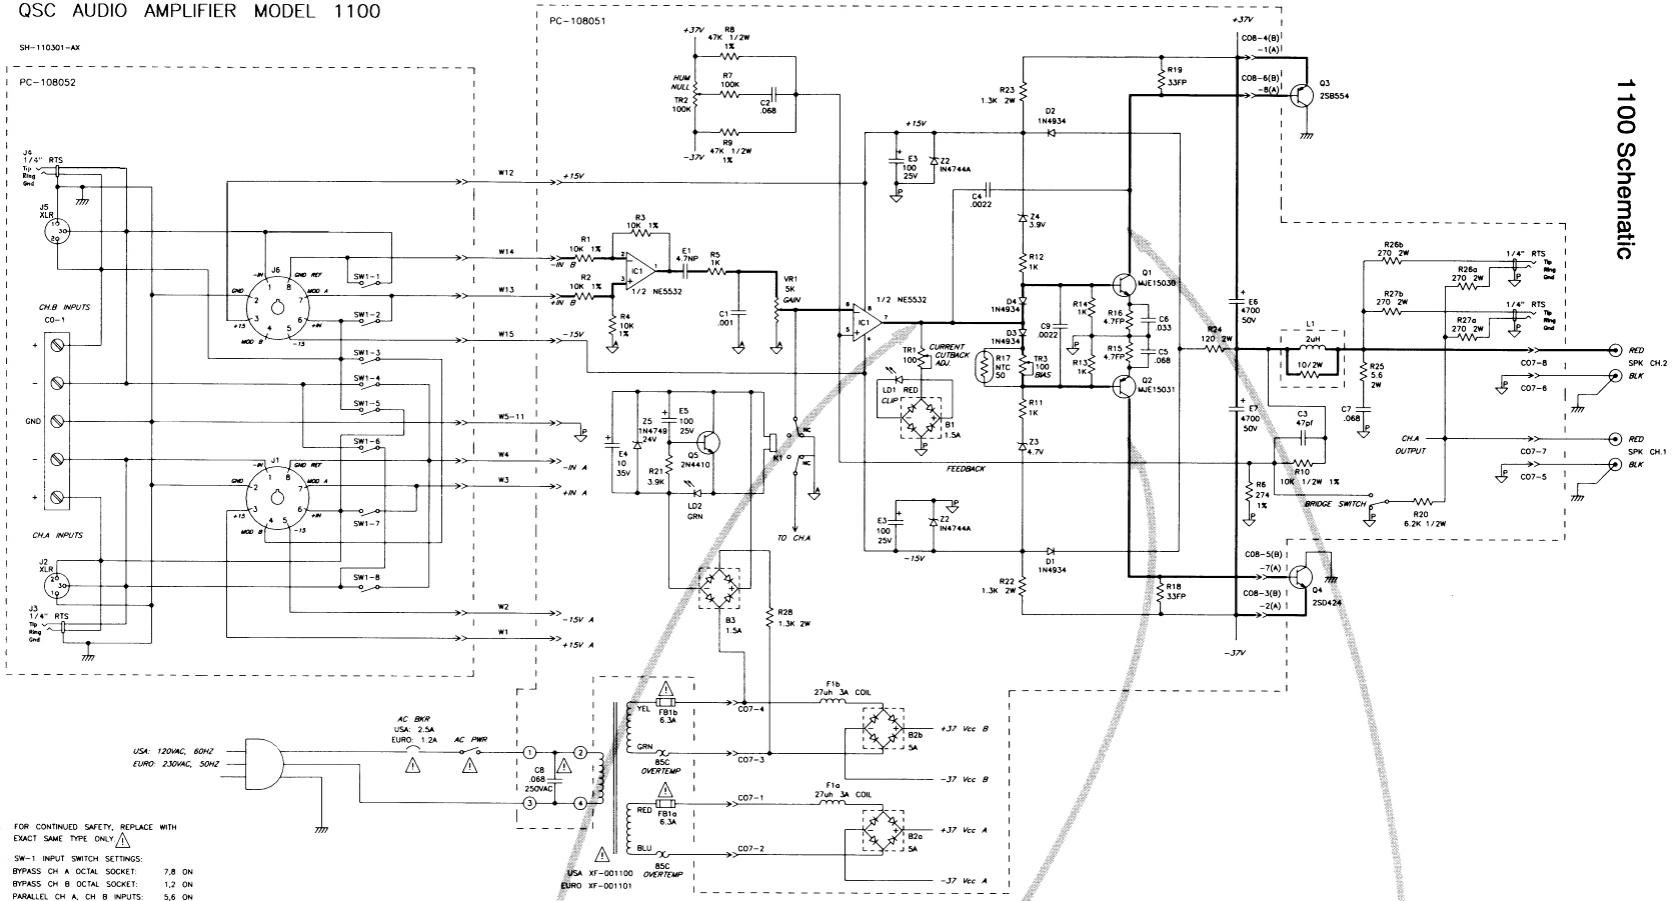

7. FOR CONTINUED SAFETY, REPLACE WITH EXACT SAME TYPE ONLY.
6. SW-1 INPUT SWITCH SETTINGS:
   BYPASS CH A OCTAL SOCKET: 7,8 ON
   BYPASS CH B OCTAL SOCKET: 1,2 ON
   PARALLEL CH A, CH B INPUTS: 5,6 ON
   CONNECT CH A OCTAL TO CH B: 3,4 ON
5. BOTH CHANNELS ARE THE SAME EXCEPT BRIDGING SWITCH. (CHANNEL B SHOWN)
4. USE QSC REPLACEMENT TRANSISTORS ONLY.
3. "FP" = FLAME PROOF RESISTOR. FOR CONTINUED SAFETY, REPLACE WITH SAME TYPE ONLY.
2. ALL CAPACITORS ARE IN uf. 100V. UNLESS NOTED.
1. ALL RESISTORS ARE 1/4W, 5% UNLESS NOTED.
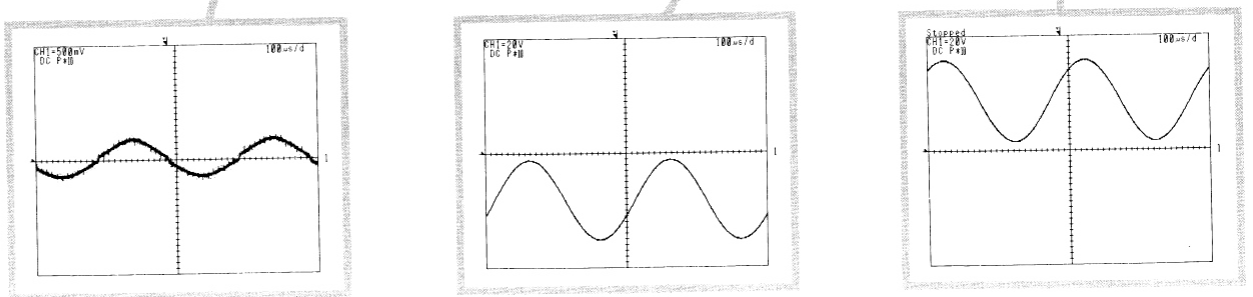
NOTES: UNLESS OTHERWISE SPECIFIED.