


REFS LAST USED	
C901	M1
D903	Q904
F1	R907
I4	S1
K2	T4

P/N	DESC	QTY
48190	COVER	1
8994	SCREW, #0 4	5
39822	SCREW, # 32 X 1/2	4
85-25	HEX NUT # 12	4
48275	CHASSIS ASSY	1
48102	FRONT PANEL ASSY	1
48175	CAUTION LABEL	2
48227	SWITCH ASSY, NEG. 1	1
48228	SWITCH ASSY, POS. 1	1
87157	FOOT	4

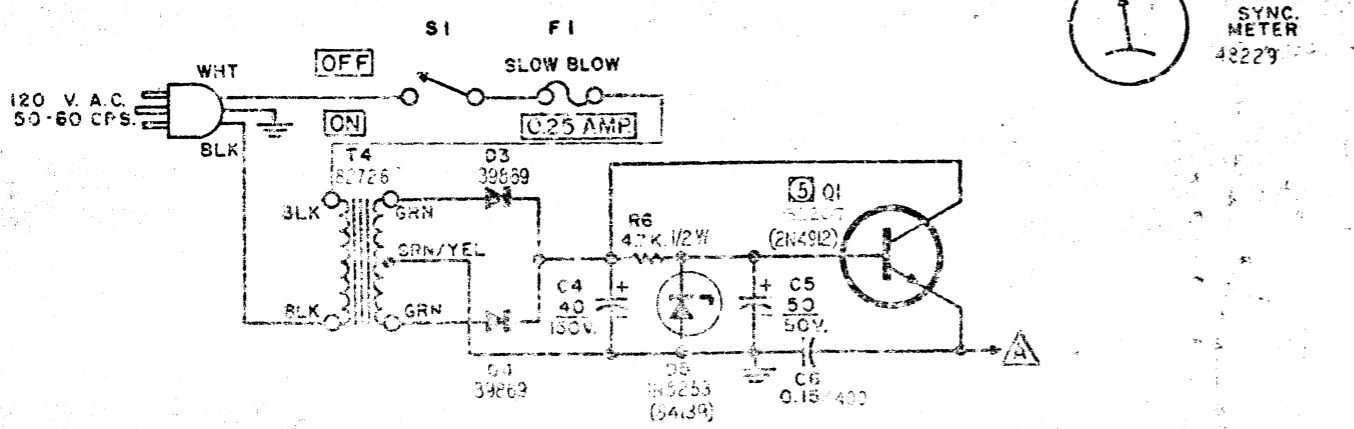

6. SEE 47676 REF. FOR TEST SPECIFICATIONS.
5. TRANSISTOR Q1 MAY BE REPLACED WITH A 2N4912 FOR FIELD REPAIR.
 JBL PART # 2N4912 CANNOT BE SUBSTITUTED FOR A 2N4912 IN OTHER JBL PRODUCTS.
4. ALL DIODES EXCEPT D3 ARE SOLITRON CER 99, 750 MA, 200 PIV.
3. JBL RESERVES THE RIGHT TO MAKE MINOR COMPONENT CHANGES WITHOUT NOTICE.
2. CAPACITORS IN UFD. THOSE OVER 1 UFD ARE POLARIZED ELECTROLYTICS AS SHOWN.
1. RESISTORS IN OHMS, 1/4 W, 5%.
- NOTES, UNLESS SPECIFIED:

OBsolete

OBsolete
 REA SPR 1074

7125

MFD ITEM 7125