## PRE-AMPLIFIER AF 37

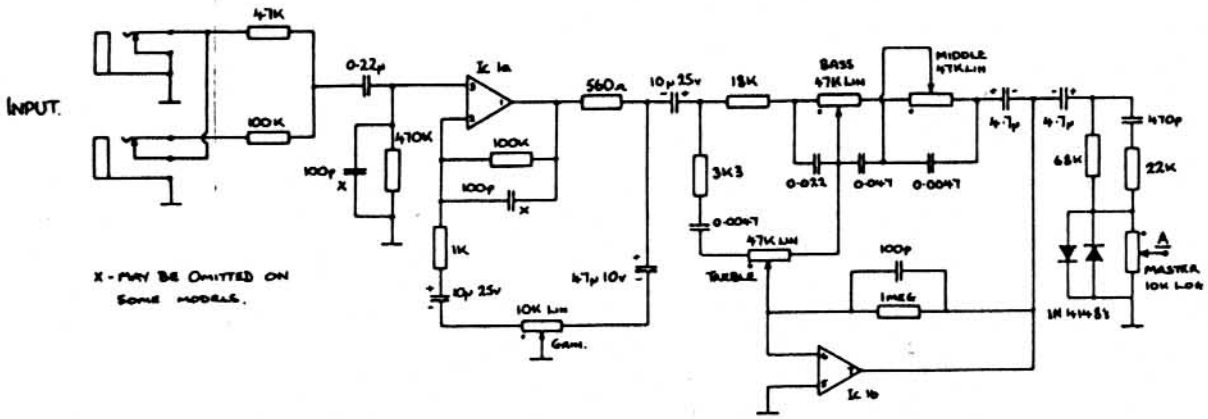


## REVERB SECTION AF 37

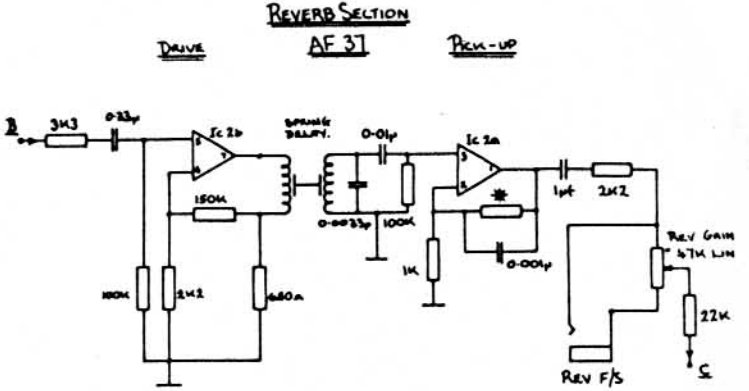


## POWER AMPLIFIER AF 37

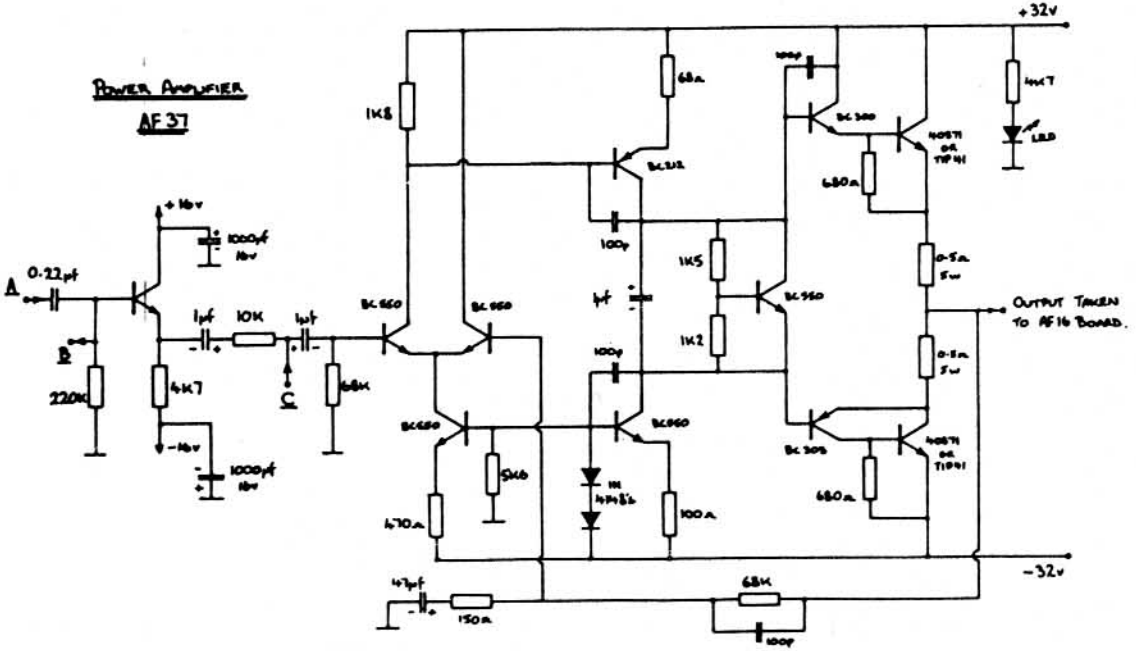


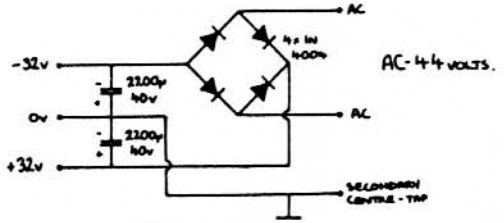


## POWER SUPPLY UNIT AF35

Vox Venue Lead 30 - 1984

NOTES:-

1 * - THE VALUE OF THIS RESISTOR IS DEPENDANT ON THE TYPE OF SPRING DELAY USED. SOME BOARDS MAY HAVE A 4K7 SKELETON PRE-SET.
2 ALL IC's ARE 4558 DUAL OPERATIONAL AMPLIFIERS.
3 ±16VOLT SUPPLY FOR PRE-AMP IS OBTAINED THROUGH 2 1KΩ ½ WATT RESISTORS WITH 2 16v ZENER DIODES (BZX 61 C-16) TO EARTH TO GIVE LOW CURRENT REGULATION. SUPPLY OMITTED FOR CLARITY. ALSO, THERE ARE 2 0·1µf CAPACITORS BETWEEN SUPPLY LINES AND 0v.
4 BC 550's MAY BE BC 182's OR 1713's.