

# GUITAR


## PEAVEY RECOMMENDED SETUP SPECIFICATIONS

9/1/78

<b>NECK BOW</b> (SEE FIG. 1-A)*	BETWEEN .012" AND .015" IDEAL UP TO .031" MAXIMUM
<b>STRING HEIGHT</b> AT 12th.FRET (SEE FIG. 2)	1st. THRU 5th. STRINGS ..... 1/16" 6th. STRING ..... 5/64"
<b>PICKUP CLEARANCE</b> FRETTED AT 21st. FRET AND MEASURED UNDER 1st. AND 6th. STRINGS (SEE FIG. 3)	NECK PICKUP ..... 3/64" BRIDGE PICKUP ..... 1/32"
<b>INTONATION</b> SHALL BE SET AS DESCRIBED IN BULLETIN # 80390003	WITHIN 1 CYCLE PER SECOND
<b>BODY/NECK CLEARANCE GAP</b> (SEE FIG. 4)	LESS THAN .030" EITHER SIDE
<b>STRING/FINGERBOARD EDGE MARGIN</b> (SEE FIG. 4)	1/8" AT THE 21st. FRET
<b>STRING SPACING AT TOPNUT</b> (SEE FIG. 5)	.266" CENTER-TO-CENTER
<b>STRING HEIGHT AT 1st. FRET</b> (SEE FIG. 2)	.020" IDEAL
<b>FRET SURFACE PROJECTION OVER BRIDGE</b> (SEE FIG. 6)	17/64" TO 5/16" OVER FRONT RIM OF BRIDGE. (MAY VARY WITH INSTRUMENT)

STRING	NOTE	GAUGE(INCH)	FREQUENCY (CYCLES PER SECOND)	TENSION (lbs.)
<b>1</b>	<b>E</b>	.010	329.63	25.28
<b>2</b>	<b>B</b>	.013	246.94	21.28
<b>3</b>	<b>G</b>	.017	196.00	22.34
<b>4</b>	<b>D</b>	.026w	146.83	22.57
<b>5</b>	<b>A</b>	.036w	110.00	22.51
<b>6</b>	<b>E</b>	.046w	82.41 (82.407)	20.14

PRINTED IN U.S.A.

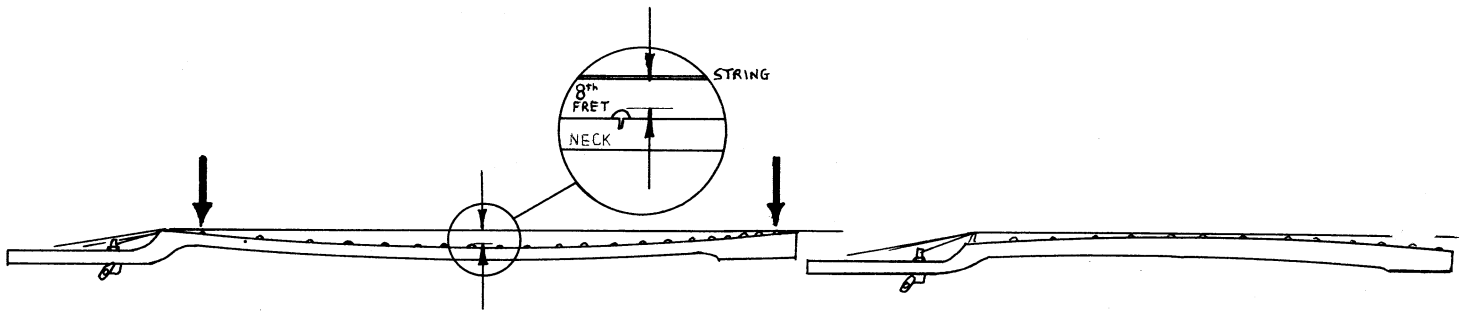

POSITIVE BOW EXAGGERATED  
FIGURE 1-A

BACK BOW (INCORRECT)  
FIGURE 1-B

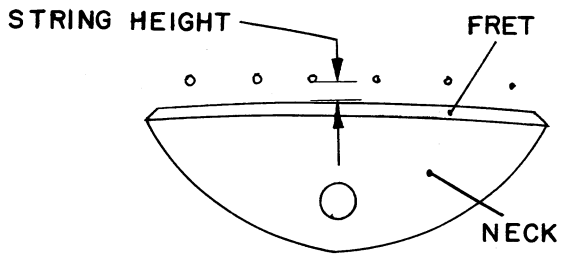


FIGURE 2

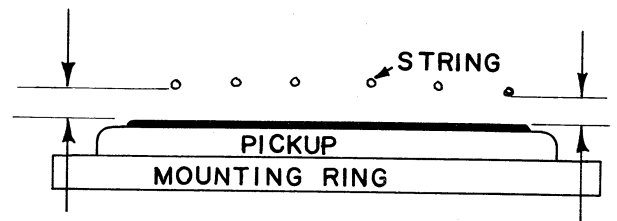


FIGURE 3

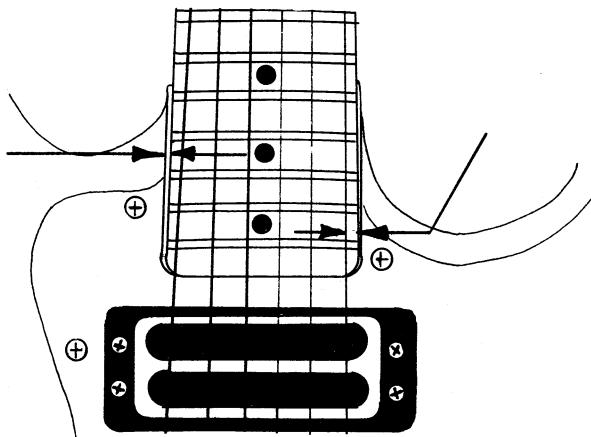


FIGURE 4

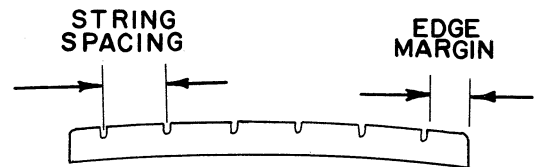


FIGURE 5

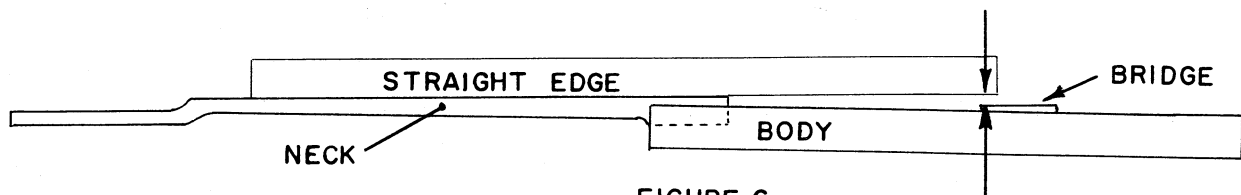



FIGURE 6