


HERITAGE

V.T.X. SERIES
BD # 99001630

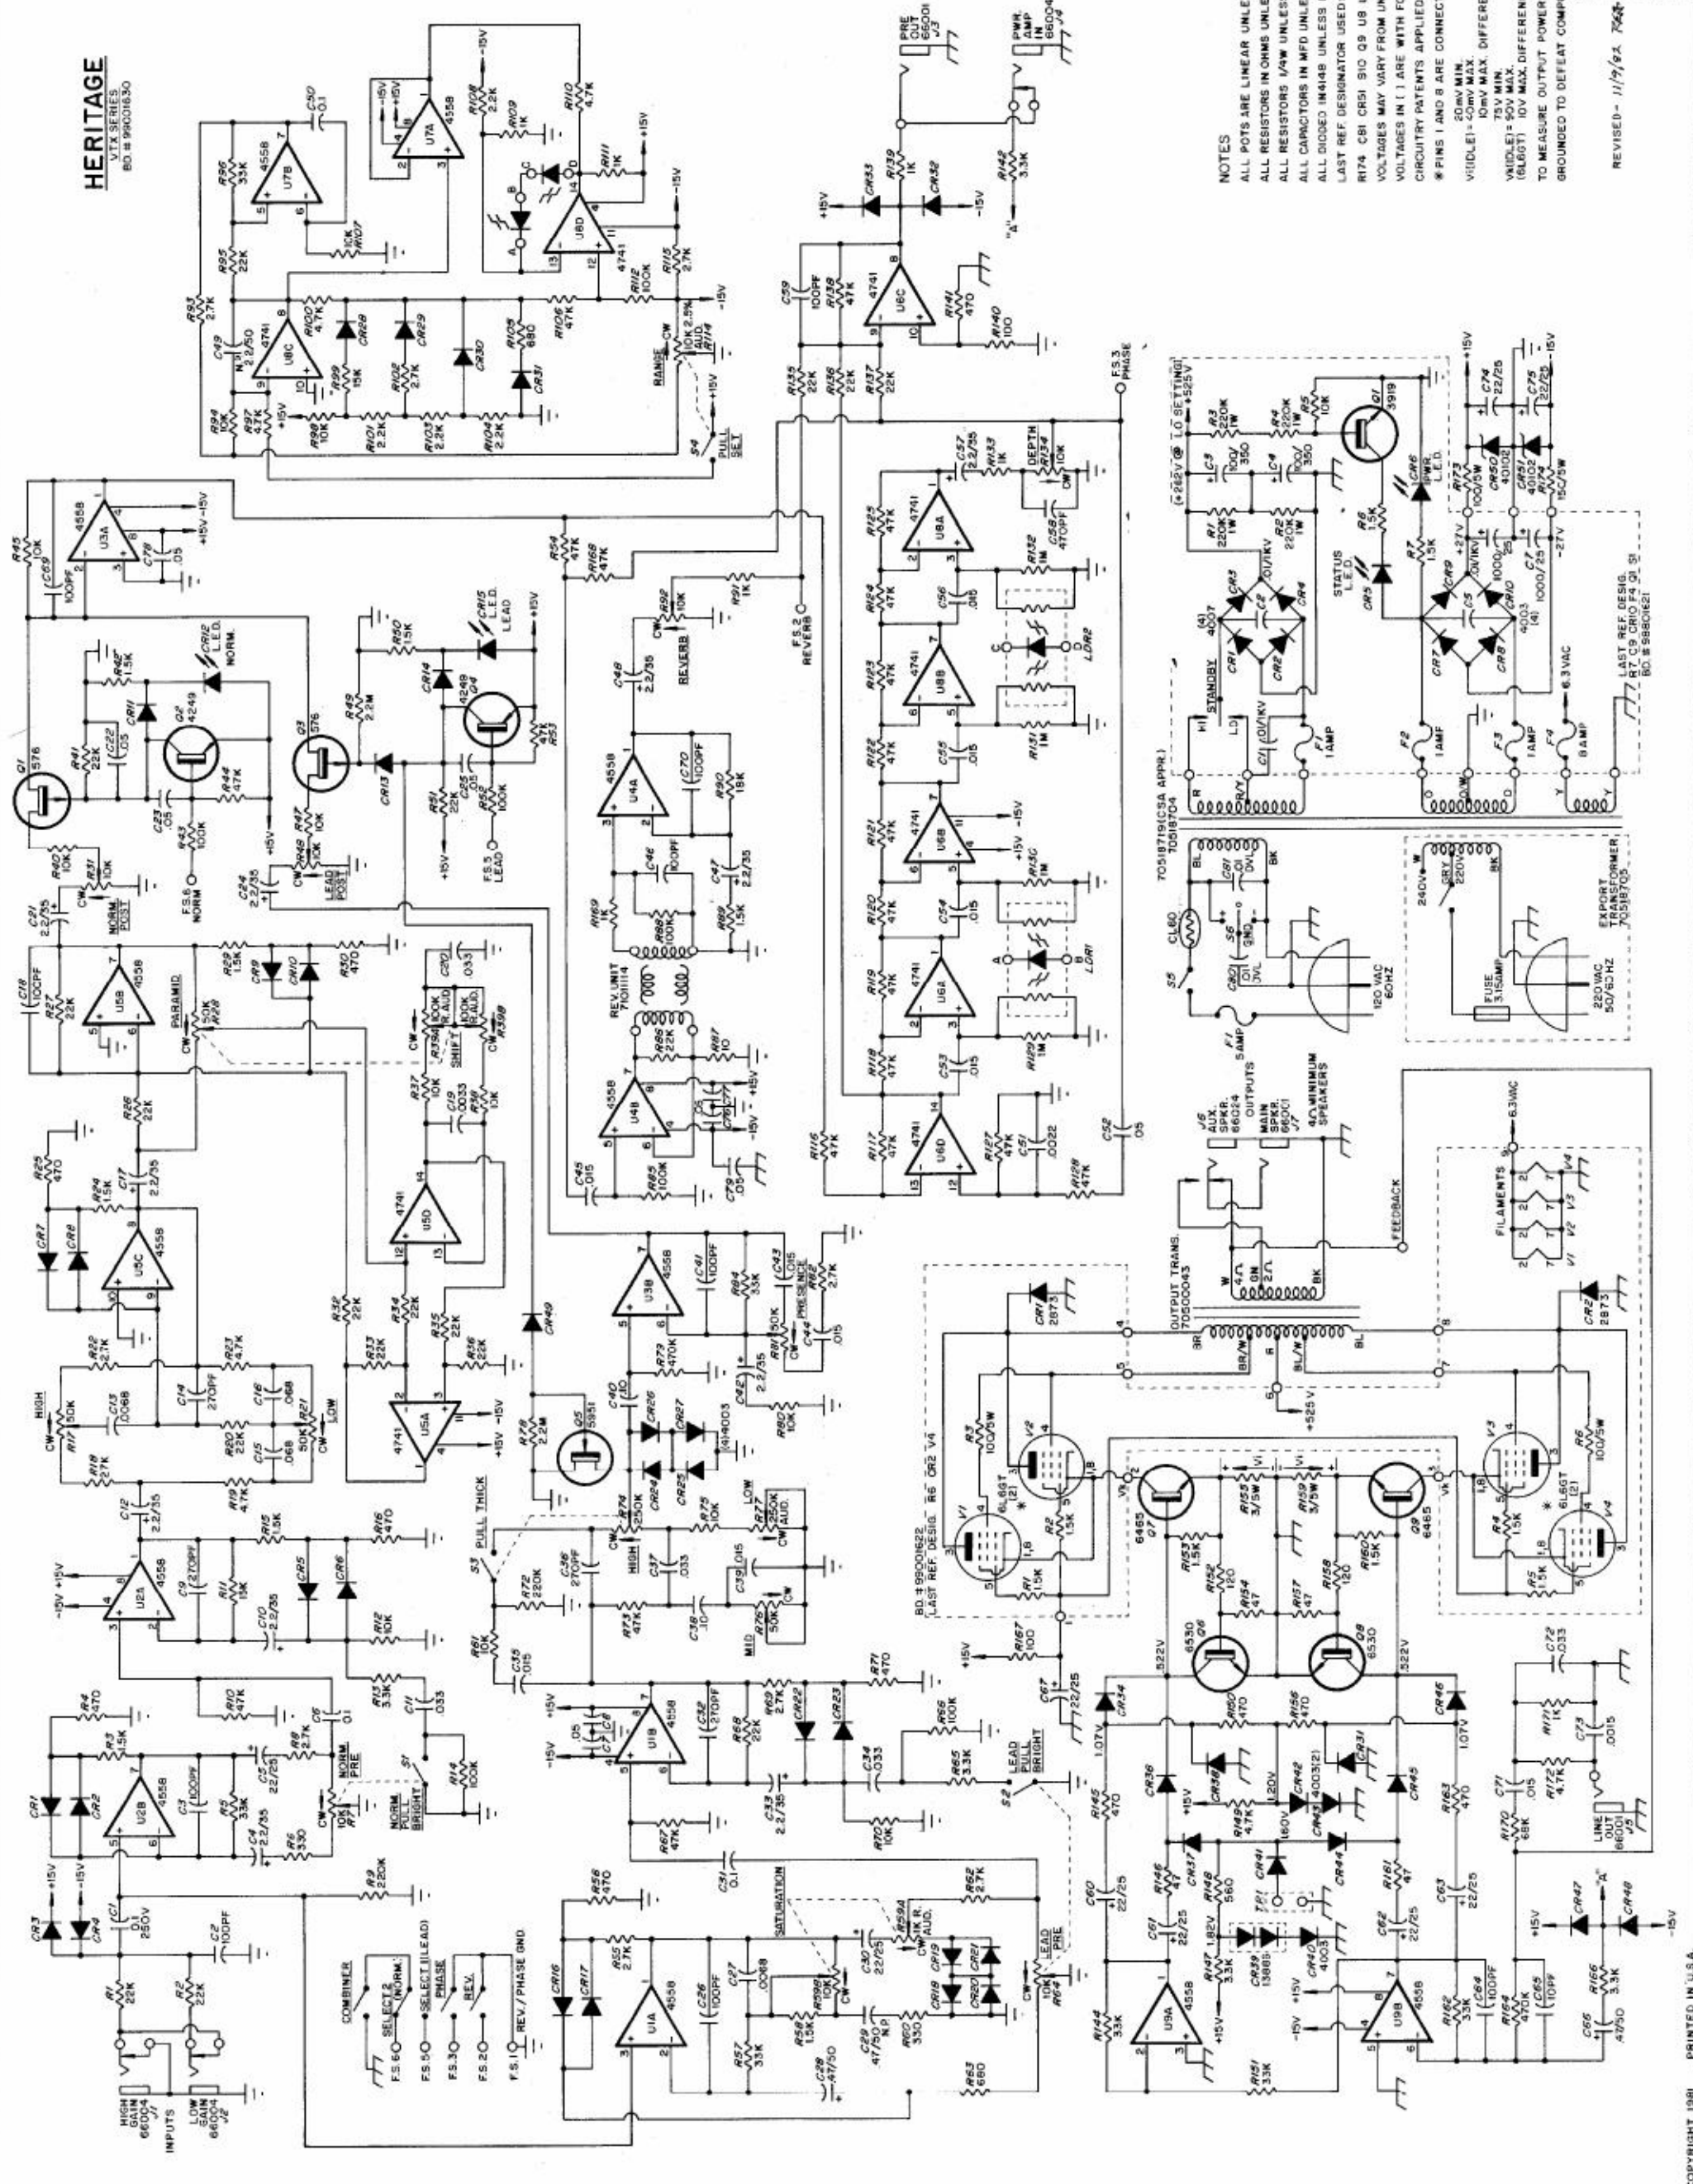

NOTES

- ALL POTS ARE LINEAR UNLESS NOTED
- ALL RESISTORS IN OHMS UNLESS NOTED
- ALL RESISTORS 1/4W UNLESS NOTED
- ALL CAPACITORS IN MFD UNLESS NOTED
- ALL DIODES IN 1N4148 UNLESS NOTED
- LAST REF DESIGNATOR USED:
- R174 CBI CR51 910 Q8 U8 LDR2 FI J7
- VOLTAGES MAY VARY FROM UNIT TO UNIT
- VOLTAGES IN () ARE WITH FOOTSWITCH CLOSED
- CIRCUITY PATENTS APPLIED FOR AND PENDING
- * PINS 1 AND 8 ARE CONNECTED ON ALL TUBES
- V1 (TUBE) = 600V MIN., 100V MAX. DIFFERENCE BETWEEN SIDES
- V2 (TUBE) = 300V MIN., 100V MAX. DIFFERENCE BETWEEN SIDES
- V3 (TUBE) = 10V MAX. DIFFERENCE BETWEEN SIDES
- V4 (TUBE) = 10V MAX. DIFFERENCE BETWEEN SIDES
- TO MEASURE OUTPUT POWER RATING AT 5% T.D.D., T.F.I. MUST BE GROUNDED TO DEFEAT COMPRESSION EFFECT OF POWER AMP.

PEAVEY ELECTRONICS CORP.
MERRIDEN, MS.
DRAWN BY RSE - DATE 8/25/81
CHECK BY
APPR. BY

REVISED - 11/19/81