


HOW TO USE THIS MANUAL

Each repair method description provided in Section RE of this manual comprises two pages, divided into 2 blocks (REMOVAL AND INSTALLATION) and includes illustrations to facilitate body repair.

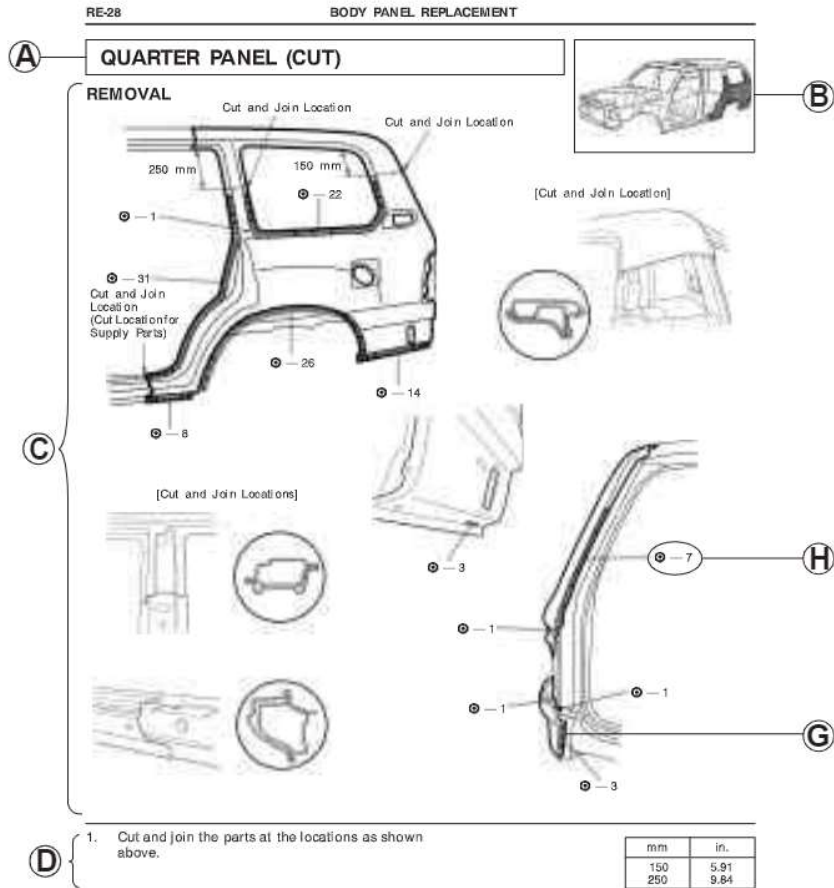

A : REPLACEMENT PARTS AND METHOD

QUARTER PANEL (CUT)

- Replacement method
 - (ASSY) Assembly replacement
 - (CUT) Major cutting (less than 1/2 of parts used)
 - (CUT-H) Half cutting (about 1/2 of parts used)
 - (CUT-P) Partial cutting (most of parts used)
- Replacement Parts

B : PARTS LOCATION

C : REMOVAL DIAGRAM

Describes in detail removal of the damaged parts involving repair by cutting.


D : REMOVAL GUIDE

Provides additional information to more efficiently help you perform the removal.

cardiagn.com

INTRODUCTION – How to Use This Manual


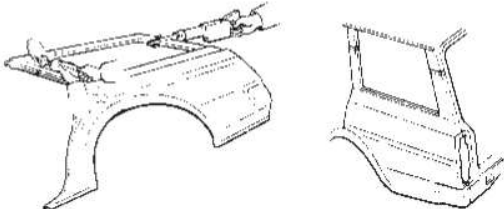

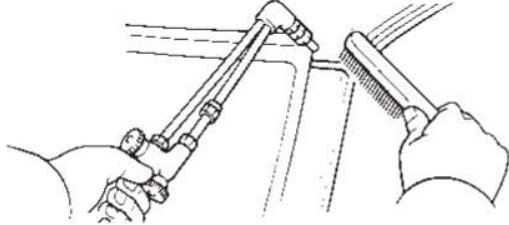


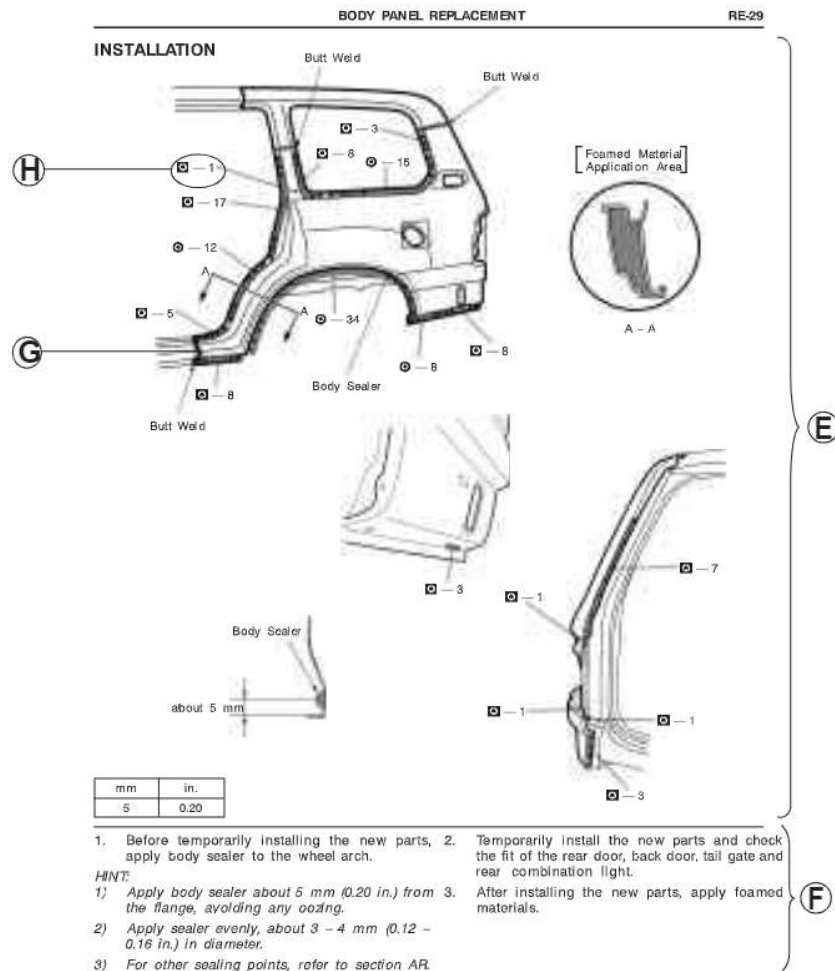









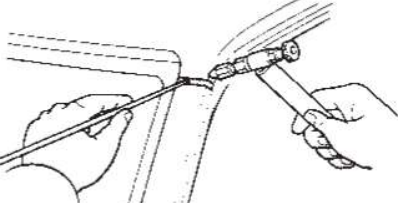


IN-3



- E** : **INSTALLATION DIAGRAM**
Describes in detail installation of the new parts involving repair by welding and/or cutting, but excluding painting.
- F** : **INSTALLATION GUIDE**
Provides additional information to more efficiently help you perform the installation.
- G** : **SYMBOLS**
[See page IN-4.](#)
- H** : **ILLUSTRATION OF WELD POINTS**
Weld method and panel position symbols.
[See page IN-5.](#)

SYMBOLS


The following symbols are used in the Welding Diagrams in Section RE of this manual to indicate cutting areas and the types of weld required.

SYMBOLS	MEANING	ILLUSTRATION
	<p>SAW CUT OR ROUGH CUT</p>	
	<p>REMOVE BRAZE</p>	
      	<p>WELD POINTS SPOT WELD OR MIG PLUG WELD <i>(See page IN-5)</i></p>	 
	<p>CONTINUOUS MIG WELD (BUTT WELD OR TACK WELD)</p>	
	<p>BRAZE</p>	
	<p>BODY SEALER</p>	

cardiagn.com

Illustration of Weld Point Symbols

EXAMPLE:

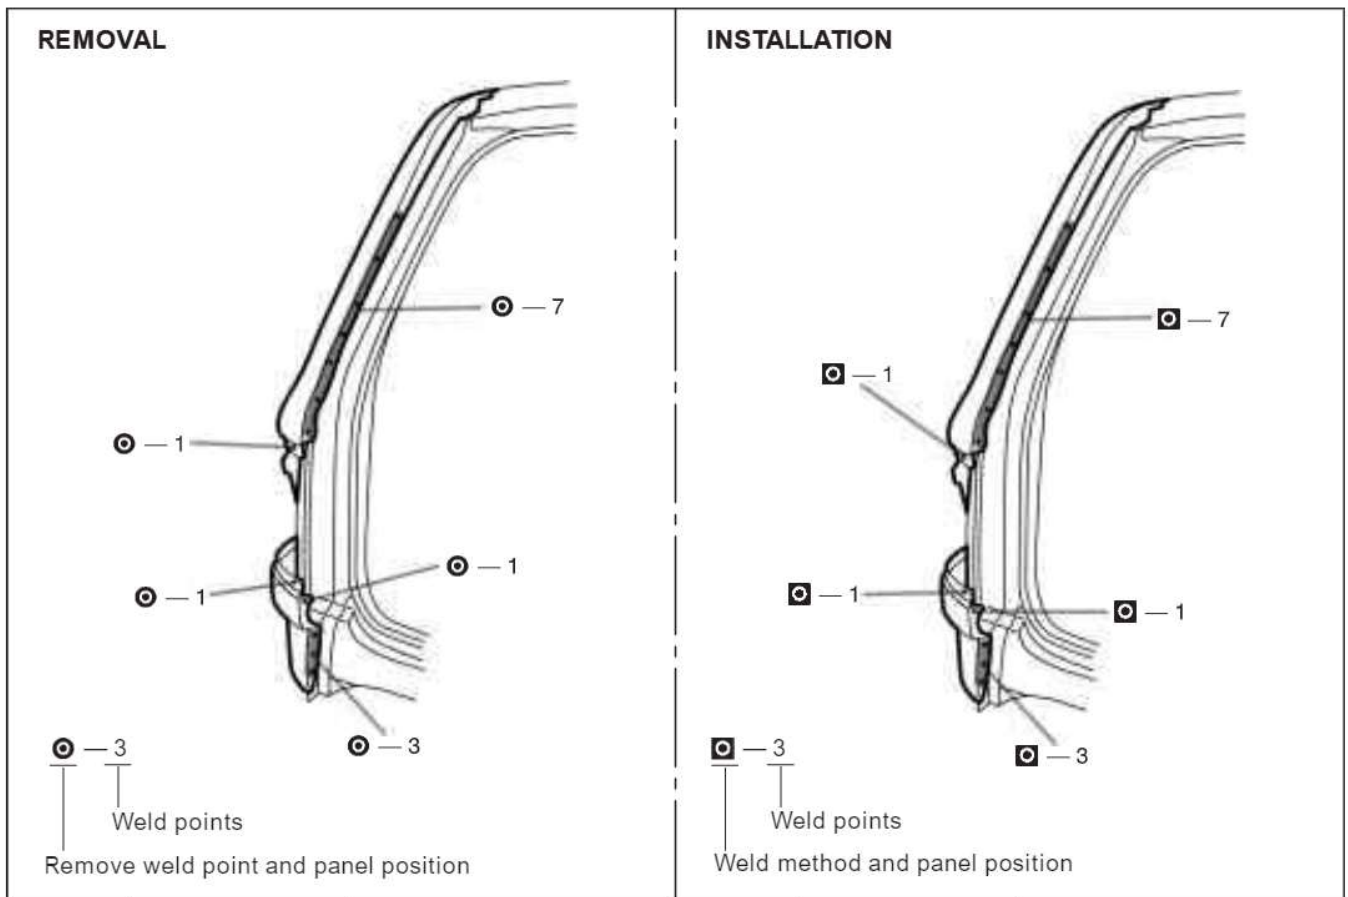

SYMBOL	MEANING	ILLUSTRATION	SYMBOL	MEANING	ILLUSTRATION
○ M I	Remove Weld Points		○ M I	Spot Weld	
○	(Outside)		○ M I	Mig Plug Weld	
M	(Middle)		+	Spot MIG Weld	
I	(Inside)				

HINT: Panel position symbols are as seen from the working posture.

cardiagn.com

HANDLING PRECAUTIONS ON RELATED COMPONENTS

1. FOR VEHICLES EQUIPPED WITH SRS AIRBAG AND SEAT BELT PRETENSIONER

The TOYOTA LAND CRUISER is equipped with an SRS (Supplemental Restraint System), such as the driver airbag and front passenger airbag and seat belt pretensioners.

Failure to carry out service operations in the correct sequence could cause the supplemental restraint system to unexpectedly deploy during servicing, possibly leading to a serious accident.

Further, if a mistake is made in servicing the supplemental restraint system, it is possible the SRS may fail to operate when required. Before servicing (including removal or installation of parts, inspection or replacement), be sure to read the following items carefully, then follow the correct procedure described in this manual.

- Malfunction symptoms of the supplemental restraint system are difficult to confirm, so the diagnostic trouble codes become the most important source of information when troubleshooting. When troubleshooting the supplemental restraint system, always inspect the diagnostic trouble codes before disconnecting the battery.
- Work must be started after 90 seconds from the time the ignition switch is turned to the "LOCK" position and the negative (-) terminal cable is disconnected from the battery. (The supplemental restraint system is equipped with a back-up power source so that if work is started within 90 seconds of disconnecting the negative (-) terminal cable from the battery, the SRS may deploy.)
When the negative (-) terminal cable is disconnected from the battery, memory of the clock and audio systems will be cancelled. So before starting work, make a record of the contents memorized by the audio memory system.
Then when work is finished, reset the clock and audio systems as before.
To avoid erasing the memory of each memory system, never use a back-up power supply from outside the vehicle.
- Even in cases of a minor collision where the SRS does not deploy, the passenger's airbag assembly, the steering wheel pad and seat belt pretensioners should be inspected.
- Never use SRS parts from another vehicle. When replacing parts, replace them with new parts.
- Before repairs, remove the airbag sensor if shocks are likely to be applied to the sensor during repairs.
- Never disassemble and repair the airbag sensor assembly, steering wheel pad in order to reuse it.
- If the airbag sensor assembly, steering wheel pad have been dropped, or if there are cracks, dents or other defects in the case, bracket or connector, replace them with new ones.
- Do not expose the airbag sensor assembly, steering wheel pad directly to hot air or flames.
- Use a volt/ohmmeter with high impedance (10 k Ω /V minimum) for troubleshooting of the electrical circuit.
- Information labels are attached to the periphery of the SRS components. Follow the instructions on the notices.
- After work on the supplemental restraint system is completed, check the SRS warning light.
- Before repairing the body, remove the SRS parts if, during repair, shocks are likely to be applied to the sensors due to vibrations of the body or direct tapping with tools or other parts.
- Do not expose the SRS parts directly to hot air or flames.

NOTICE:

- 1) *The maximum ambient temperature tolerance is 120°C (248°F) for the front airbag sensor, 105°C (221°F) for the center airbag sensor assembly and 93°C (200°F) for the steering wheel pad, and front passenger airbag assembly. If it is possible that the ambient temperature may reach or exceed the temperature limit, remove the sensors and the steering wheel pad from the vehicle or protect them with a hot insulation material before starting work.*
 - 2) *Prior to welding, remove adjacent SRS parts from the vehicle or protect them with fire-proof covers.*
- If the vehicle is damaged, visually inspect for damage to the steering wheel pad using the inspection procedures described in section RS of the repair manual for the relevant model year.

STEERING WHEEL PAD (with Airbag)

- When removing the steering wheel pad or handling a new steering wheel pad, it should be placed with the pad top surface facing up.
In this case, the twin-lock type connector lock lever should be in the locked state and care should be taken to place it so the connector will not be damaged. In addition do not store a steering wheel pad on top of another one. Storing the pad with its metallic surface up may lead to a serious accident if the airbag inflates for some reason.
- Never measure the resistance of the airbag squib. (This may cause the airbag to deploy, which is very dangerous.)
- Grease should not be applied to the steering wheel pad and the pad should not be cleaned with detergents of any kind.
- Store the steering wheel pad where the ambient temperature remains below 93°C (200°F), without high humidity and away from electrical noise.
- When using electric welding, first disconnect the airbag connector (yellow color and 2 pins) under the steering column near the combination switch connector before starting work.
- When disposing of a vehicle or the steering wheel pad alone, the airbag should be deployed using an SST before disposal.
Carry out the operation in a safe place away from electrical noise.

FRONT PASSENGER AIRBAG ASSEMBLY

- Always store a removed or new front passenger airbag assembly with the airbag deployment direction facing up. Storing the airbag assembly with the airbag deployment direction facing down could cause a serious accident if the airbag inflates.
- Never measure the resistance of the airbag squib.
(This may cause the airbag deploy, which is very dangerous.)
- Grease should not be applied to the front passenger airbag assembly and the airbag door should not be cleaned with detergents of any kind.
- Store the airbag assembly where the ambient temperature remains below 93°C (200°F), without high humidity and away from electrical noise.
- When using electric welding, first disconnect the airbag connector (yellow color and 2 pins) installed on the glove compartment finish plate at the left side of the glove compartment before starting work.
- When disposing of a vehicle or the airbag assembly alone, the airbag should be deployed using an SST before disposal.
Perform the operation in a safe place away from electrical noise.

SEAT BELT PRETENSIONER

- Before doing any operation which will apply a strong shock to the vehicle, or before removing the seat belt pretensioner, be sure to apply the sensor shock.
- Never disassemble the seat belt pretensioner.
- Do not subject the seat belt pretensioner to shocks or bring magnets close to it.
- Do not expose the seat belt pretensioner to high temperature or fire.
- Do not drop the seat belt pretensioner. Never use a seat belt pretensioner which has been dropped.
- Never install the seat belt pretensioner in another vehicle.
- Store removed seat belt pretensioners on a flat, stable surface.
- After frontal collision, always check whether the seat belt pretensioners have been activated.
- When disposing of a vehicle or the pretensioner by itself, always activate the pretensioner before disposal.
- The seat belt pretensioner is hot when activated, so let it cool down fully before you dispose of it. Never apply water to the seat belt pretensioner.

IN-8 INTRODUCTION – Handling Precautions on Related Components

AIRBAG SENSOR ASSEMBLY

- Never reuse the airbag sensor assembly involved in a collision when the SRS has deployed.
- The connectors to the airbag sensor assembly should be connected or disconnected with the sensor mounted on the floor. If the connectors are connected or disconnected while the airbag sensor assembly is not mounted to the floor, it could cause undesired ignition of the supplemental restraint system.
- Work must be started after 90 seconds from the time the ignition switch is turned to the "LOCK" position and the negative (-) terminal cable is disconnected from the battery, even if only loosening the set bolts of the airbag sensor assembly.

WIRE HARNESS AND CONNECTOR

- The SRS wire harness is integrated with the cowl wire harness assembly and floor wire harness assembly. The wires for the SRS wire harness are encased in a yellow corrugated tube. All the connectors for the system are also a standard yellow color. If the SRS wire harness becomes disconnected or the connector becomes broken due to an accident, etc., repair or replace it as shown on page.

2. BRAKE SYSTEM

The brake system is one of the most important safety components. Always follow the directions and notes given in section BR of the repair manual for the relevant model year when handling brake system parts.

NOTICE: When repairing the brake master cylinder or TRAC system, bleed the air out of the TRAC system.

3. DRIVE TRAIN AND CHASSIS

The drive train and chassis are components that can have great effects on the running performance and vibration resistance of the vehicle. After installing components in the sections listed in the table below, perform alignments to ensure correct mounting angles and dimensions. Particularly accurate repair of the body must also be done to ensure correct alignment.

HINT: Correct procedures and special tools are required for alignment. Always follow the directions given in the repair manual for the relevant model during alignment and section DI of this manual.

Component to be aligned	Section of repair manual for relevant model
Front Wheels	Suspension and Axle (SA) section
Rear Wheels	Suspension and Axle (SA) section
Propeller Shaft	Propeller Shaft (PR) section

4. COMPONENTS ADJACENT TO THE BODY PANELS

Various types of component parts are mounted directly on or adjacently to the body panels. Strictly observe the following precautions to prevent damaging these components and the body panels during handling.

- Before repairing the body panels, remove their components or apply protective covers over the components.
- Before prying components off using a screwdriver or a scraper, etc., attach protective tape to the tool tip or blade to prevent damaging the components and the body paint.
- Before removing components from the outer surface of the body, attach protective tape to the body to ensure no damage to painted areas.

HINT: Apply touch-up paint to any damaged paint surfaces.

- Before drilling or cutting sections, make sure that there are no wires, etc. on the reverse side.

5. ECU (ELECTRONIC CONTROL UNIT)

Many ECUs are mounted in this vehicle.

Take the following precautions during body repair to prevent damage to the ECUs.

- Before starting electric welding operations, disconnect the negative (–) terminal cable from the battery.
When the negative (–) terminal cable is disconnected from the battery, memory of the clock and audio systems will be cancelled. So before starting work, make a record of the contents memorized by each memory system. Then when work is finished, reset the clock and audio systems as before.
When the vehicle has tilt and telescopic steering, power seat and outside rear view mirror, which are all equipped with memory function, it is not possible to make a record of the memory contents. So when the operation is finished, it will be necessary to explain this fact to the customer, and request the customer to adjust the features and reset the memory.
- Do not expose the ECUs to ambient temperatures above 80°C (176°F).
NOTICE: If it is possible the ambient temperature may reach 80° (176°F) or more, remove the ECUs from the vehicle before starting work.
- Be careful not to drop the ECUs and not to apply physical shocks to them.

ABBREVIATIONS USED IN THIS MANUAL

For convenience, the following abbreviations are used in this manual.

ABS	Antilock Brake System
A/C	Air Conditioner
assy	assembly
ECT	Electronic Controlled Transmission
ECU	Electronic Control Unit
e.g.	Exempli Gratia (for Example)
Ex.	Except
4WD	Four Wheel Drive Vehicles
in.	inch
LH	Left-hand
LHD	Left-hand Drive
MIG	Metal Inert Gas
M/Y	Model Year
PPS	Progressive Power Steering
RH	Right-hand
RHD	Right-hand Drive
SRS	Supplemental Restraint System
SSM	Special Service Materials
w/	with
w/o	without

GENERAL REPAIR INSTRUCTIONS

Work Precautions

SAFETY


Never stand in direct line with the chain when using a puller on the body or frame, and be sure to attach a safety cable.

VEHICLE PROTECTION

When welding, protect the painted surfaces, windows, seats and carpet with heat-resistant, fire-proof covers.

SAFETY

1. Before performing repair work, check for fuel leaks. If a leak is found, be sure to close the opening totally.
2. If it is necessary to use a frame in the area of the fuel tank, first remove the tank and plug the fuel line.

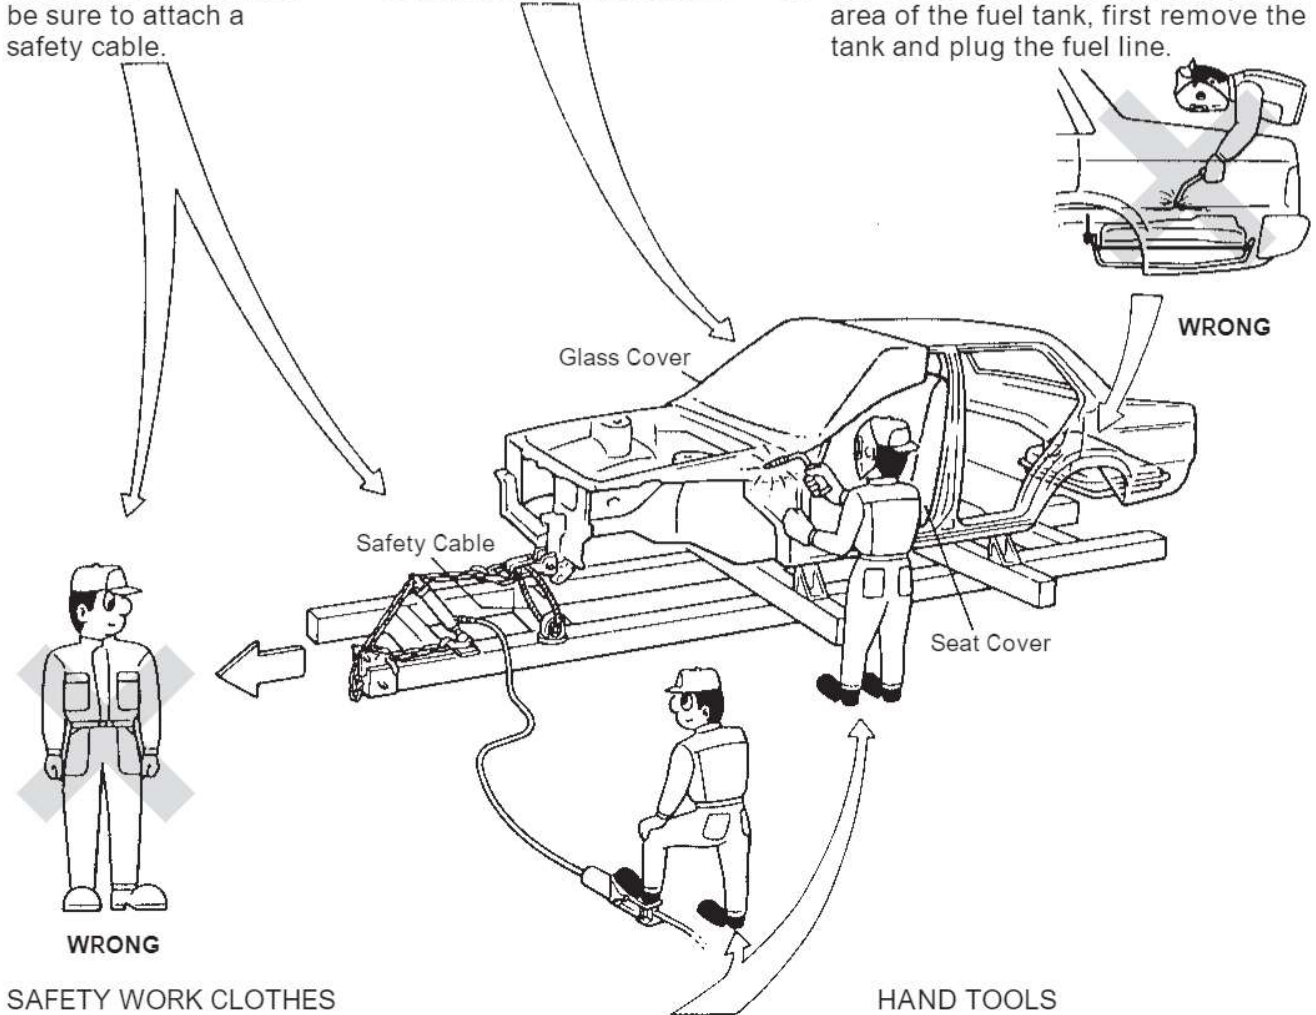


SAFETY WORK CLOTHES

In addition to the usual mechanic's wear, cap and safety shoes, the appropriate gloves, head protector, glasses, ear plugs, face protector, dust-prevention mask, etc. should be worn as the situation demands.

HAND TOOLS

Keeping your hand tools in neat order improve your work efficiency.

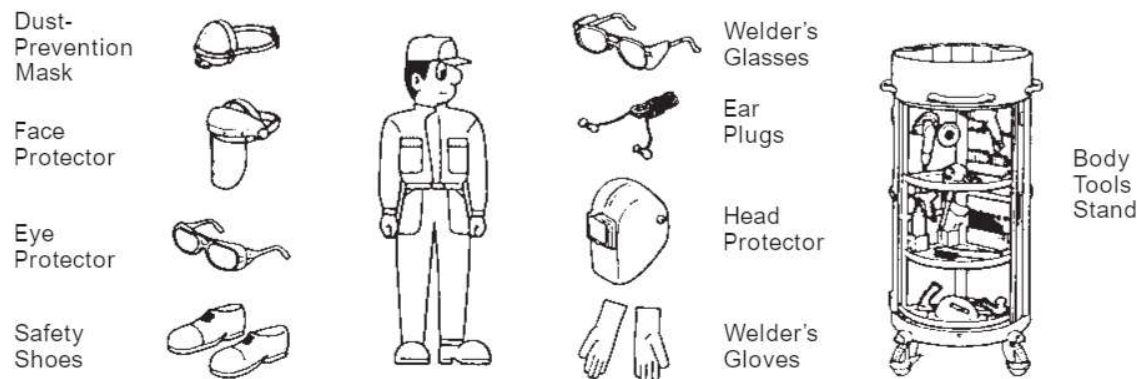


Proper and Efficient Work Procedures

REMOVAL

PRE-REMOVAL MEASURING

Before removal or cutting operations, take measurements in accordance with the dimension diagram. Always use a puller to straighten a damaged body or frame.

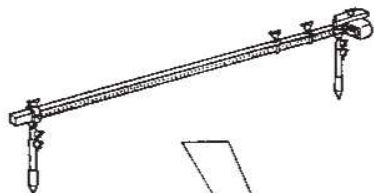

NUMBER OF SPOT WELDS AND PANEL POSITIONS


The number of spot welds and the panel positions to be removed are shown for your reference.

HINT: See "Symbols" on page IN-4,5.

REMOVAL OF ADJACENT COMPONENTS

When removing adjacent components, apply protective tape to the surrounding body and your tools to prevent damage.

HINT: See "Handling Precautions on Related Components" on page IN-6.

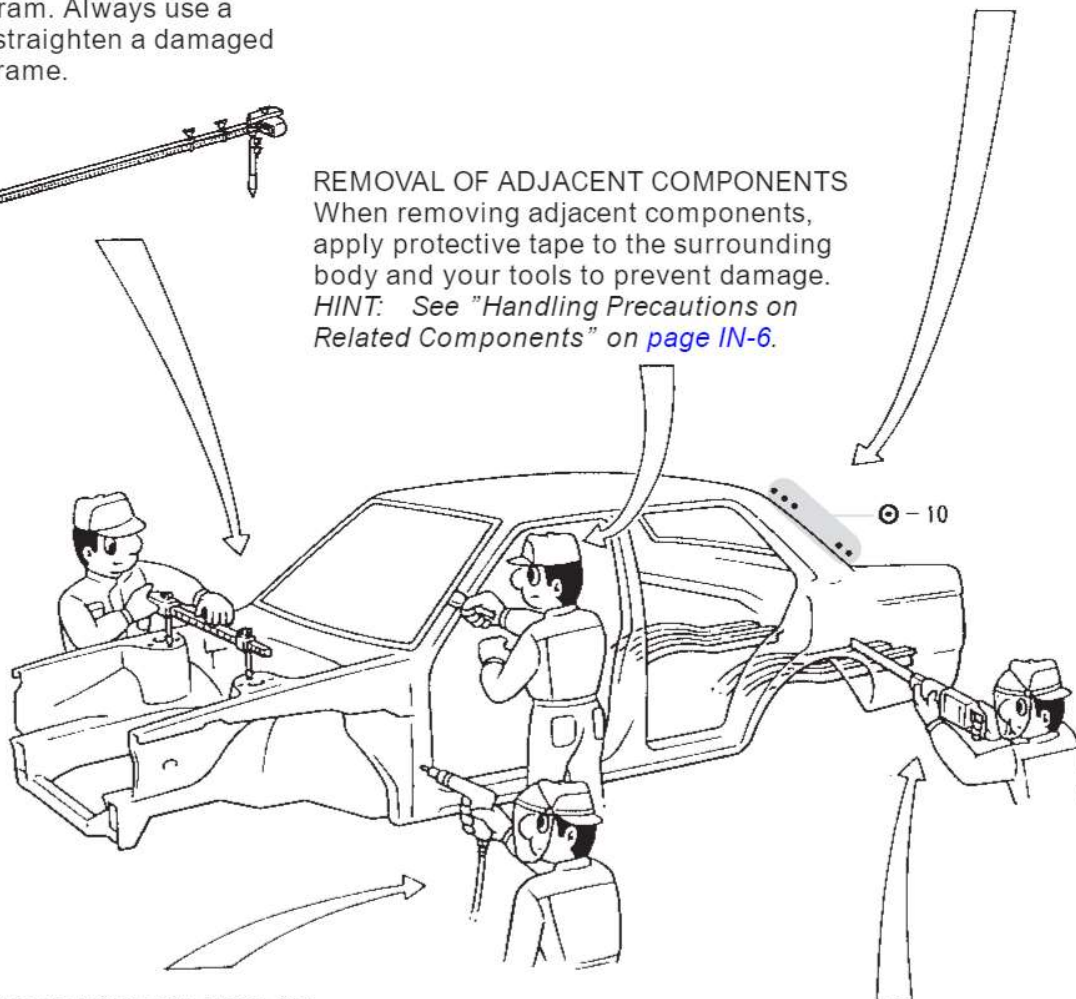


PRECAUTIONS FOR DRILLING OR CUTTING

Check behind any area to be drilled or cut to insure that there are no hoses, wires, etc., that may be damaged.


HINT: See "Handling Precautions on Related Components" on page IN-6.

CUTTING AREA

Always cut in a straight line and avoid reinforced area.

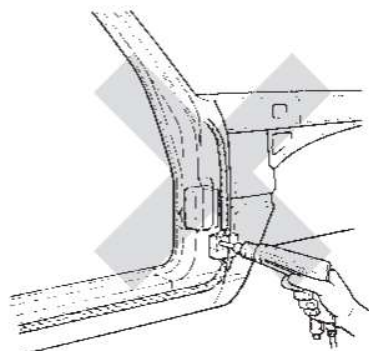


WRONG

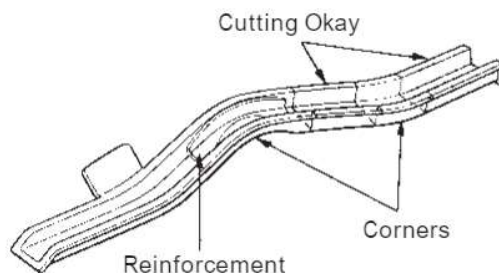

cardiagn.com


PREPARATION FOR INSTALLATION

SPOT WELD POINTS

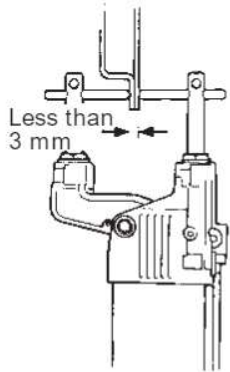

When welding panels with a combined thickness of over 3 mm (0.12in.), use a MIG (Metal Inert Gas) welder for plug welding. *HINT: Spot welding will not provide sufficient durability for panels over 3 mm (0.12in.) thick.*


APPLICATION OF WELD-THROUGH PRIMER (SPOT SEALER)

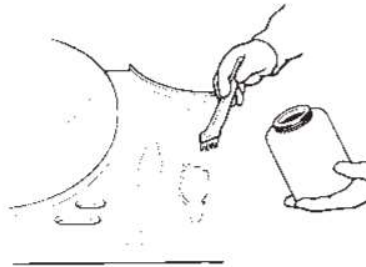

Remove the paint from the portion of the new parts and body to be welded, and apply weld-through primer. *HINT: See "ANTI-RUST TREATMENT" on page AR-2.*

Parts Name	Parts Number
Spot Sealer	08839-00070

※ The above SSM or equivalent

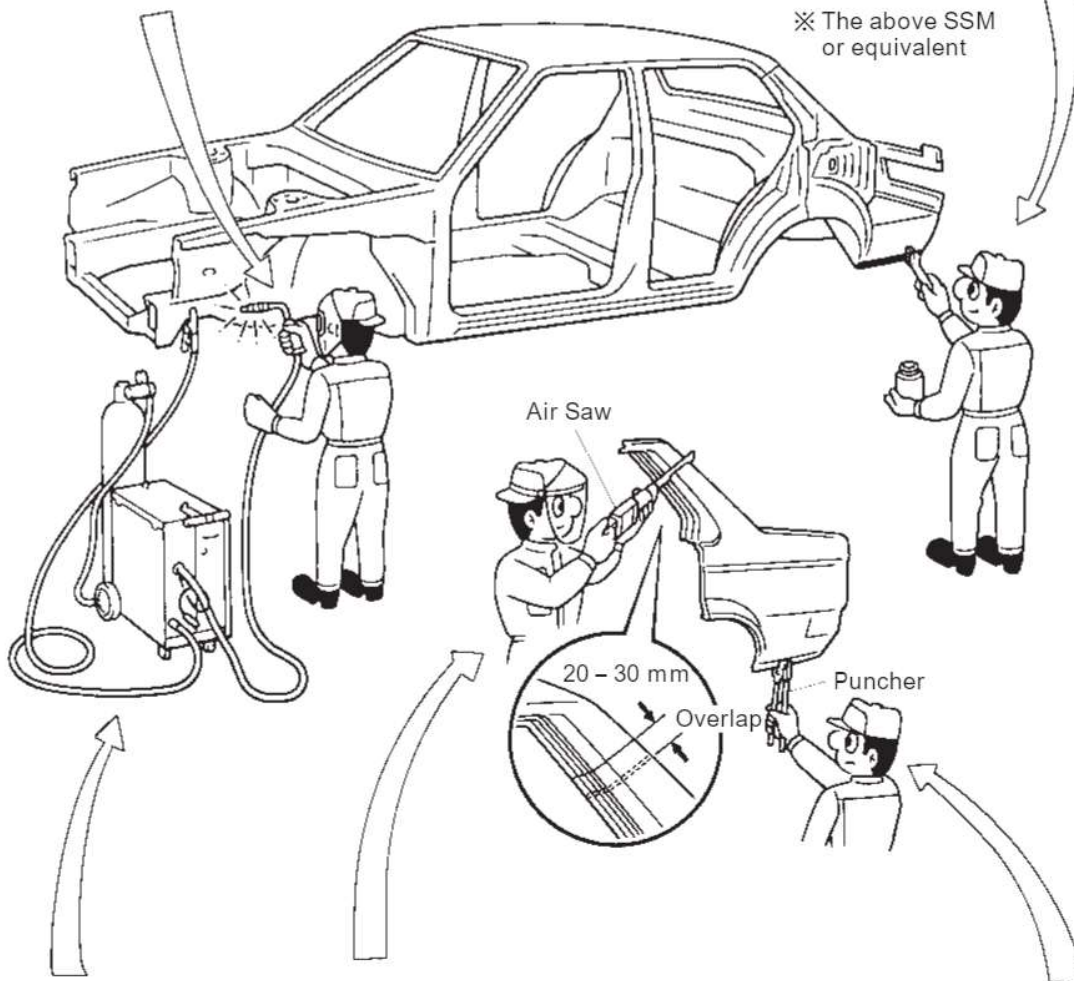

SAFETY PRECAUTIONS FOR ELECTRICAL COMPONENTS. When welding there is a danger that electrical components will be damaged by the electrical current flowing through the body. Before starting work disconnect the negative terminal of the battery and ground the welder near the welding location of the body.

ROUGH CUTTING OF JOINTS
For joint areas, rough cut the new parts, leaving 20 – 30 mm (0.79 – 1.18in.) overlap.

MAKING HOLES FOR PLUG WELDING
For areas where a spot welder cannot be used, use a puncher or drill to make holes for plug welding.


REFERENCE: mm (in.)

Thickness of welded portion	Size of plug hole
1.0 (0.04) under	5 (0.20) ϕ over
1.0 (0.04) – 1.5 (0.06)	6.5 (0.26) ϕ over
1.5 (0.06) over	8 (0.31) ϕ over

INSTALLATION

PRE-WELDING MEASUREMENTS

Always take measurements before installing underbody or engine components to insure correct assembly. After installation, confirm proper fit.

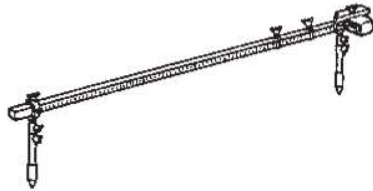


WELDING PRECAUTIONS


- The number of welding spots should be as follows.
Spot weld: 1.3 x No. of manufacturer's spots.
Plug weld: More than No. of manufacturer's plugs.

POST-WELDING REFINISHING

- Always check the welded spots to insure they are secure.
- When smoothing out the weld spots with a disc grinder, be careful not to grind off too much as this would weaken the weld.




WRONG

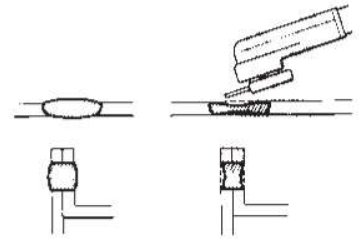

OKAY


WRONG

- Plug welding should be done with a MIG (Metal Inert Gas) welder. Do not gas weld or braze panels at areas other than specified.

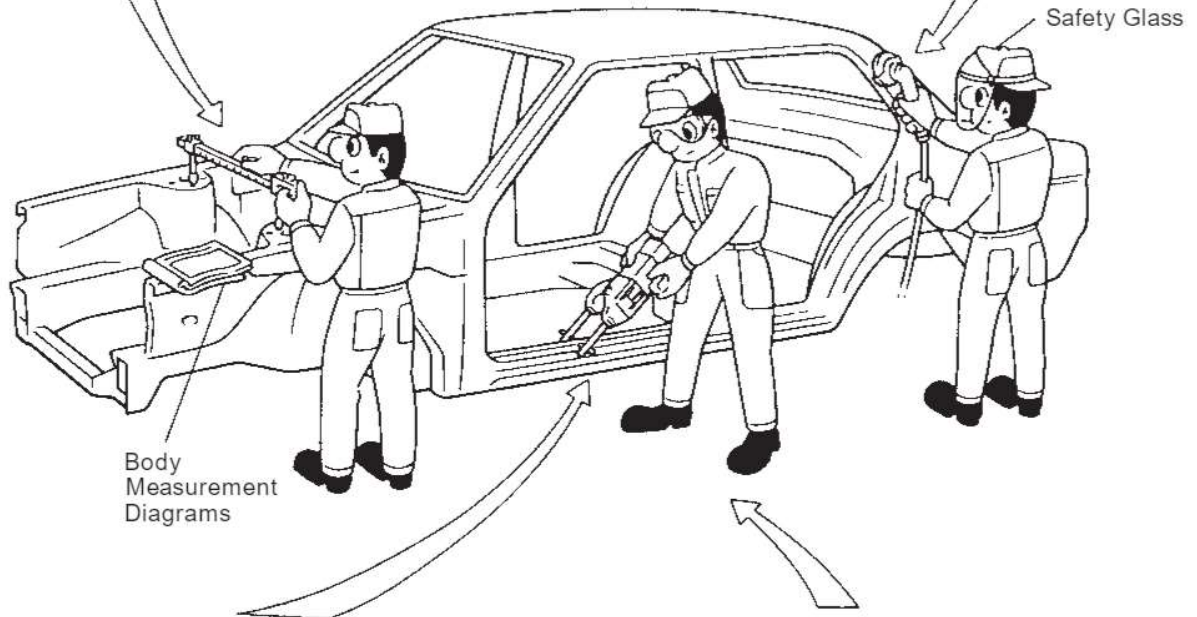


SPOT WELD LOCATIONS

Try to avoid welding over previous spots.

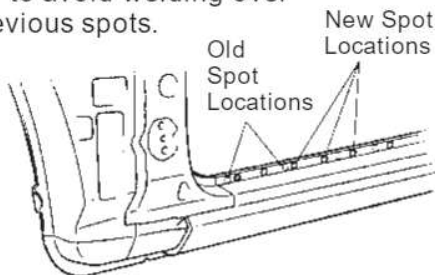

SPOT WELDING PRECAUTIONS

- The shape of the welding tip point has an effect on the strength of the weld.
- Always insure that the seams and welding tip are free of paint.



Tip Cutter

IN-14

INTRODUCTION – General Repair Instructions

ANTI-RUST TREATMENT

When replacing body panels, always apply body sealer, anti-rust agent or undercoat according to the requirements of your country.

HINT: For further details, see the description given in Section AR of this manual.

BODY SEALER

Apply body sealer to the required areas.



Cartridge Type Tube Type


Parts Name	Parts Number
Body Sealer, White (Cartridge Type)	08839-00020
Body Sealer, White (Tube Type)	08839-00030
Body Sealer, Black (Cartridge Type)	08839-00040

※ The above SSM or equivalent

ANTI-RUST AGENT (WAX)


Apply anti-rust agent to following sections.

- Inside of the hems of the doors and hood.
- Around the hinges of the doors and hood.
- Inside of the welded parts with boxed cross-section.



Parts Name	Parts Number
Rustop W (Aerosol)	08860-00200
Rustop W (1ℓ Milky White)	08860-00210
Rustop W (18ℓ Milky White)	08860-00230
Rustop B (1ℓ Black)	08860-00220
Rustop B (18ℓ Black)	08860-00240

※ The above SSM or equivalent

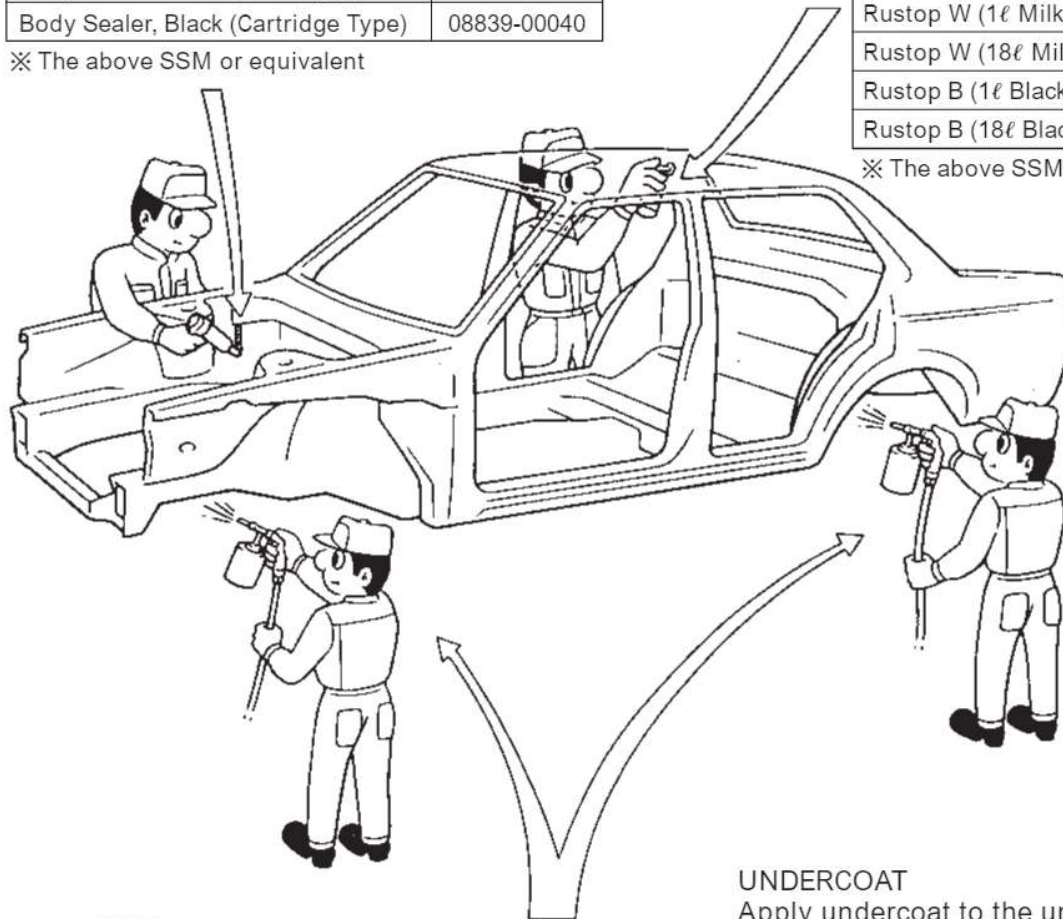

Undercoating (Oil base)

Undercoating (Water base)



Spray Gun


UNDERCOAT

Apply undercoat to the underbody and wheel housings.

Parts Name	Parts Number
Pastar UC (Oil Base)	08836-00155
Pastar UW (Water Base)	08836-00115
Pastar Gun (For thick application)	08836-00091

※ The above SSM or equivalent

cardiagn.com

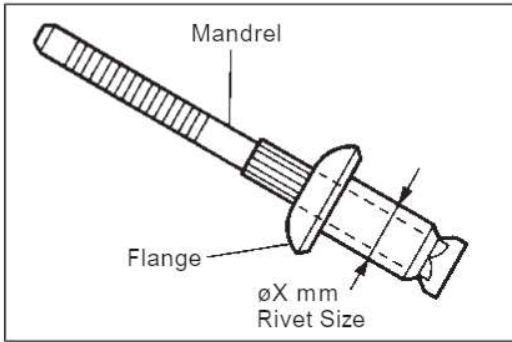

RIVET REMOVAL AND INSTALLATION

PARTS NAME AND VARIETY OF RIVET

	Aluminum-Rivet	Steel-Rivet	Waterproof-Rivet	T-Rivet
External Appearance	Before installation 	Before installation 	Before installation 	Before installation
	After installation 	After installation 	After installation Waterproof Seal 	After installation Mandrel
Characteristics	<ul style="list-style-type: none"> • Small nonwaterproof rivet • No magnetic adherence 	<ul style="list-style-type: none"> • Small nonwaterproof rivet • Magnetic adherence 	<ul style="list-style-type: none"> • Small waterproof rivet • Waterproof seal 	<ul style="list-style-type: none"> • Large waterproof rivet • Mandrel sticks out after installation





RIVET REMOVAL

1. SELECTION OF CUTTING TOOL

	Cutting tool	Note								
Aluminum-Rivet Steel-Rivet T-Rivet with ø6.4 mm	Drill blade <table border="1"> <thead> <tr> <th>Rivet size</th> <th>Blade size</th> </tr> </thead> <tbody> <tr> <td>ø4 mm</td> <td>ø4 mm</td> </tr> <tr> <td>ø4.8 mm</td> <td>ø5 mm</td> </tr> <tr> <td>ø6.4 mm</td> <td>ø6.5 mm</td> </tr> </tbody> </table>	Rivet size	Blade size	ø4 mm	ø4 mm	ø4.8 mm	ø5 mm	ø6.4 mm	ø6.5 mm	<ul style="list-style-type: none"> • Cutting can be done with drill blade or rivet cutter for an aluminum-rivet with ø4.8 mm. • When a rivet cutter is used for an aluminum-rivet (except ø4.8 mm), a steel-rivet, or a T-rivet with ø6.4 mm, it is possible that the drill will spin abnormally damaging the rivet hole and breaking the rivet cutter.
Rivet size	Blade size									
ø4 mm	ø4 mm									
ø4.8 mm	ø5 mm									
ø6.4 mm	ø6.5 mm									
Waterproof special-Rivet with ø4.0 mm	Drill blade with ø4.0 mm									
Aluminum-Rivet with ø4.8 mm Waterproof-Rivet with ø4.8 mm or ø6.0 mm	Rivet Cutter (P/N 09060-60350) 	<ul style="list-style-type: none"> • When an ordinary cutter is used for a waterproof-rivet with ø4.8 mm or ø6.0 mm, the rivet can not be cut as it spins with the cutter. 								

IN-16

INTRODUCTION – Rivet Removal and Installation

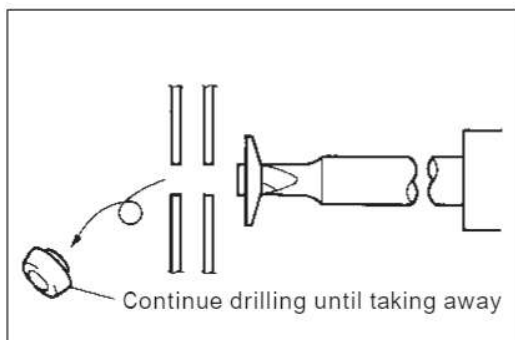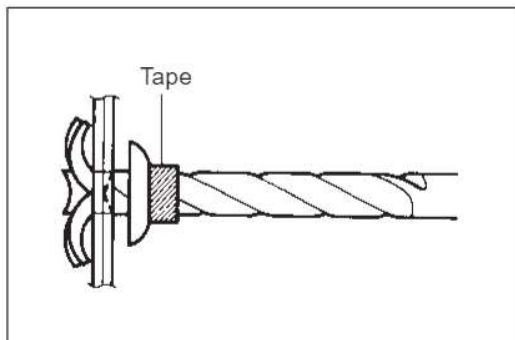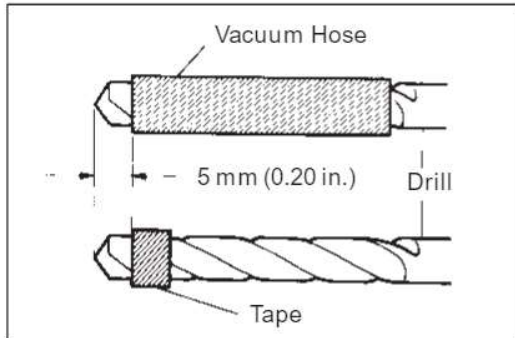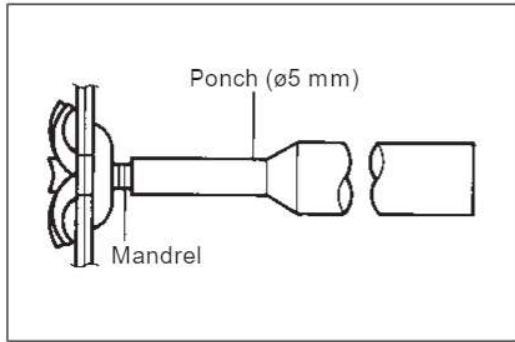

2. RIVET REMOVAL

- (1) T-Rivet with $\varnothing 6.4$ mm:
Using a punch with $\varnothing 5$ mm, stamp out the mandrel.

- (2) Put tape around the drill blade 5 mm (0.20 in.) from the tip or insert a vacuum hose.

NOTE: Use of tape or a vacuum hose prevents damage to the rivet hole.

- (3) Attach the drill blade or a rivet cutter to the drill.

- (4) Gently and vertically put the drill to the rivet, and cut the rivets flange.

NOTE:

- While upward drilling, wear a protective glasses.
- If a drill is strongly pushed deeply in to a rivet, the rivet can't be cut as it spins together with the drill.
- Prizing the hole with a drill can lead to damage to the rivet hole or the breaking of the rivet cutter.
- Take care as the cut rivet is hot.


- (5) Aluminum-Rivet and Waterproof-Rivet with $\varnothing 4.8$ mm or $\varnothing 6.0$ mm:
Even if flange is taken off, continue drilling and push out remaining fragments with the drill.

- (6) Steel-Rivet:
If the flange is taken off, stop drilling and pull out the remaining fragments with a pliers.

- (7) T-Rivet with $\varnothing 6.4$ mm:
If the flange is taken off, stop drilling and push out the remaining fragments with a punch with $\varnothing 5$ mm or pull out the remaining fragments with pliers.

INTRODUCTION – Rivet Removal and Installation

IN-17

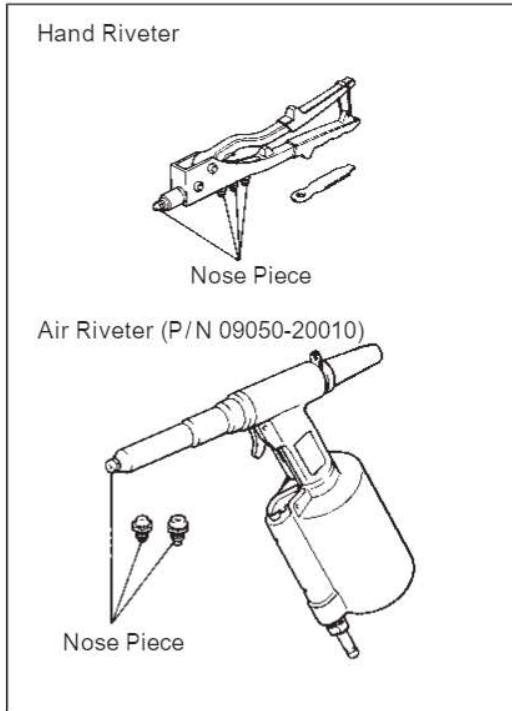


RIVET INSTALLATION

1. RIVET INSTALLATION

- (1) Apply touch-up paint at the area.
- (2) Select an installation tool.

Item	Installation tool
Aluminum-Rivet Waterproof-Rivet with $\phi 4.8$ mm	Hand Riveter or Air Riveter
Steel-Rivet Waterproof-Rivet with $\phi 6.0$ mm T-Rivet with $\phi 6.4$ mm	Air Riveter

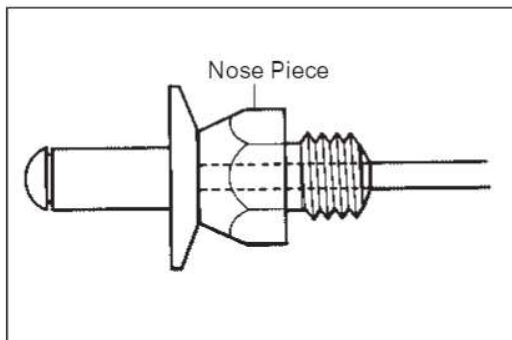


- (3) Select the smallest a nose piece possible for a rivets mandrel.

NOTE: Wrong selection of a nose piece may cause the riveter to be damaged or bad tightening.

<Reference> Nose piece of Air Riveter

Parts Name	Parts Number	Color	Rivet type
Nose piece No. 1	09050-02020	Silver	$\phi 4.0$ mm Aluminum $\phi 4.0$ mm Steel $\phi 4.8$ mm Waterproof
Nose piece No. 2	09050-02030	Copper	$\phi 4.8$ mm Aluminum $\phi 4.8$ mm Steel
Nose piece No. 3	09050-02040	Black	$\phi 6.4$ mm T-Rivet
Nose piece No. 4	09050-02050	Black	$\phi 4.0$ mm Waterproof Special

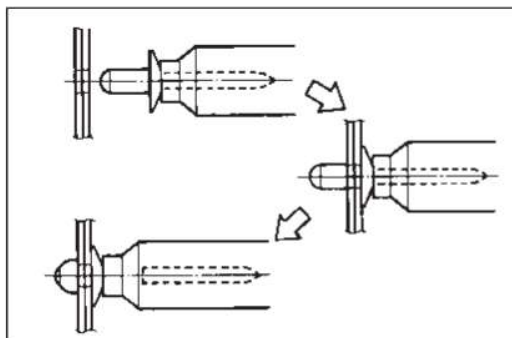


- (4) Insert the nose piece to the riveter and then the mandrel of the new rivet into the nose piece.
- (5) Vertically insert the rivet into a hole and keep place it strongly.

NOTE:


- If the tip of the rivet is not deformed or the mandrel is not cut, repeat process (5) again.

IN-18


INTRODUCTION – Rivet Removal and Installation

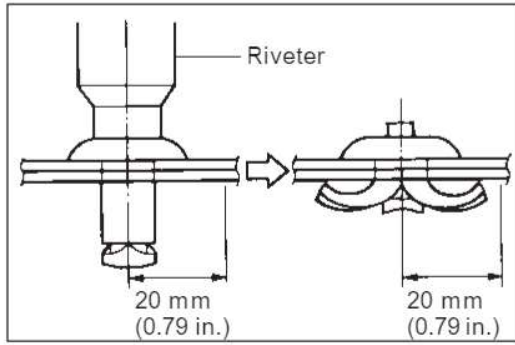


- **T-Rivet with $\varnothing 6.4$ mm:**
Do not place your hands or the wire harness within a radius of 20 mm (0.79 in.) from the rivet, as the rivet is cut and opened in this area.

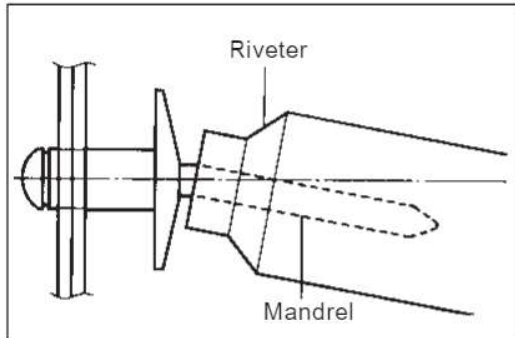


- **Prizing a riveter damages the riveter showing that it is not tightened correctly and bends the mandrel.**

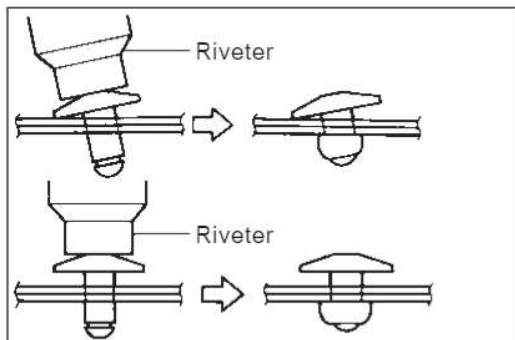

- **Loose tightening may result from either tilting the riveter while handling or the riveter not connecting to the material.**

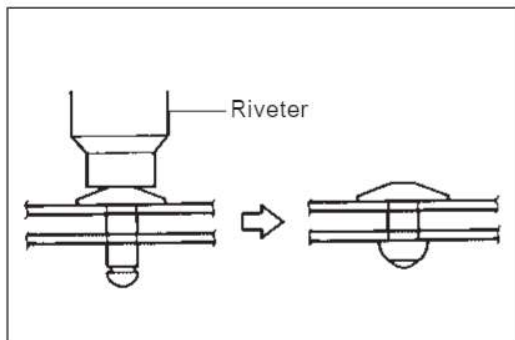

- **Loose tightening also occurs when a rivet is applied between materials without touching.**

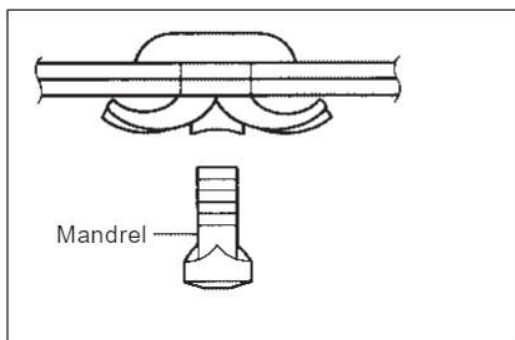

- **T-Rivet with $\varnothing 6.4$ mm:**
When a mandrel of a rivet is lost, the rivet should be replaced to prevent loose tightening.

GENERAL INFORMATION


Anti-rust treatment is necessary before welding and before and after the painting process.

ANTI-RUST TREATMENT BEFORE WELDING

1. WELD-THROUGH PRIMER (SPOT SEALER) APPLICATION

For anti-corrosion measures, always apply the weld-through primer (spot sealer) to welding surfaces where the paint film has been removed.

HINT: Apply the weld-through primer (spot sealer) so that it does not ooze out from the joining surfaces.

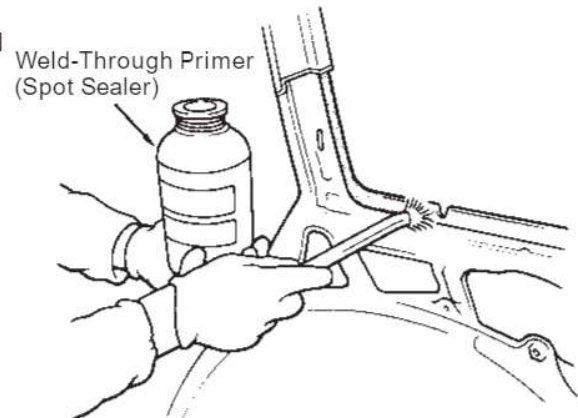


WELD-THROUGH PRIMER (SPOT SEALER) APPLICATION

ANTI-RUST TREATMENT BEFORE PAINTING PROCESS

1. BODY SEALER APPLICATION


For water-proofing and anti-corrosion measures, always apply the body sealer to the body panel seams and hems of the doors, hoods, etc.

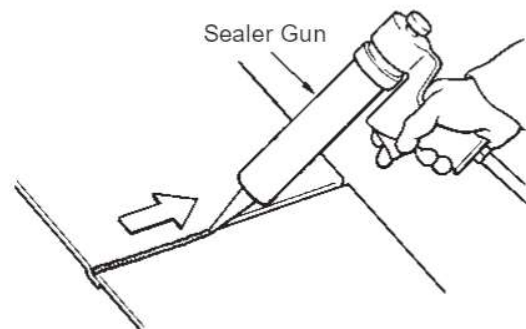

BODY SEALER APPLICATION

2. UNDERCOAT APPLICATION

To prevent corrosion and protect the body from damage by flying stones, always apply sufficient undercoat to the bottom surface of the under body and inside of the wheel housings.

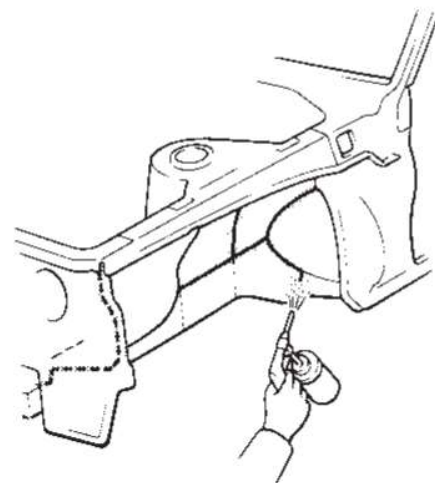


UNDERCOAT APPLICATION

cardiagn.com

ANTI-RUST TREATMENT AFTER PAINTING PROCESS

1. ANTI-RUST AGENT (WAX) APPLICATION

To preserve impossible to paint areas from corrosion, always apply sufficient anti-rust agent (wax) to the inside of the hemming areas of the doors and hoods, and around the hinges, or the welded surfaces inside the boxed cross-section structure of the side member, body pillar, etc.

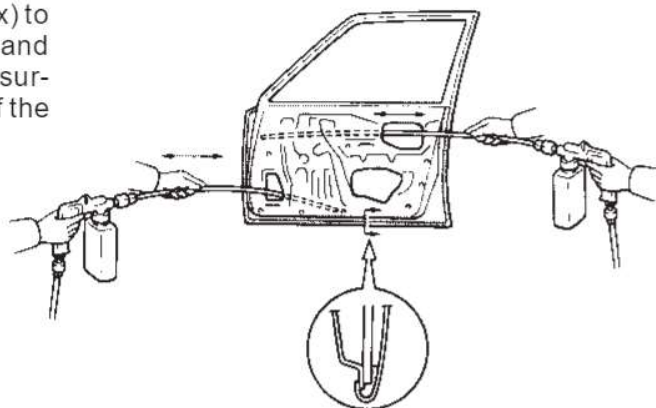

ANTI-RUST AGENT (WAX) APPLICATION

REFERENCE: ANTI-RUST TREATMENT BY PAINTING

Painting prevents corrosion and protects the sheet metal from damage. In this section, anti-chipping paint only for anti-corrosion purpose is described.


1. ANTI-CHIPPING PAINT

To prevent corrosion and protect the body from damage by flying stones, etc., apply anti-chipping paint to the rocker panel, wheel arch areas, valance panel, etc.


HINT:

Depending on the model or the application area, there are cases where the application of anti-chipping paint is necessary before the second coat or after the top coat.

- Apply the anti-chipping paint after the top coat.

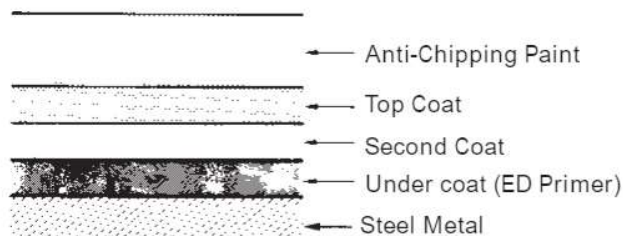

- Apply the anti-chipping paint before the second coat.

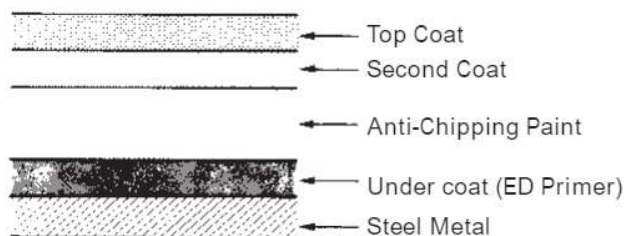


cardiagn.com

AR-4


ANTI-RUST TREATMENT – Body Panel Sealing Areas

BODY PANEL SEALING AREAS**HINT:**

1. Prior to applying body sealer, clean the area with a rag soaked in a grease, wax and silicone remover.
2. If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
3. Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.
4. If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.

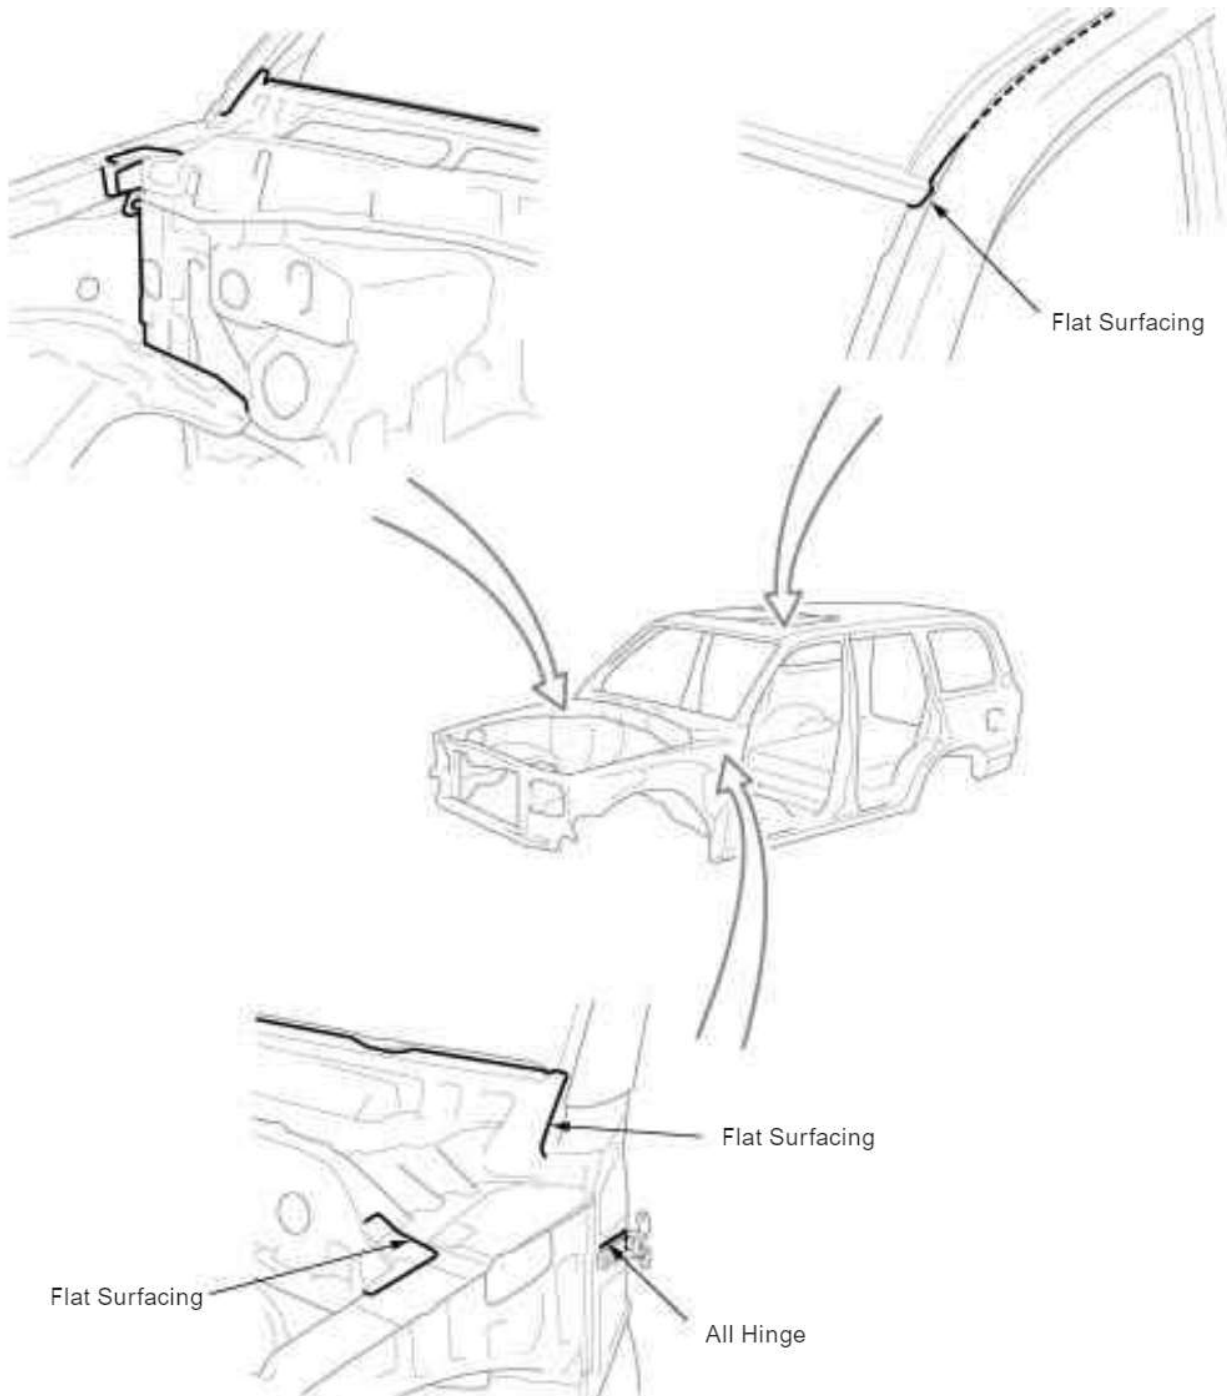


ANTI-RUST TREATMENT – Body Panel Sealing Areas

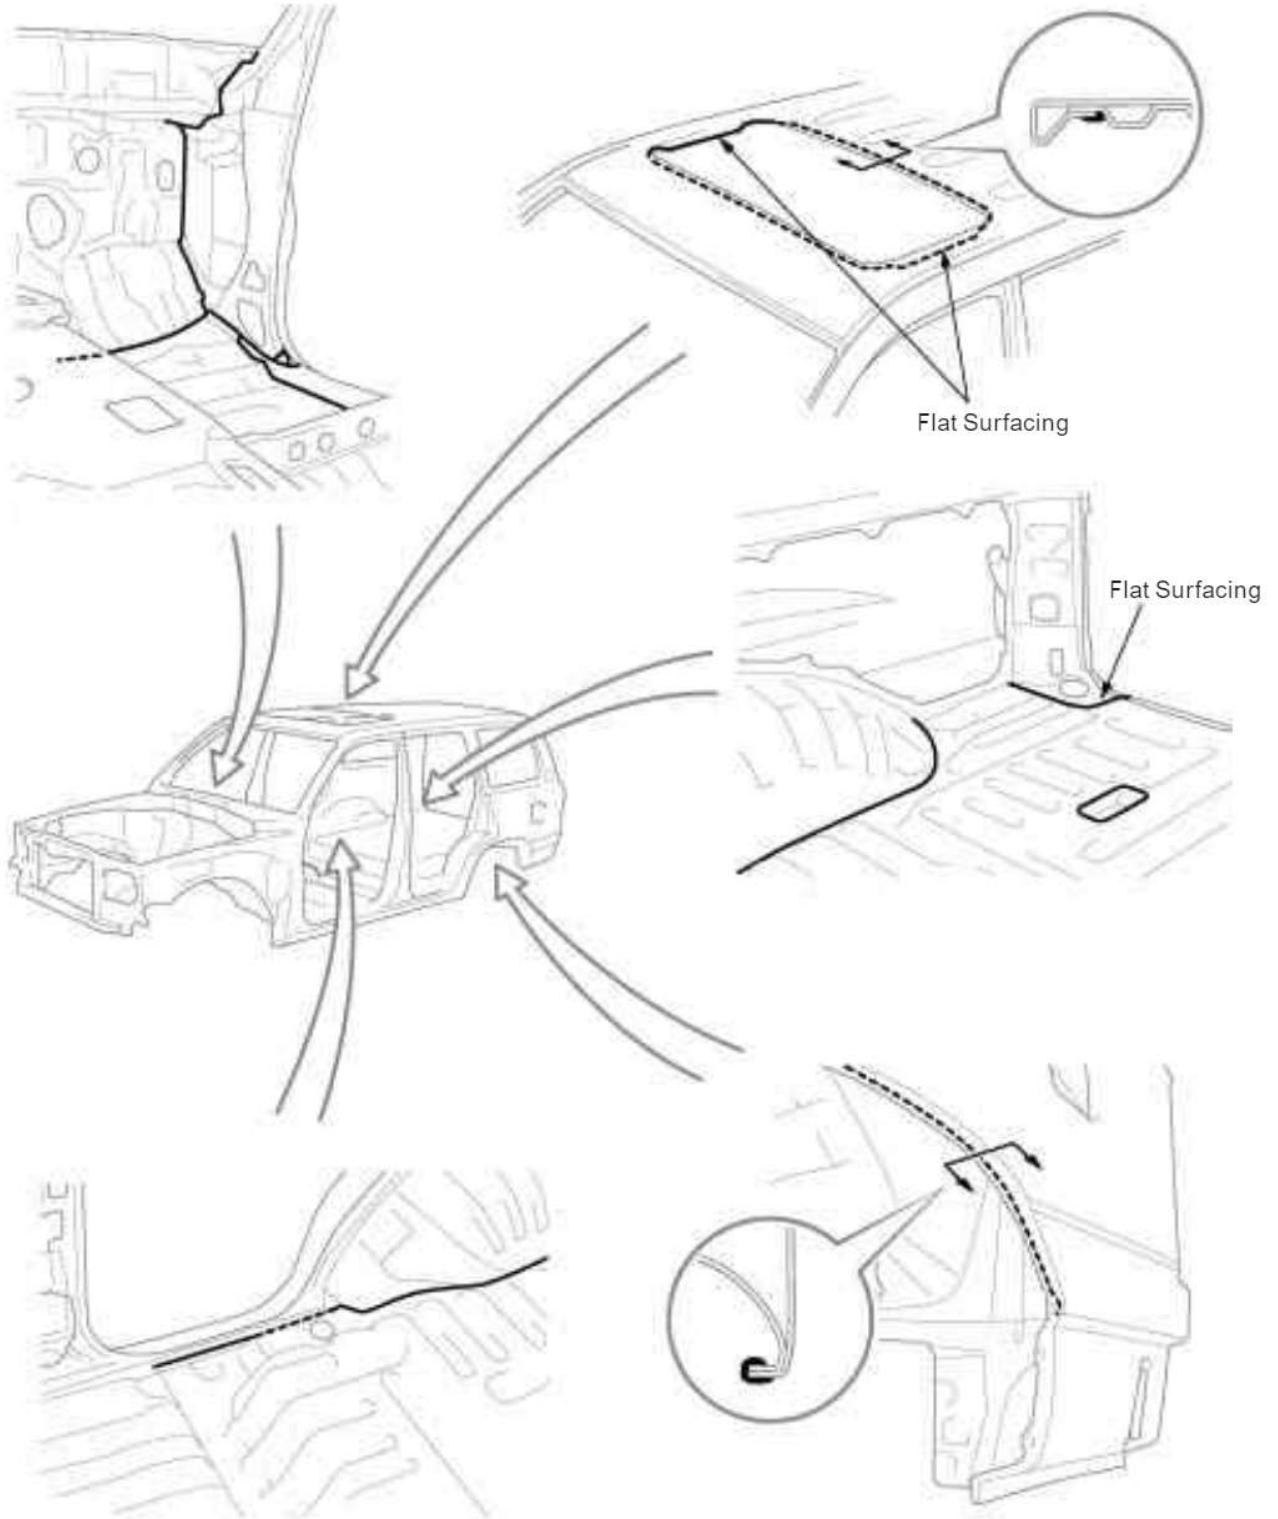

cardiagn.com


AR-6

ANTI-RUST TREATMENT – Body Panel Sealing Areas

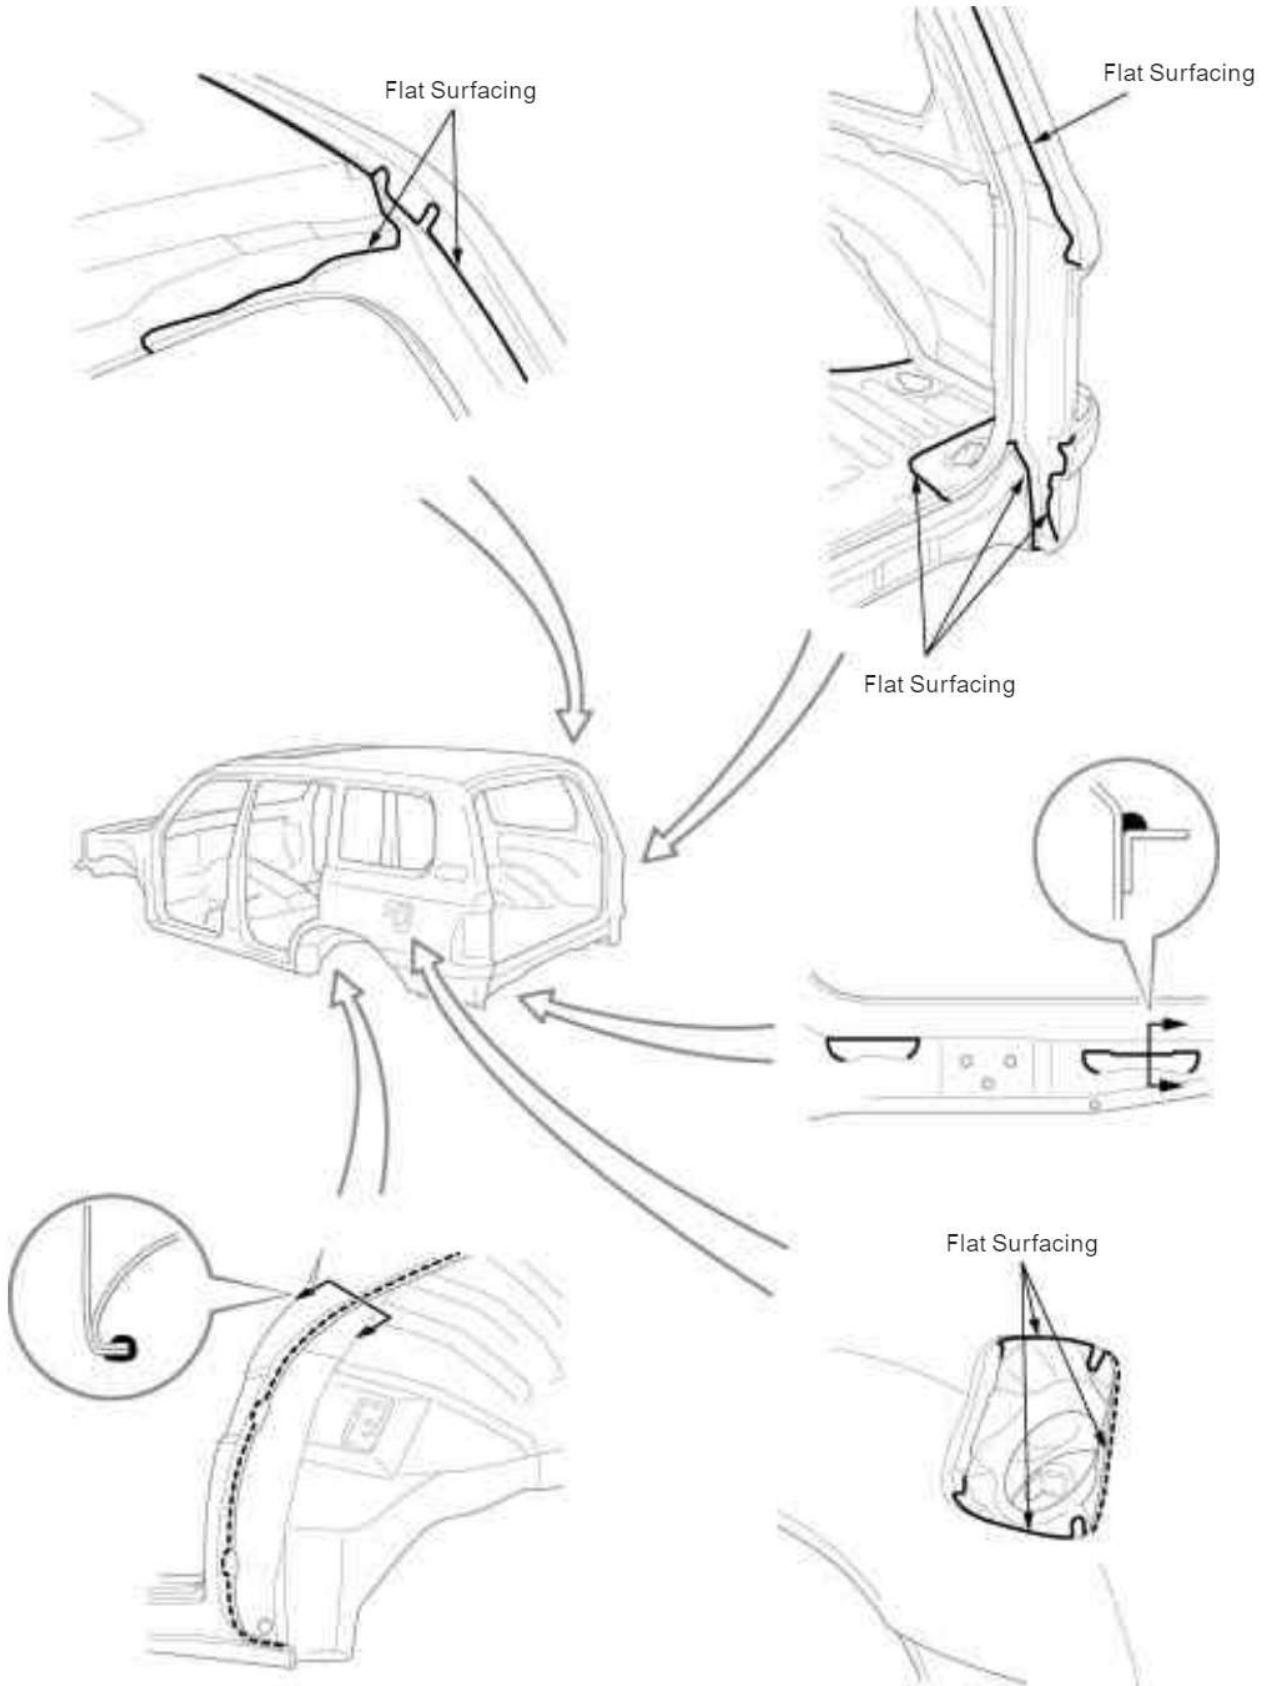

cardiagn.com


ANTI-RUST TREATMENT – Body Panel Sealing Areas

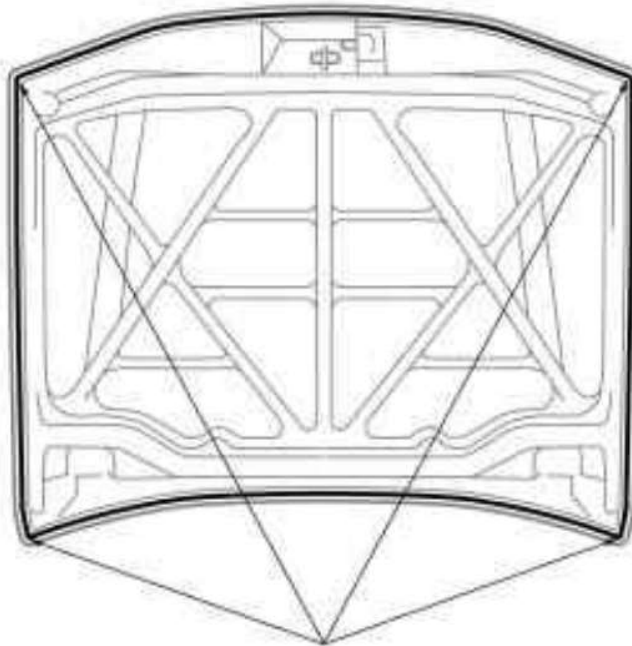

Flat Surfacing



Lift-Up Type Back Door

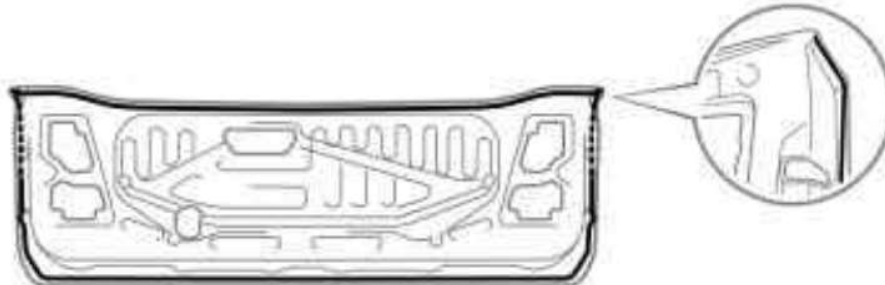


Lift-Up Type Back Door

cardiagn.com



AR-8

ANTI-RUST TREATMENT – Body Panel Sealing Areas

Swing Type Back Door

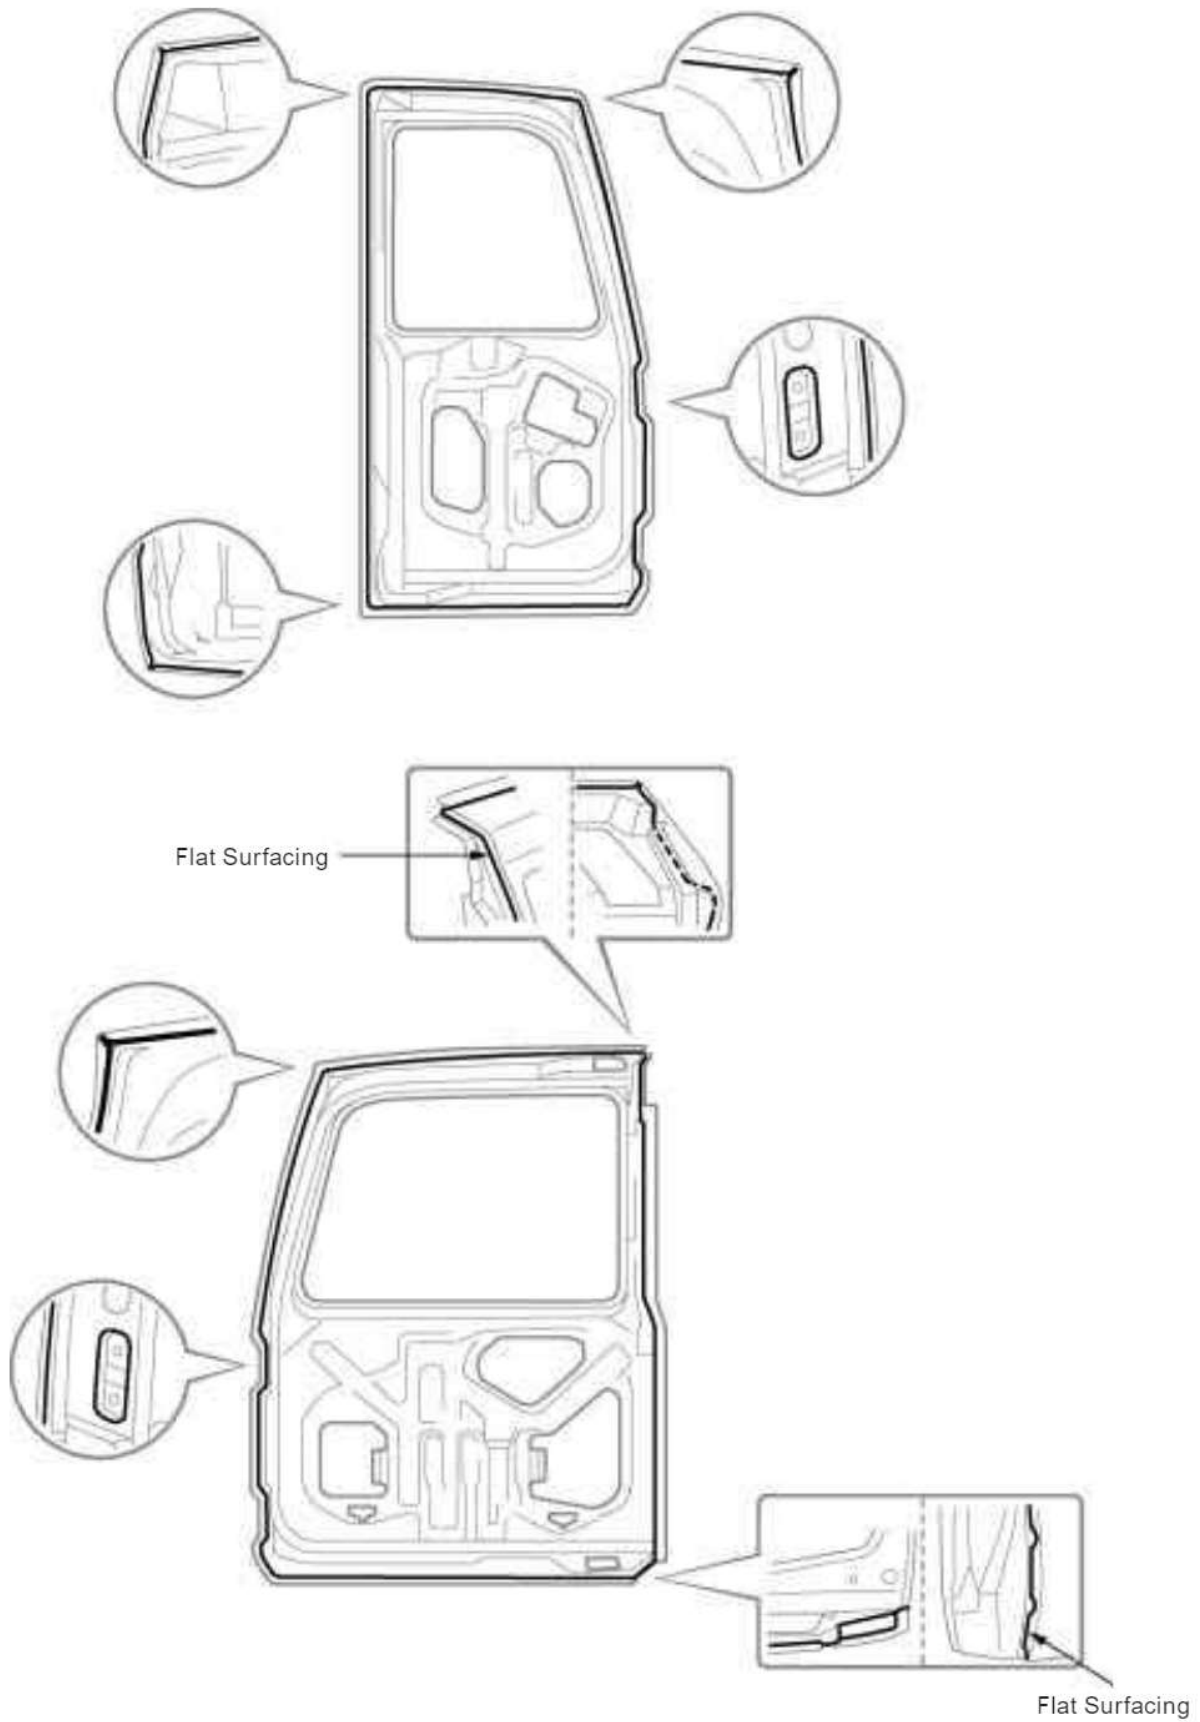


ANTI-RUST TREATMENT – Body Panel Sealing Areas

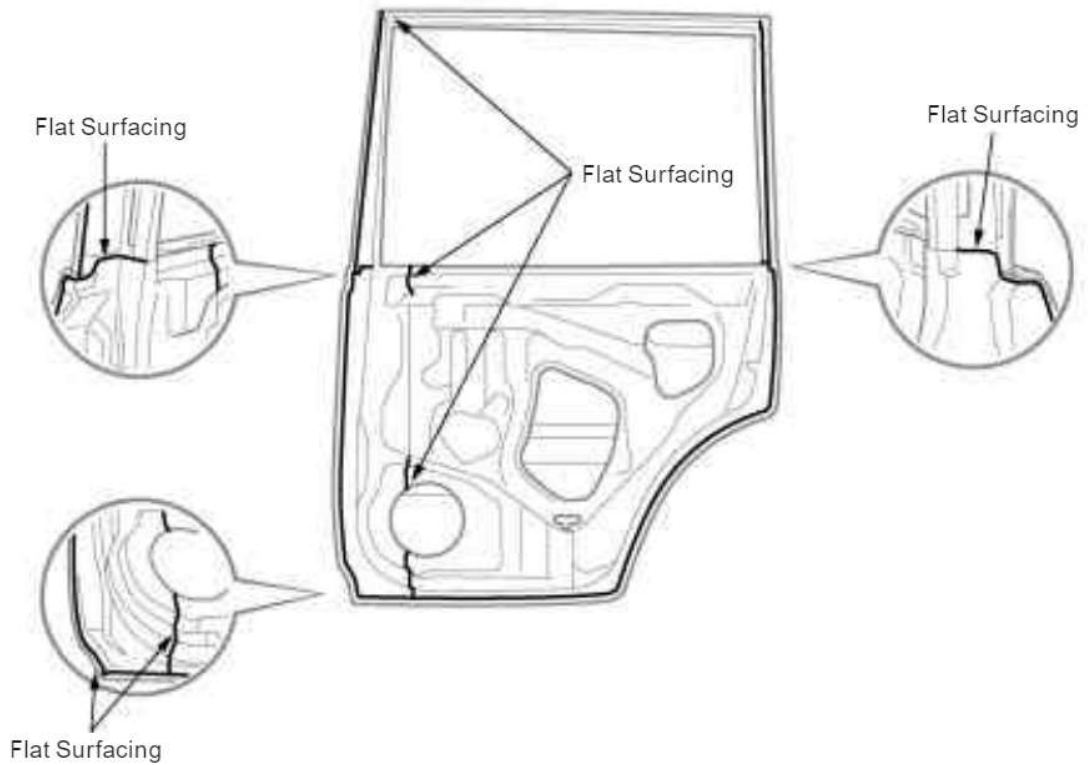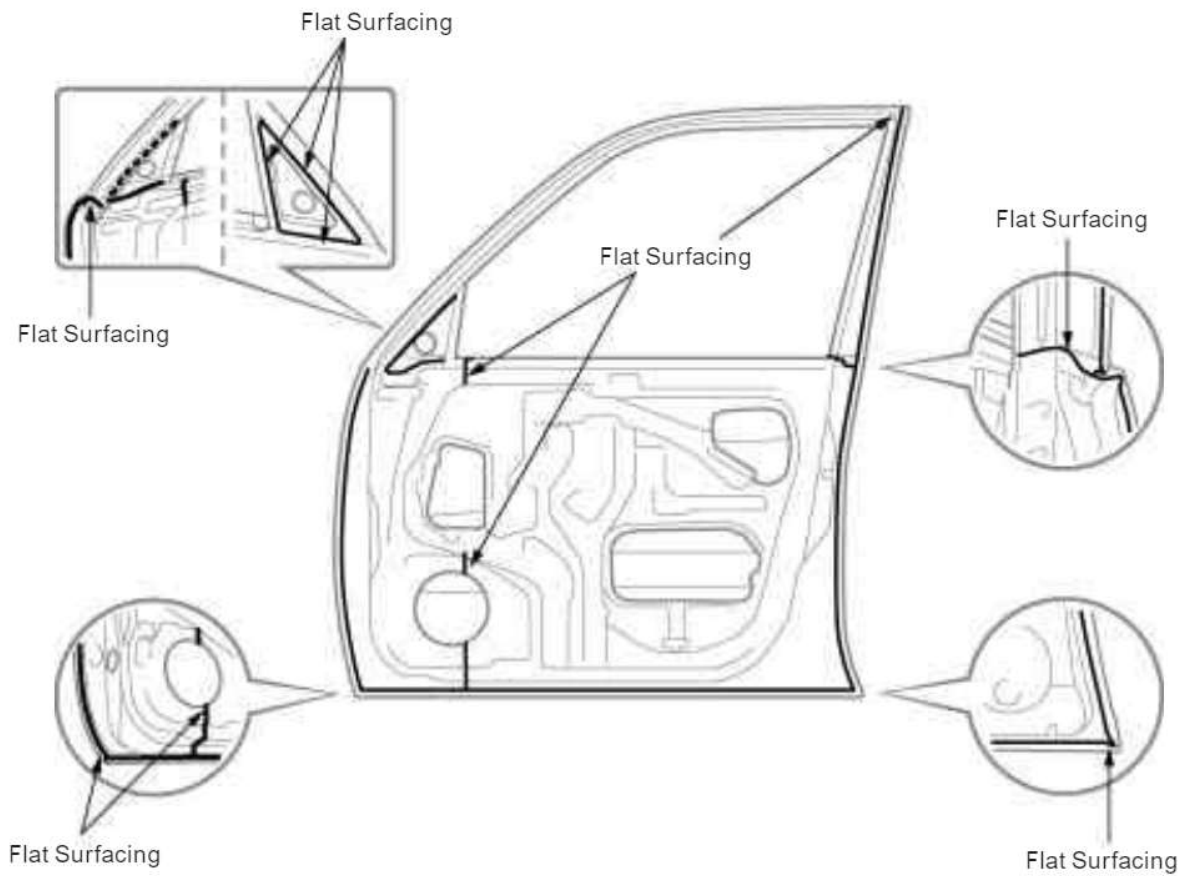

cardiagn.com

AR-10 ANTI-RUST TREATMENT – Body Panel Anti-Chipping Paint Application Areas**BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS****HINT:**


1. *Anti-chipping paint should be applied to some areas before the second coat and to others after the top coat.*
2. *If other areas are accidentally coated, wipe of the paint immediately with a rag soaked in grease, wax and silicone remover.*

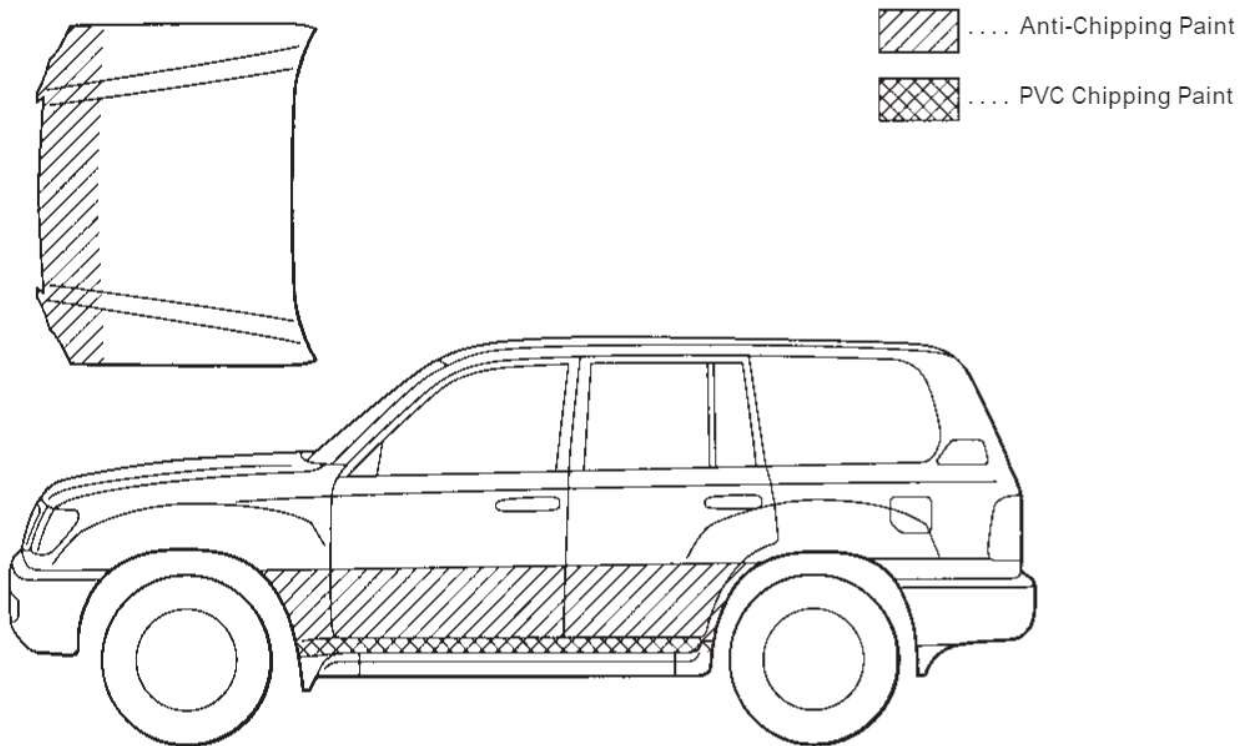

BODY PANEL UNDERCOATING AREAS

HINT:

1. First wipe off any dirt, grease or oil with a rag soaked in a grease, wax and silicone remover.
2. Cover the surrounding areas with masking paper to avoid coating unnecessary areas. If other areas are accidentally coated, wipe off the coating immediately.
3. Apply the first coating of undercoat to all welded areas and panel joints, then apply a second coat over the entire area.
4. Do not coat parts which become hot, such as the tailpipe, or moving parts, such as the propeller shaft.
5. Besides the locations described below, apply undercoating to all weld points under the body to insure corrosion prevention.
6. Be sure to seal the edge of the flange of the member and bracket with undercoating.
7. If undercoat is damaged by peeling, cracks, etc., be sure to repair as necessary.
8. Before the undercoat apply sealer allowing rust prevention to be attained.

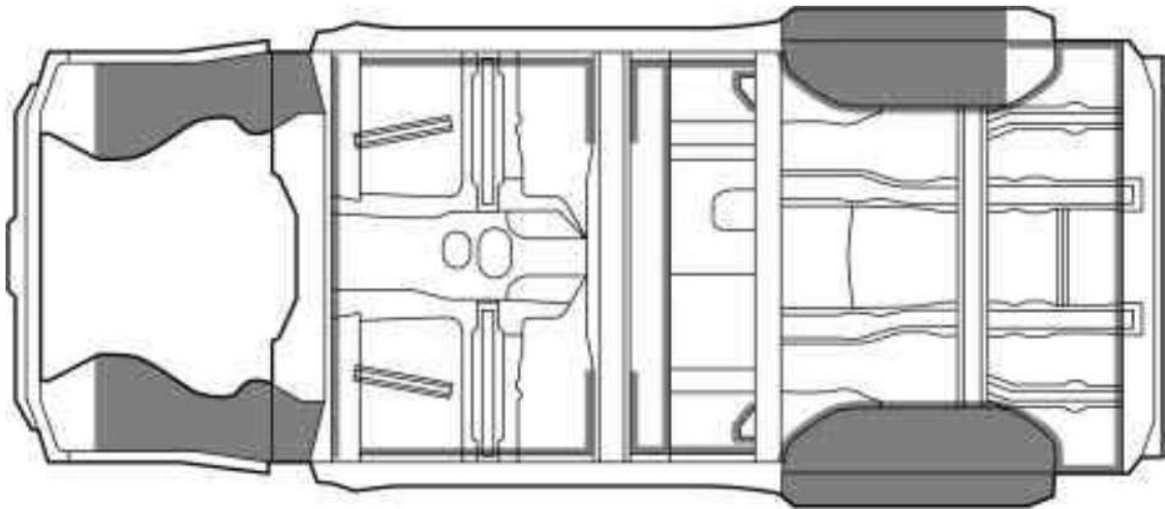

REFERENCE: Referring to the notes above, undercoating should be applied according to the specifications for your country.


AR-12 ANTI-RUST TREATMENT – Body Panel Anti-Rust Agent (Wax) Application Areas

BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:

1. Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2. Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3. Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidentally applied to other areas.

LIFT-UP TYPE BACK DOOR

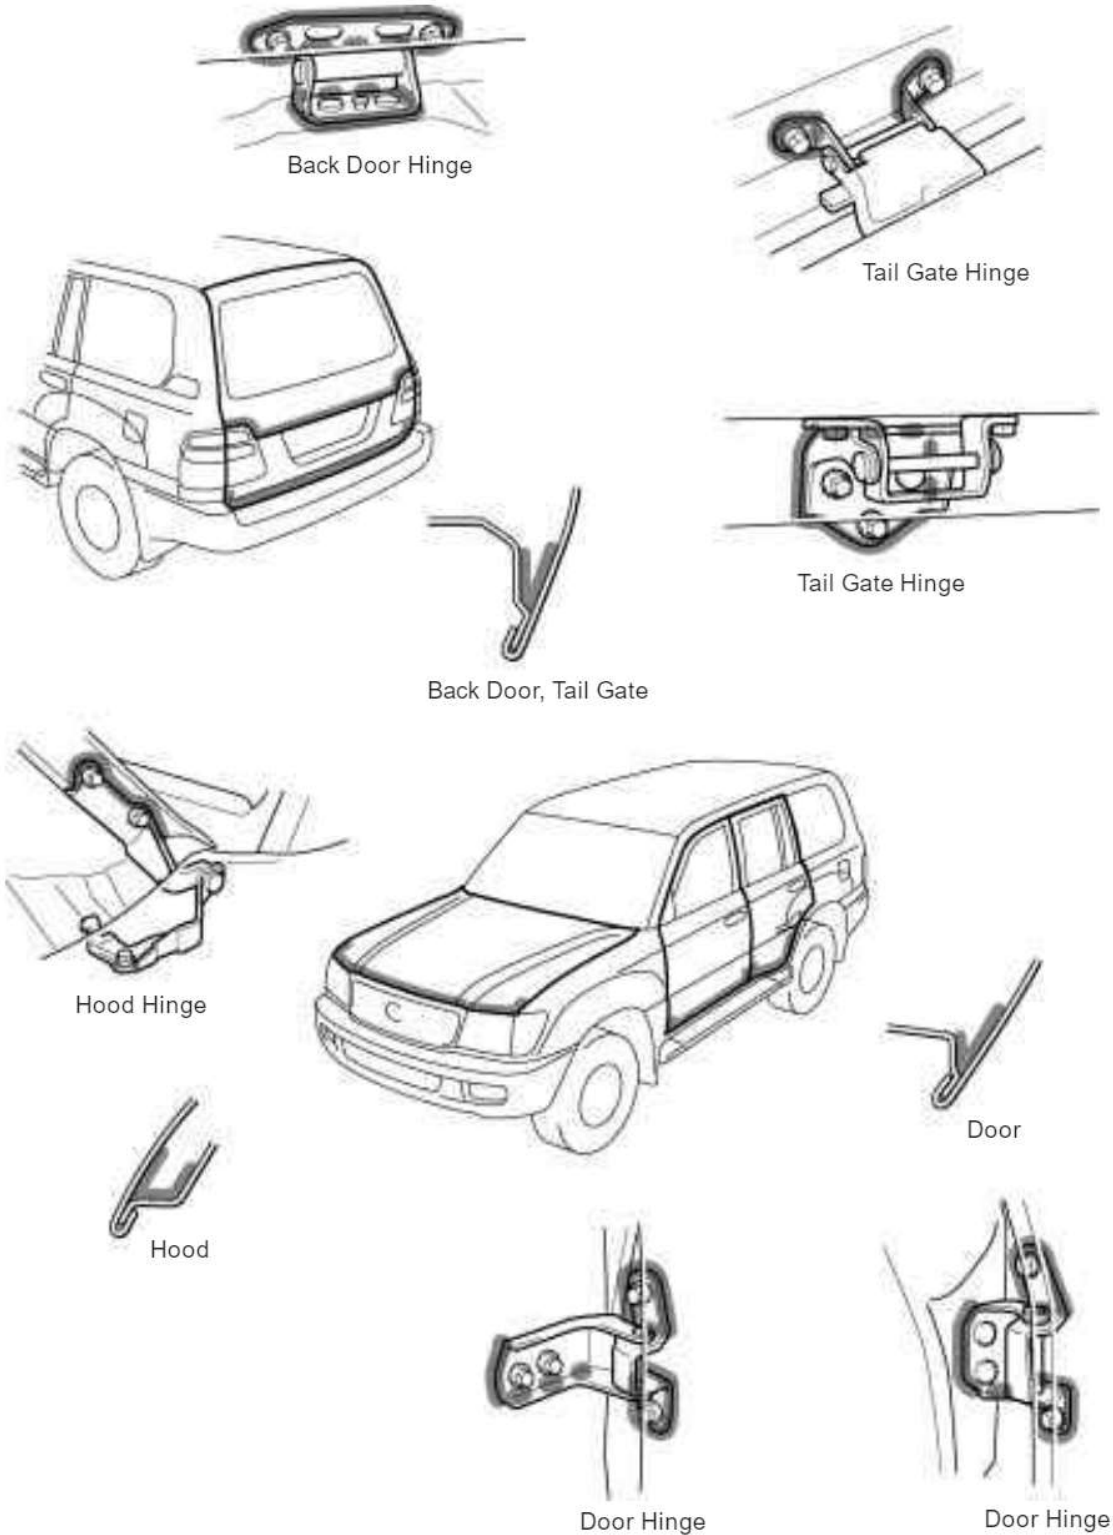


cardiagn.com

RUST-RESISTANT SHEET STEEL PARTS

Rust-Resistant Sheet Steel have zinc, tin or aluminum etc, plating over the base metal surface in order to improve the corrosion resistance of the sheet metal. This sheeting is used on areas that require anti-corrosive abilities but there is no need to distinguish the differences between rust resistant sheet steel and ordinary sheet steel in body repair.

Body panels on TOYOTA models are made of two different melted galvanized sheet steel. The ordinary melted galvanized sheet has a zinc plating over the base metal surface and when heated a zinc-iron alloy plating. The zinc-iron double layered galvanized sheet has a iron rich and another zinc-rich layer above the sheet steel. These 2 layers improve paint adhesion. These two melted galvanized sheet steels are used selectively according to need.

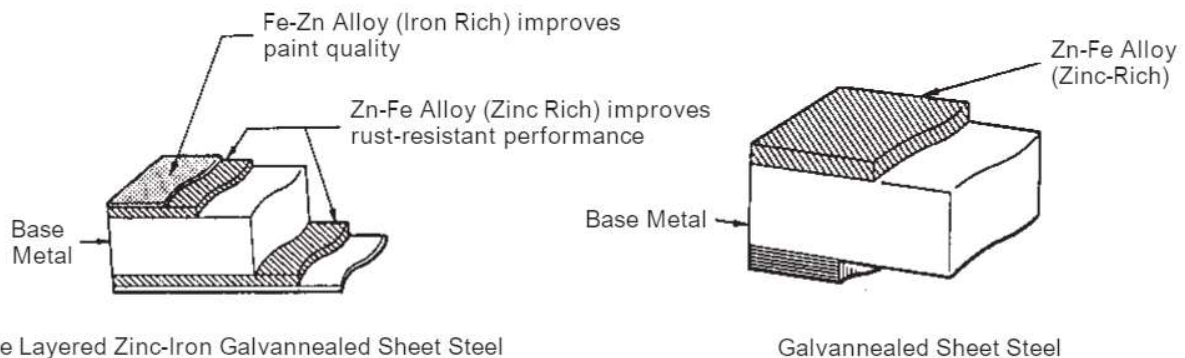


Double Layered Zinc-Iron Galvanized Sheet Steel

Galvanized Sheet Steel

The handling of Rust-Resistant Sheet Steel is the same as for ordinary sheet steel, but the following should be observed.

1. **Panel Welding:** The paint as well as the zinc portion must be removed completely from the welding area to guarantee good welding integrity.
2. **Anti-Rust Treatment:** Since the zinc plating is lost after welding, anti-rust treatment of the welded area must be thoroughly performed (refer to section AR).

BODY PANEL CONSTRUCTION – Rust-Resistant Sheet Steel Parts

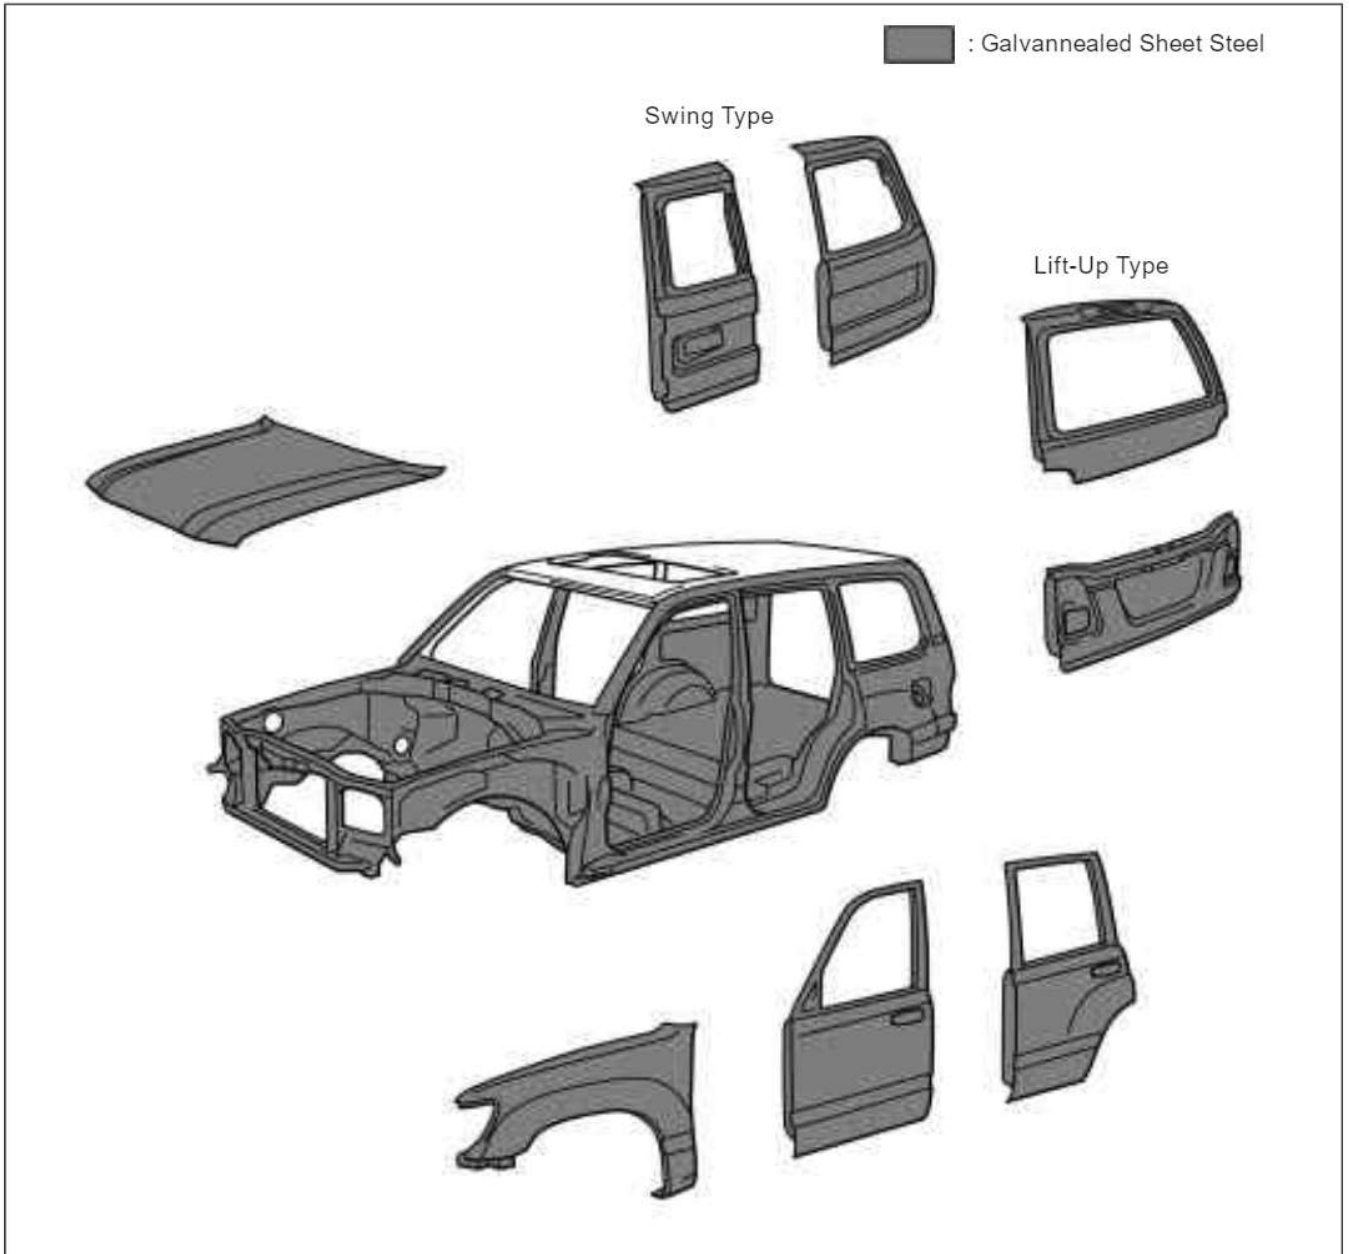

CN-4


BODY PANEL CONSTRUCTION – High-Strength Steel Parts

HIGH-STRENGTH STEEL (HSS) PARTS

Generally, High-Strength Steel (HSS) is that which has an intensity value of at 35 kgf/mm^2 (343 MPa), and distinguished from mild steel.






The handling of HSS is the same as for mild steel, but the following should be observed.

1. Panel Hammering: Because HSS is thinner than mild steel, care should be taken to avoid warping during hammering operations.
2. Removing Spot Welds: Because HSS is tougher than mild steel, damage will occur more easily to a regular drill. Therefore, an HSS Spot Cutter is recommended. Also, use a high-torque drill at low speed, and supply grinding oil to the drill use.
3. Panel Welding: Panel welding procedures for HSS are exactly the same as for mild steel. Plug welding should be done with MIG (Metal Inert Gas) welder. Do not gas weld or braze panels at areas other than specified.

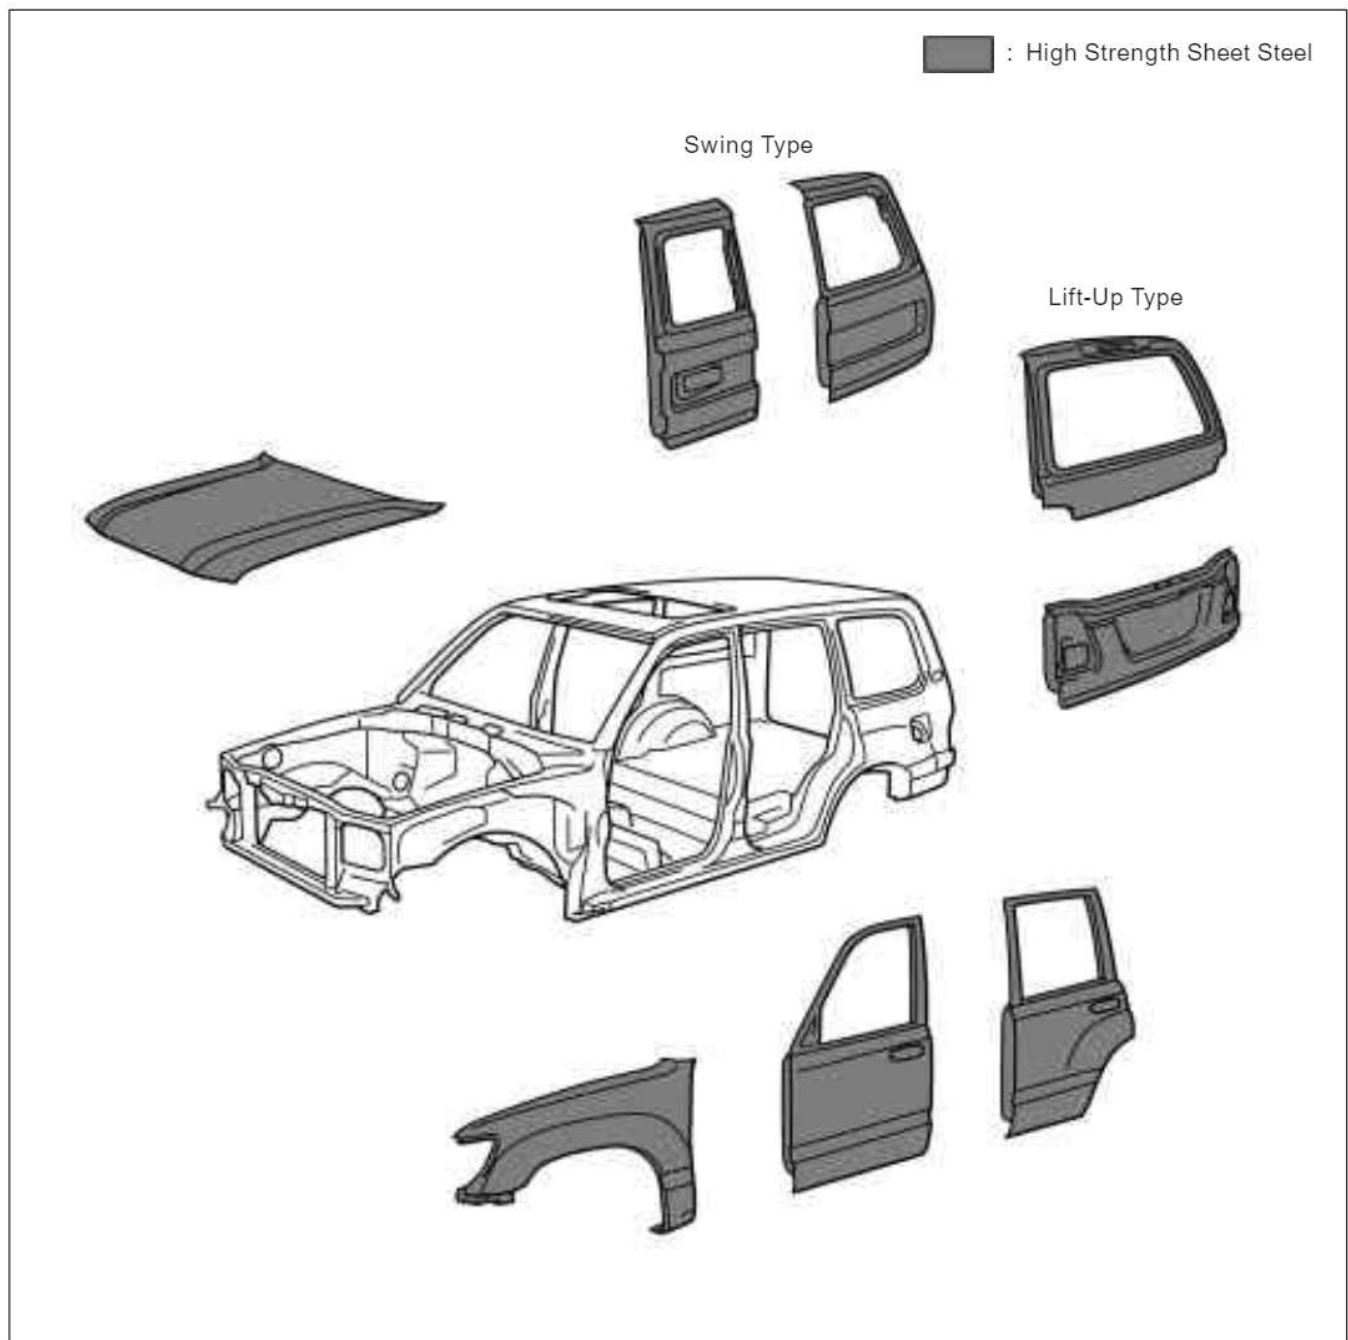

DI-2

BODY DIMENSIONS – General Information

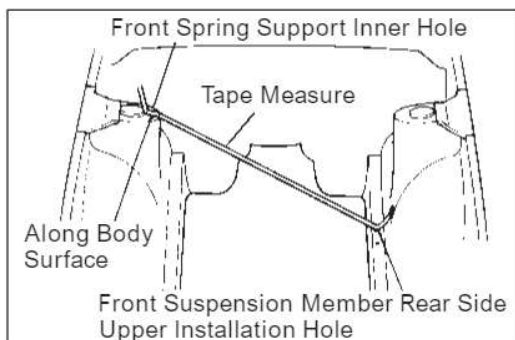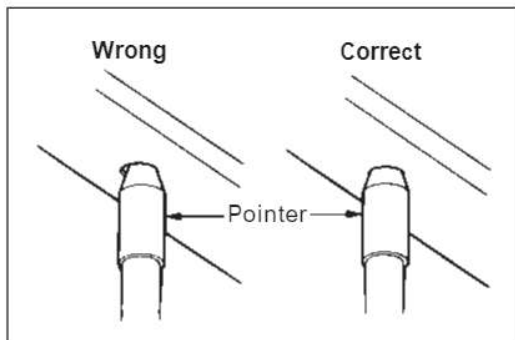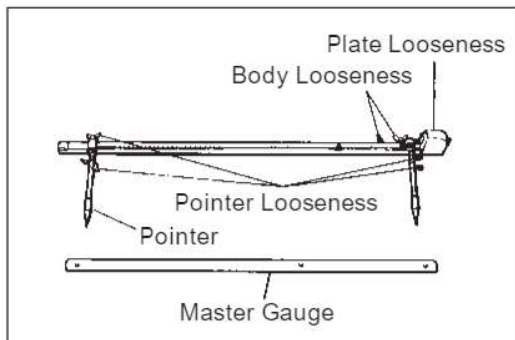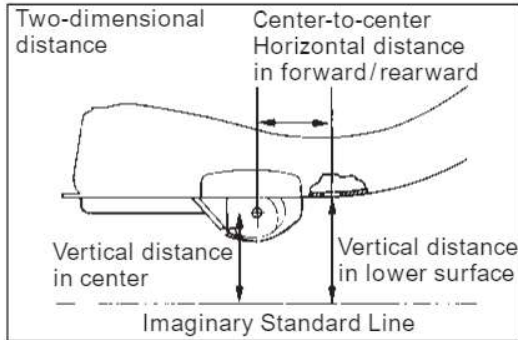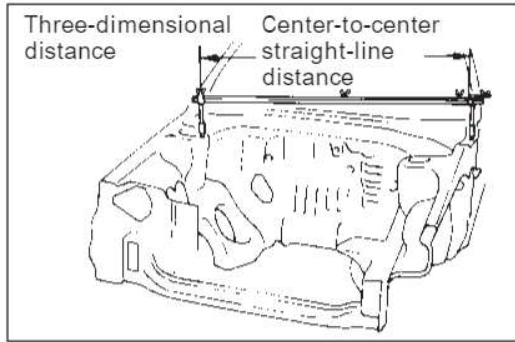

GENERAL INFORMATION

1. BASIC DIMENSIONS

- (a) There are two types of dimensions in the diagram. (Three-dimensional distance)
- Straight-line distance between the centers of two measuring points.

(Two-dimensional distance)

- Horizontal distance in forward/rearward between the centers of two measuring points.
 - The height from an imaginary standard line.
- (b) Incases in which only one dimension is given, left and right are symmetrical.
- (c) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.

2. MEASURING

- (a) Basically, all measurements are to be done with a tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.
- (b) Use only a tracking gauge that has no looseness in the body, measuring plate, or pointers.

HINT:


1. The height of the left and right pointers must be equal.
2. Always calibrate the tracking gauge before measuring or after adjusting the pointer height.
3. Take care not to drop the tracking gauge or otherwise shock it.
4. Confirm that the pointers are securely in the holes.

- (c) When using a tape measure, avoid twists and bends in the tape.
- (d) When tracking a diagonal measurement from the front spring support inner hole to the suspension member upper rear installation hole, measure along the front spring support panel surface.

BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

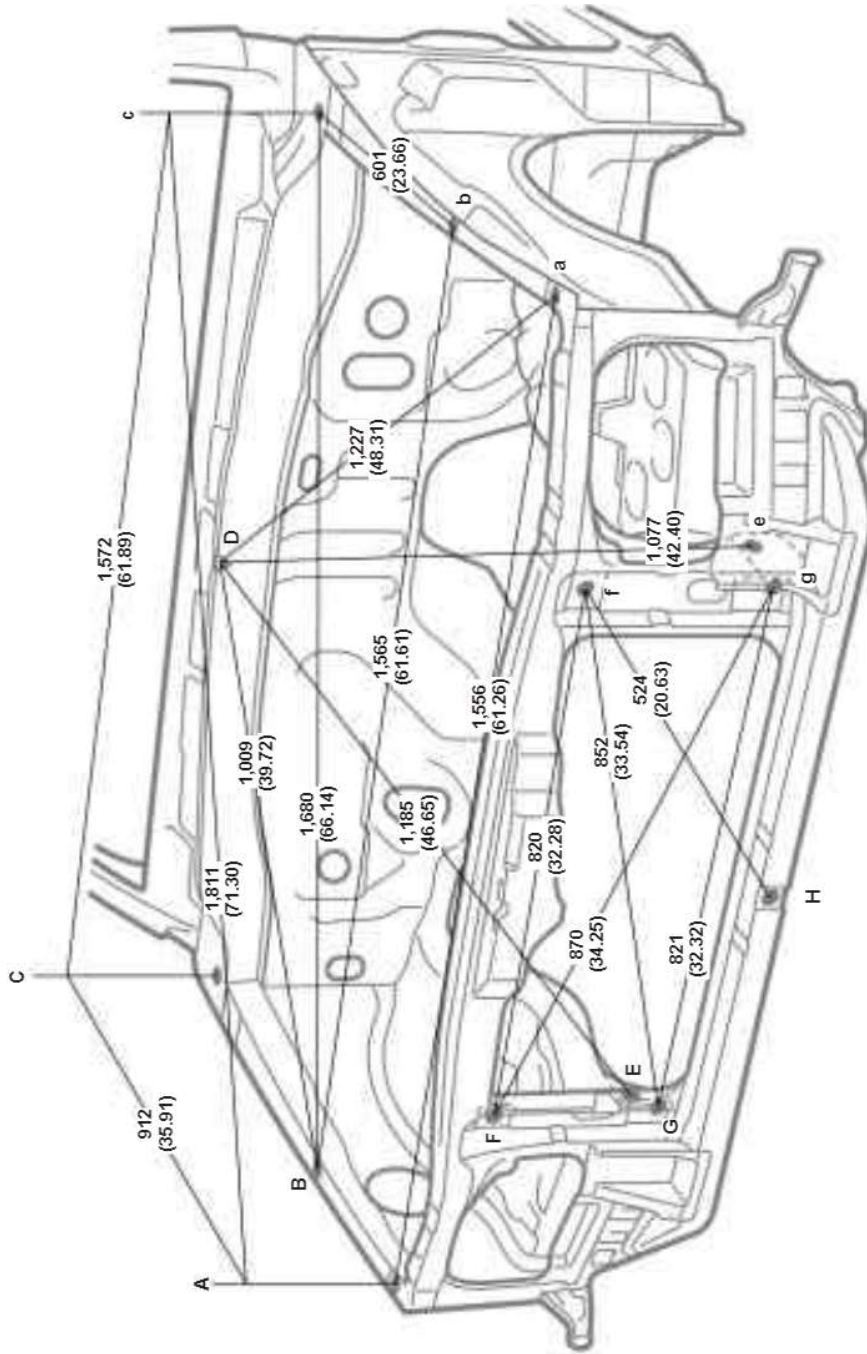


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	F, f	Radiator installation hole	12 (0.47)
B, b	Front fender installation nut	6 (0.24) nut	G	Radiator installation hole	9 (0.35)
C, c	Front fender installation nut	6 (0.24) nut	H	Radiator installation hole	11 x 9 (0.43 x 0.35)
D	Cowl top panel vehicle center mark	—	—	Hood lock support installation nut	6 (0.24) nut
E, e	Front fender apron standard hole	10 (0.39)	—	—	—

cardiagn.com

**BODY OPENING AREAS
(Side View-Front)**

(Three-Dimensional Distance)

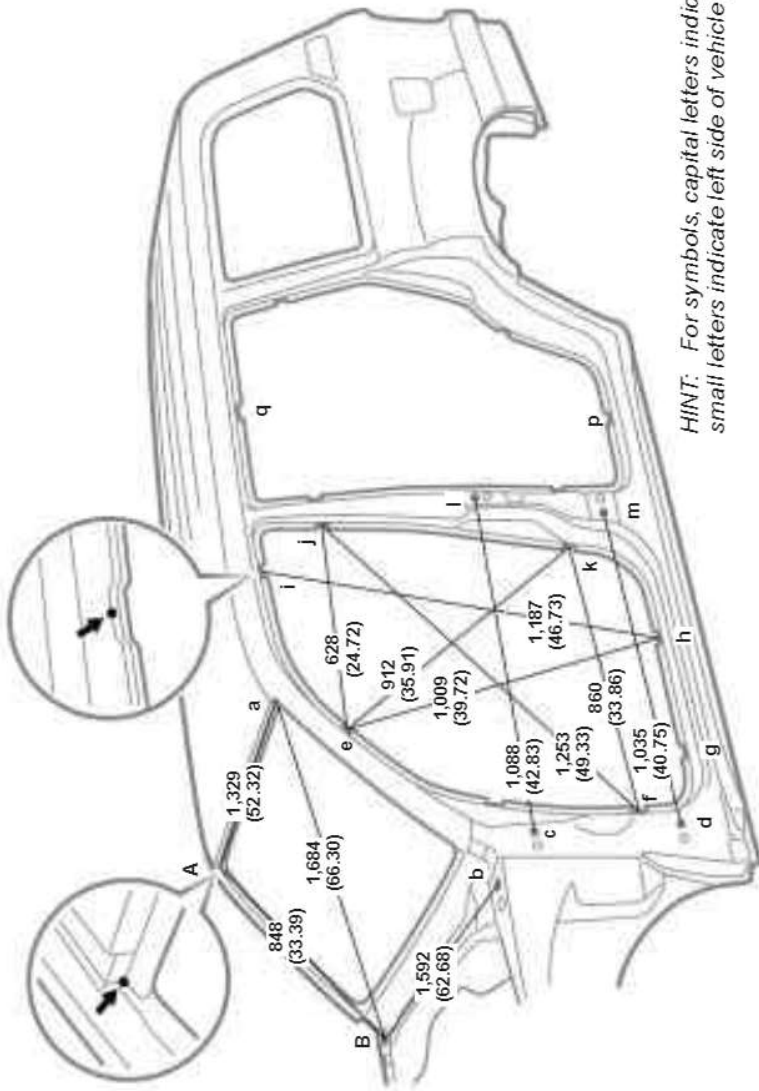

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,438 (56.61)	1,599 (62.95)	1,608 (63.31)	1,614 (63.54)	1,340 (52.76)	1,472 (57.95)	1,610 (63.39)


E-f or e-F	E-j or e-J	F-k or f-K	G-p or g-P	H-h or h-H	I-q or i-Q	J-k or j-K
1,757 (69.17)	1,585 (62.40)	1,980 (77.95)	1,979 (77.91)	1,890 (74.41)	1,459 (57.44)	1,706 (67.17)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	I, i	Roof side rail assembly mark	—
B, b	Hood hinge installation nut - rear	8 (0.31) nut	J, j	Center body pillar assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	K, k	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	L, l	Rear door hinge installation hole	13 (0.51)
E, e	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	8 (0.31) nut
F, f	Front body pillar assembly mark	—	P, p	Rocker panel assembly mark	—
G, g	Rocker panel assembly mark	—	Q, q	Roof side rail assembly mark	—
H, h	Rocker panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View-Rear)

(Three-Dimensional Distance)

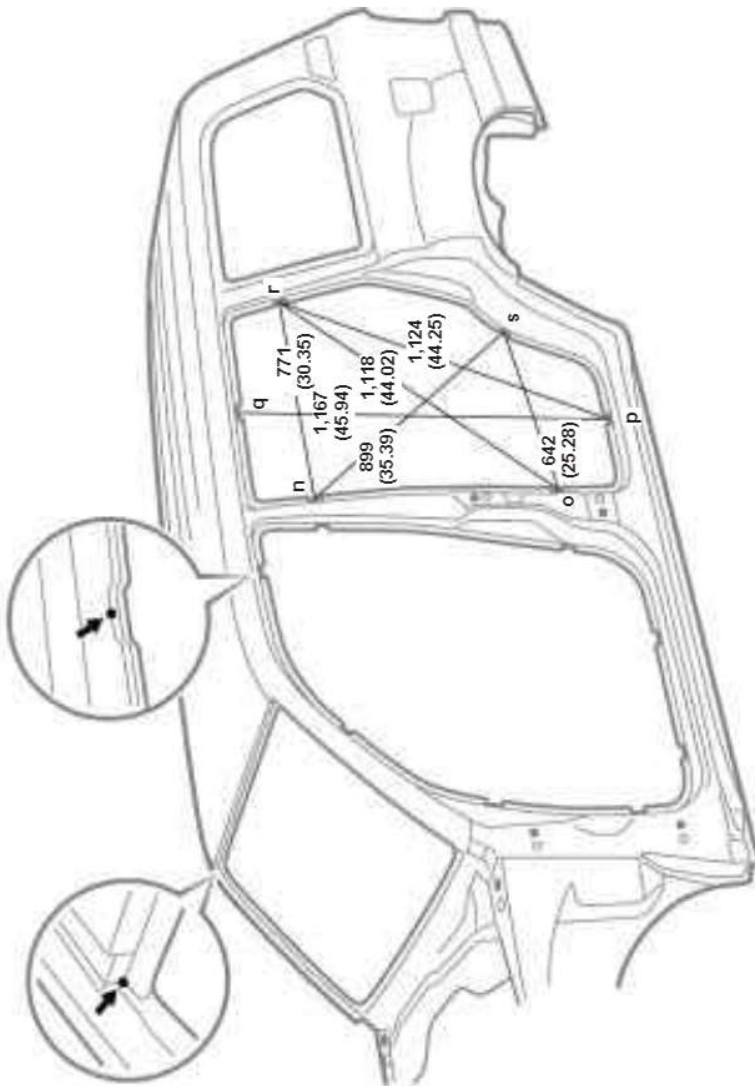

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,472 (57.95)	1,613 (63.50)	1,619 (63.74)	1,330 (52.36)	1,442 (56.77)	1,607 (63.27)


N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,649 (64.92)	1,782 (70.16)	1,734 (68.27)	1,875 (73.82)	1,692 (66.61)

Symbol	Hole dia.	Symbol	Name	Symbol	Name	Symbol	Name	Symbol	Hole dia.
N, n	—	Q, q	Center body pillar assembly mark	Q, q	Roof side rail assembly mark	—	—	—	—
O, o	—	R, r	Center body pillar assembly mark	R, r	Quarter panel assembly mark	—	—	—	—
P, p	—	S, s	Rocker panel assembly mark	S, s	Quarter panel assembly mark	—	—	—	—

mm (in.)

BODY OPENING AREAS
(Rear View: Lift-Up Type)

(Three-Dimensional Distance)

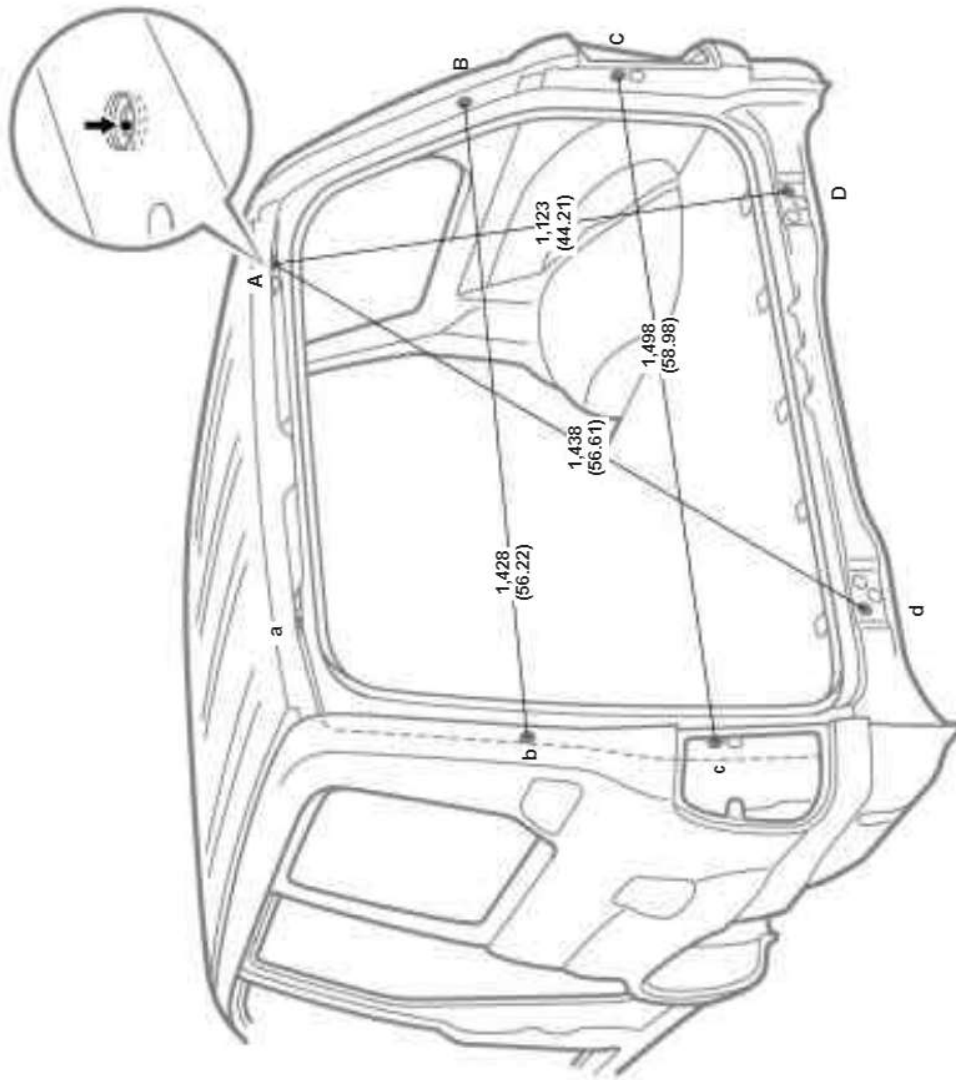


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A	Back door hinge installation hole-outer = front tip: RH	8.2 (0.323)	C, c	Tail gate lock striker installation nut	8 (0.31) nut
a	Back door hinge installation hole-outer = front tip: LH	11 x 8.2 (0.43 x 0.323)	D, d	Tail gate hinge installation nut-outer	8 (0.31) nut
B, b	Back door damper stay installation nut	8 (0.31) nut	—	—	—

**BODY OPENING AREAS
(Rear View: Swing Type)**

(Three-Dimensional Distance)

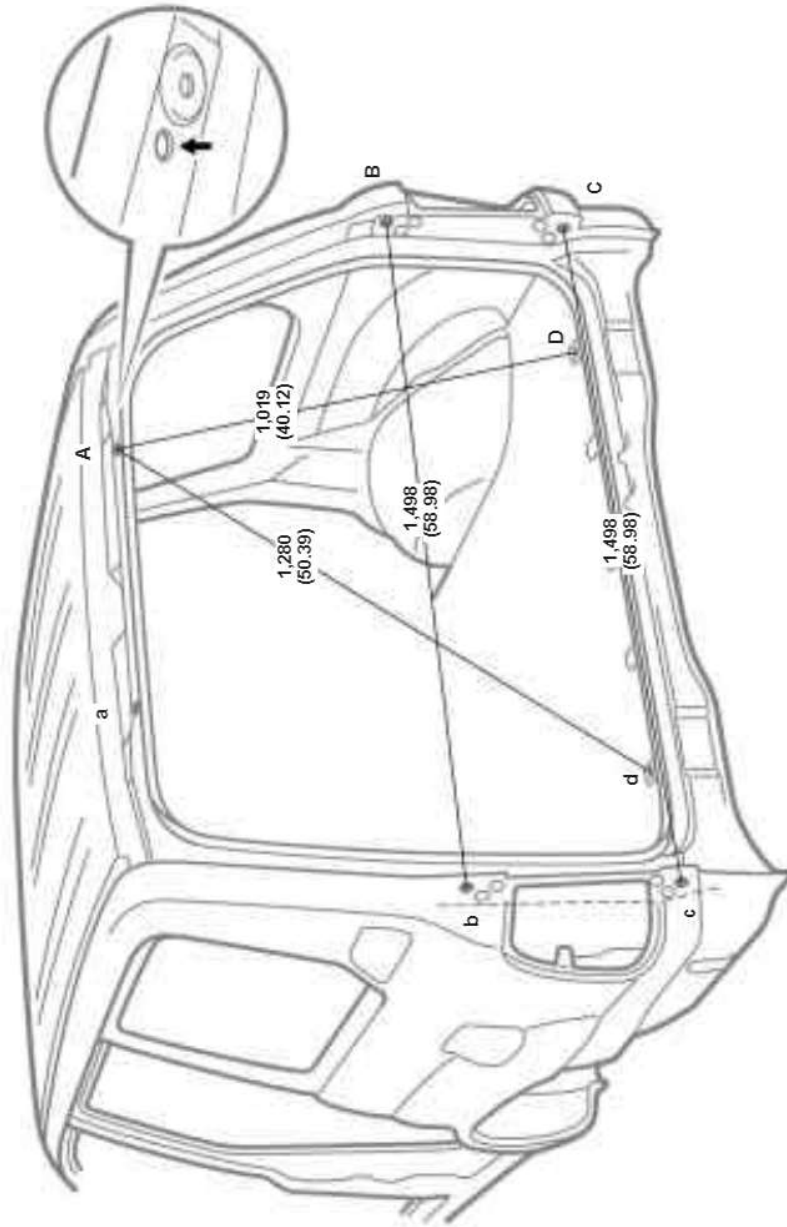


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door opening frame standard hole	10 (0.39)	C, c	Back door hinge installation nut-lower	8 (0.31) nut
B, b	Back door hinge installation nut-upper	8 (0.31) nut	D, d	Rear floor finish plate installation hole	12.5 x 8.5 (0.492 x 0.335)


FRAME DIMENSION

UZJ100 series · HDJ100, 101 series · FZJ100 series

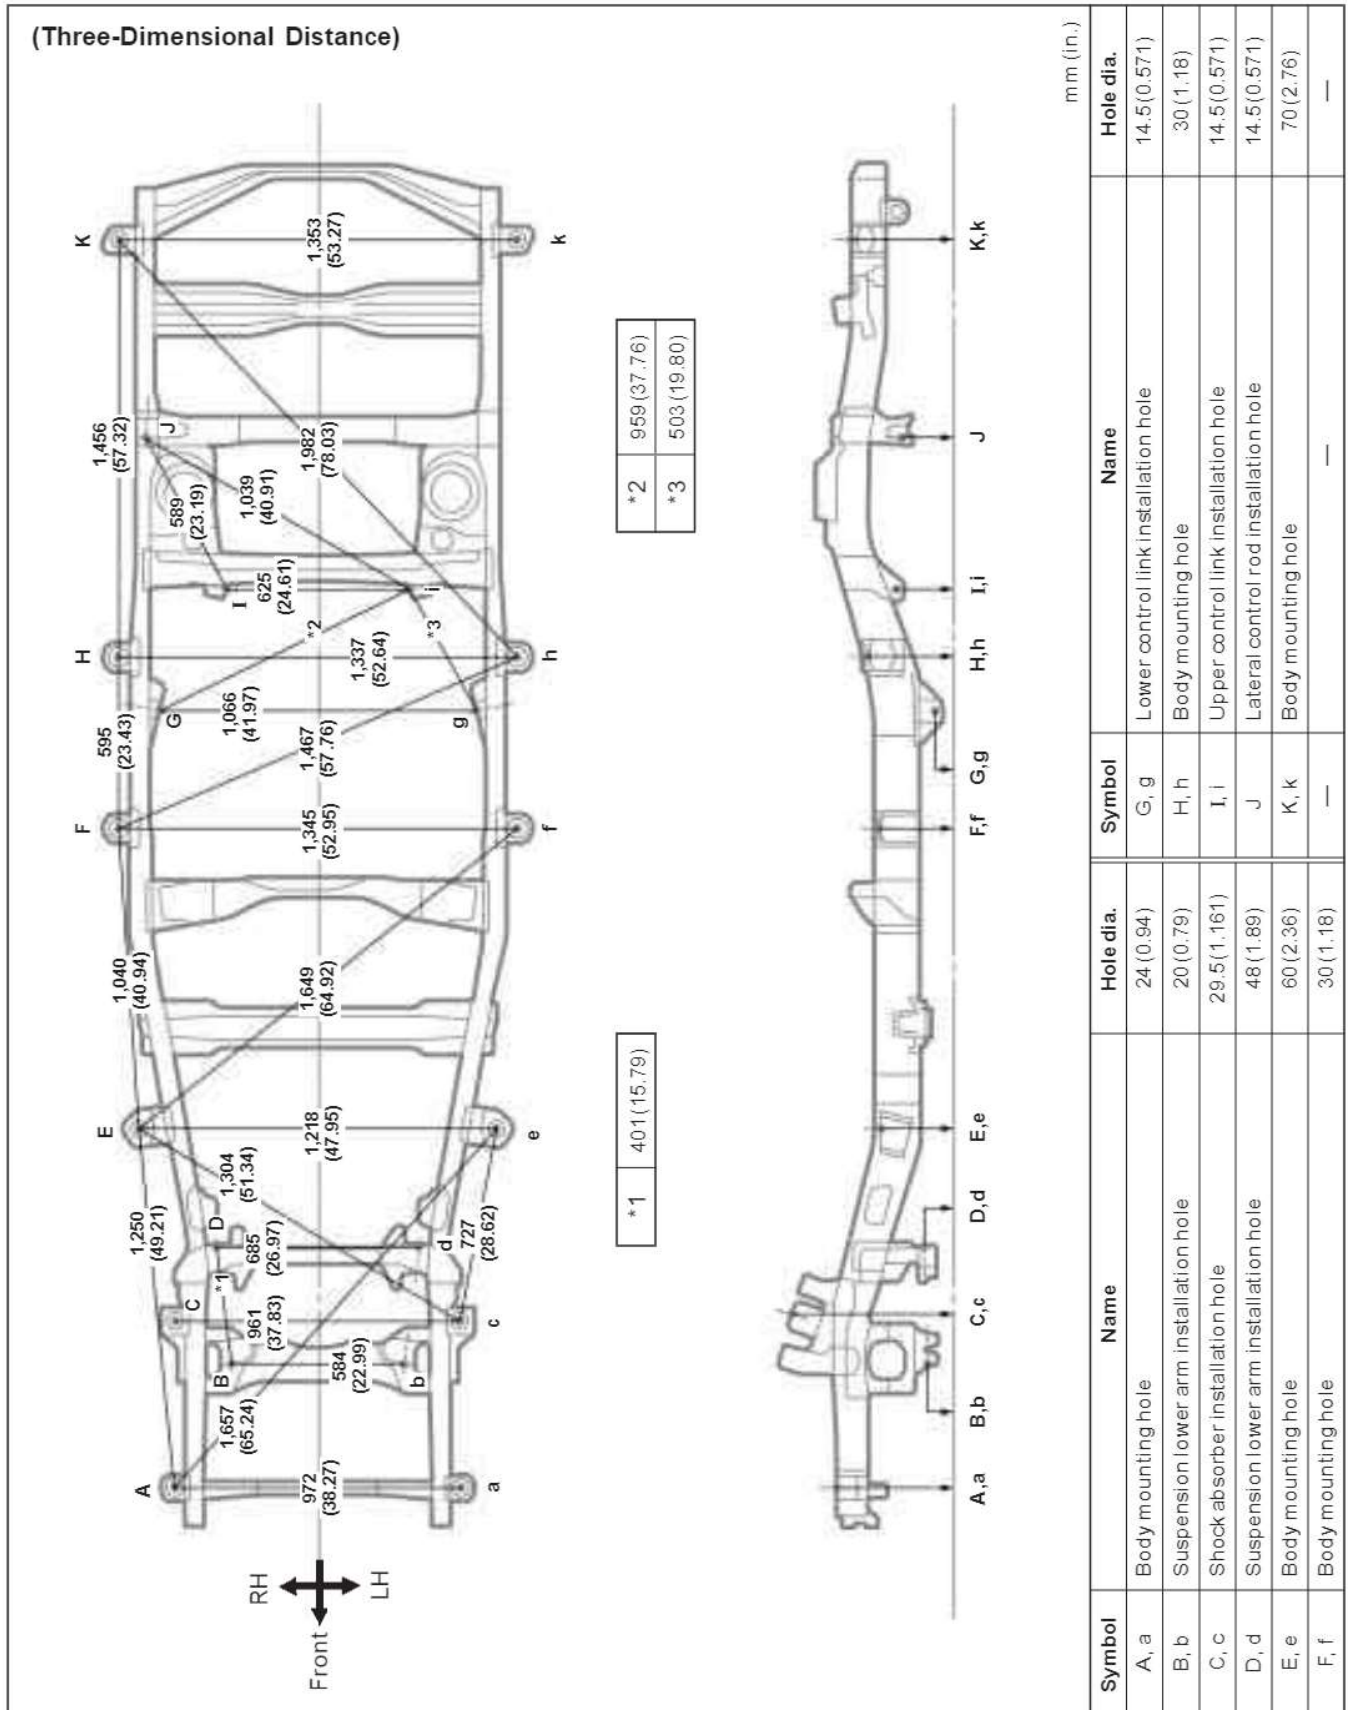

BODY DIMENSIONS – Body Dimension Drawings


FRAME DIMENSION
UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)

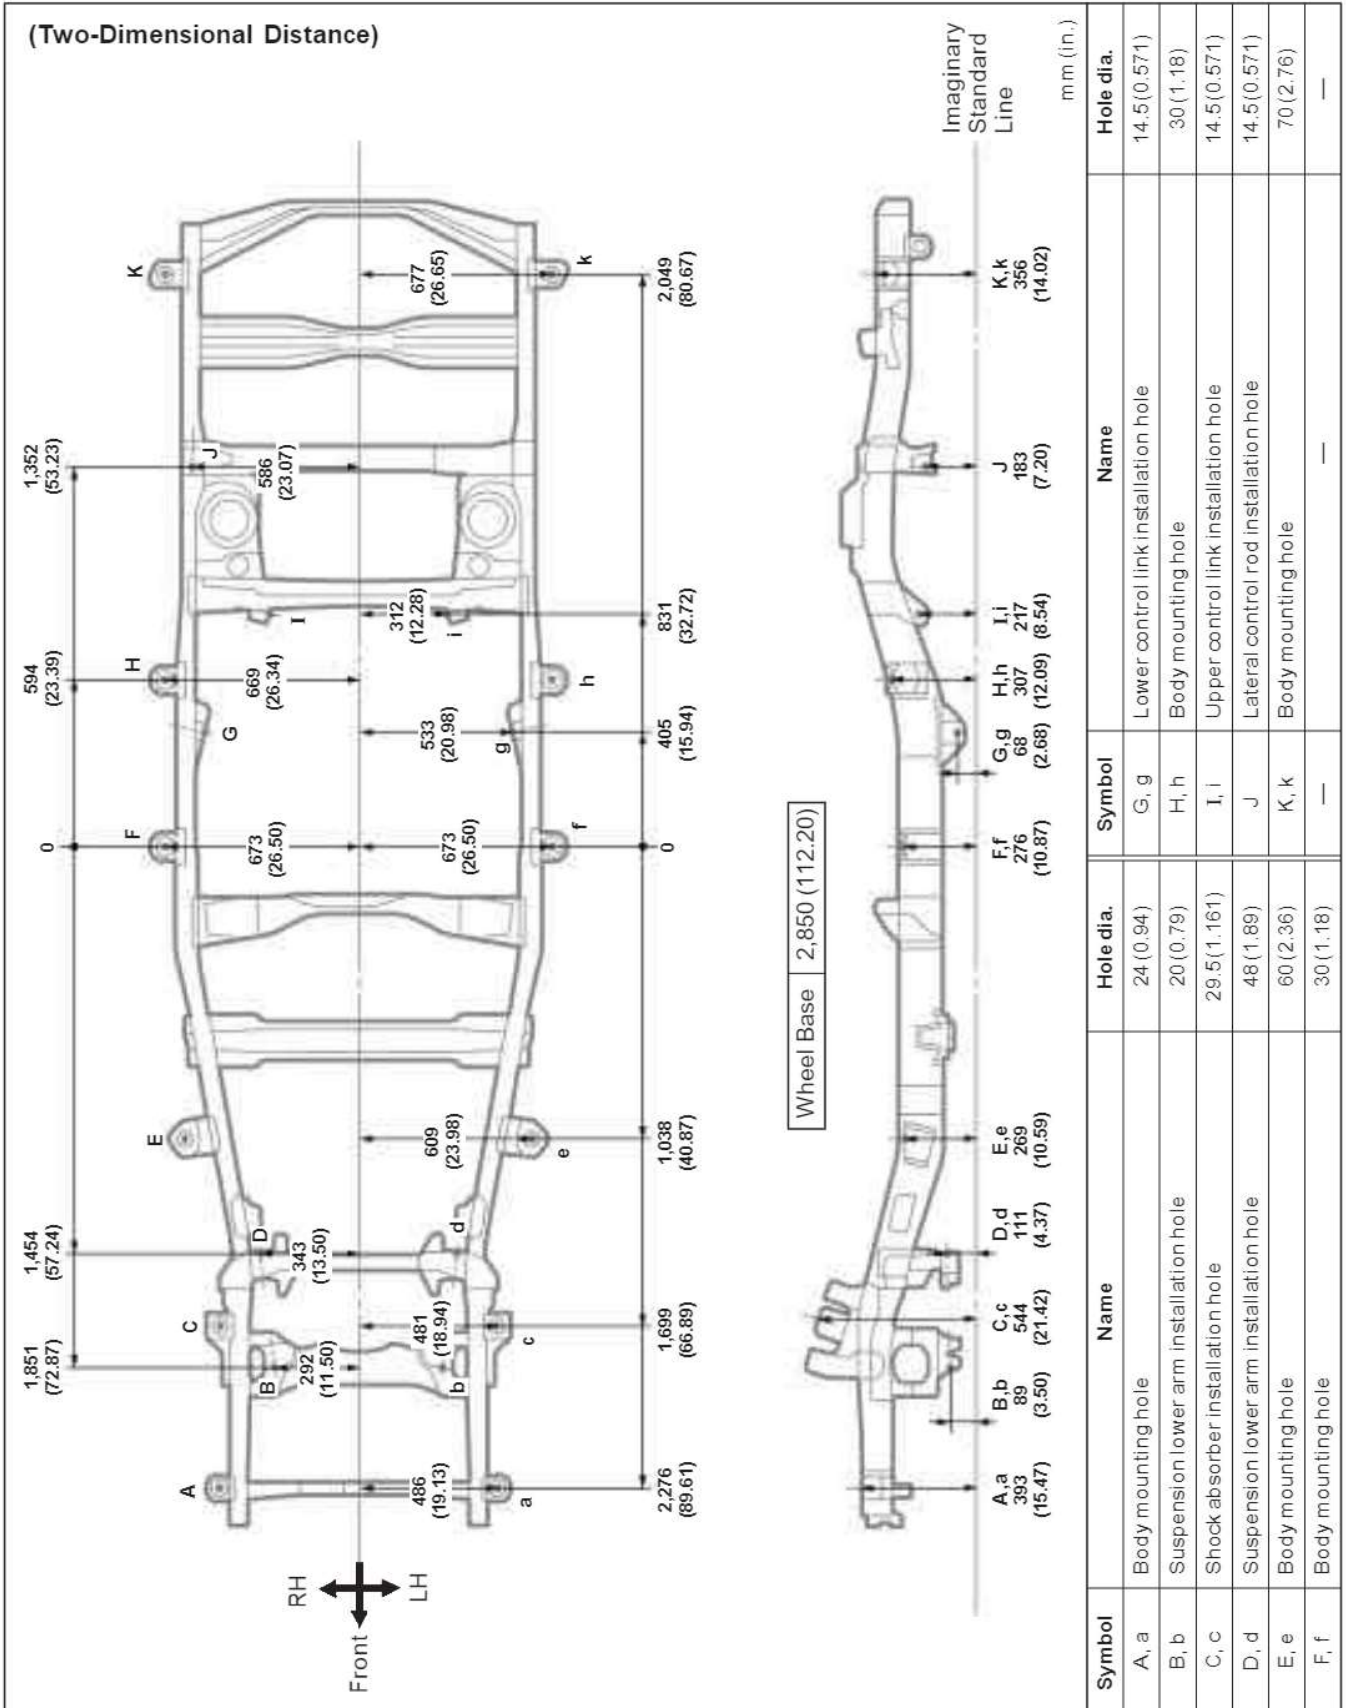

cardiagn.com

FRAME DIMENSION

FZJ105 series (RHD) · HZJ105 series (RHD)

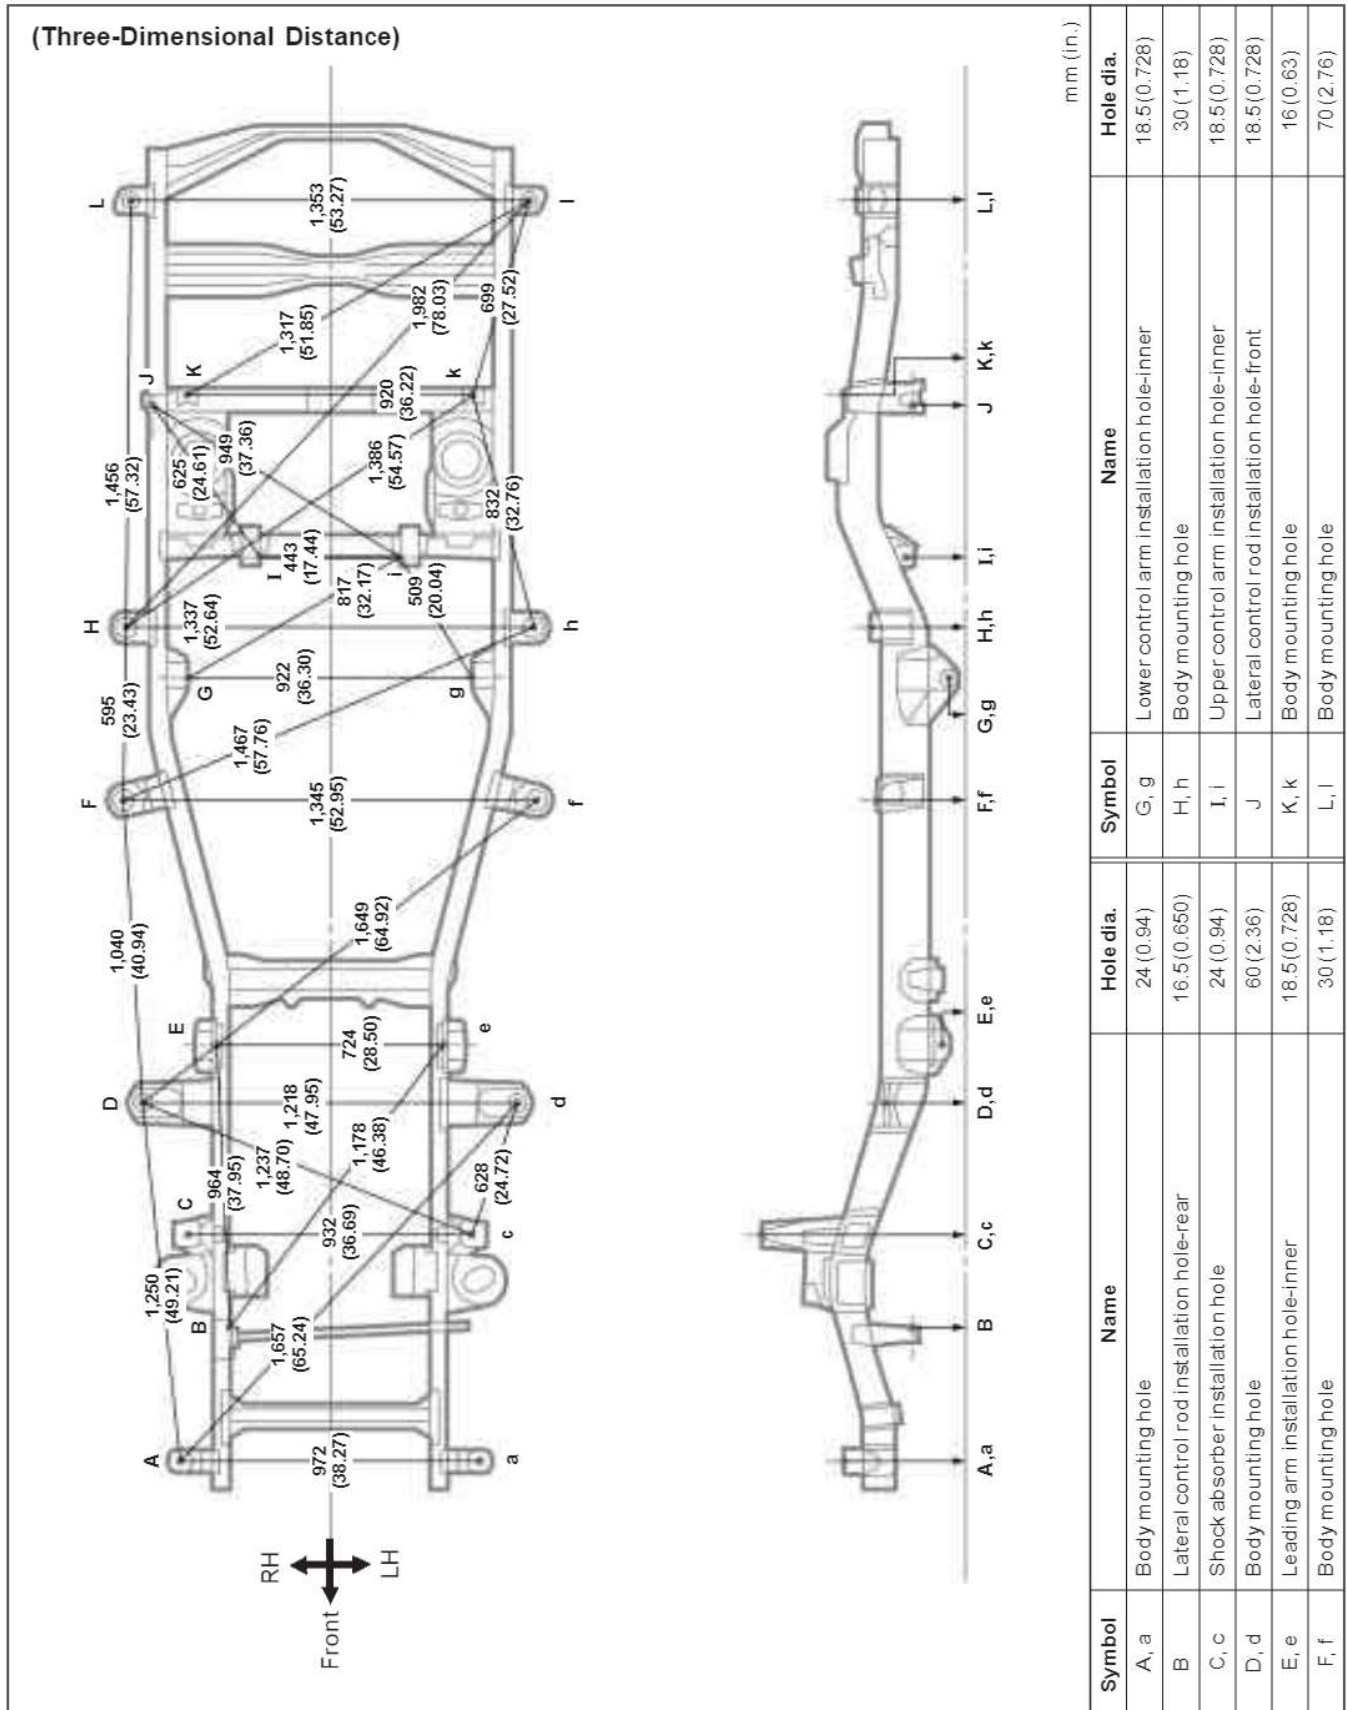


cardiagn.com

BODY DIMENSIONS – Body Dimension Drawings

DI-11

FRAME DIMENSION


FZJ105 series (RHD) · HZJ105 series (RHD) (Cont'd)

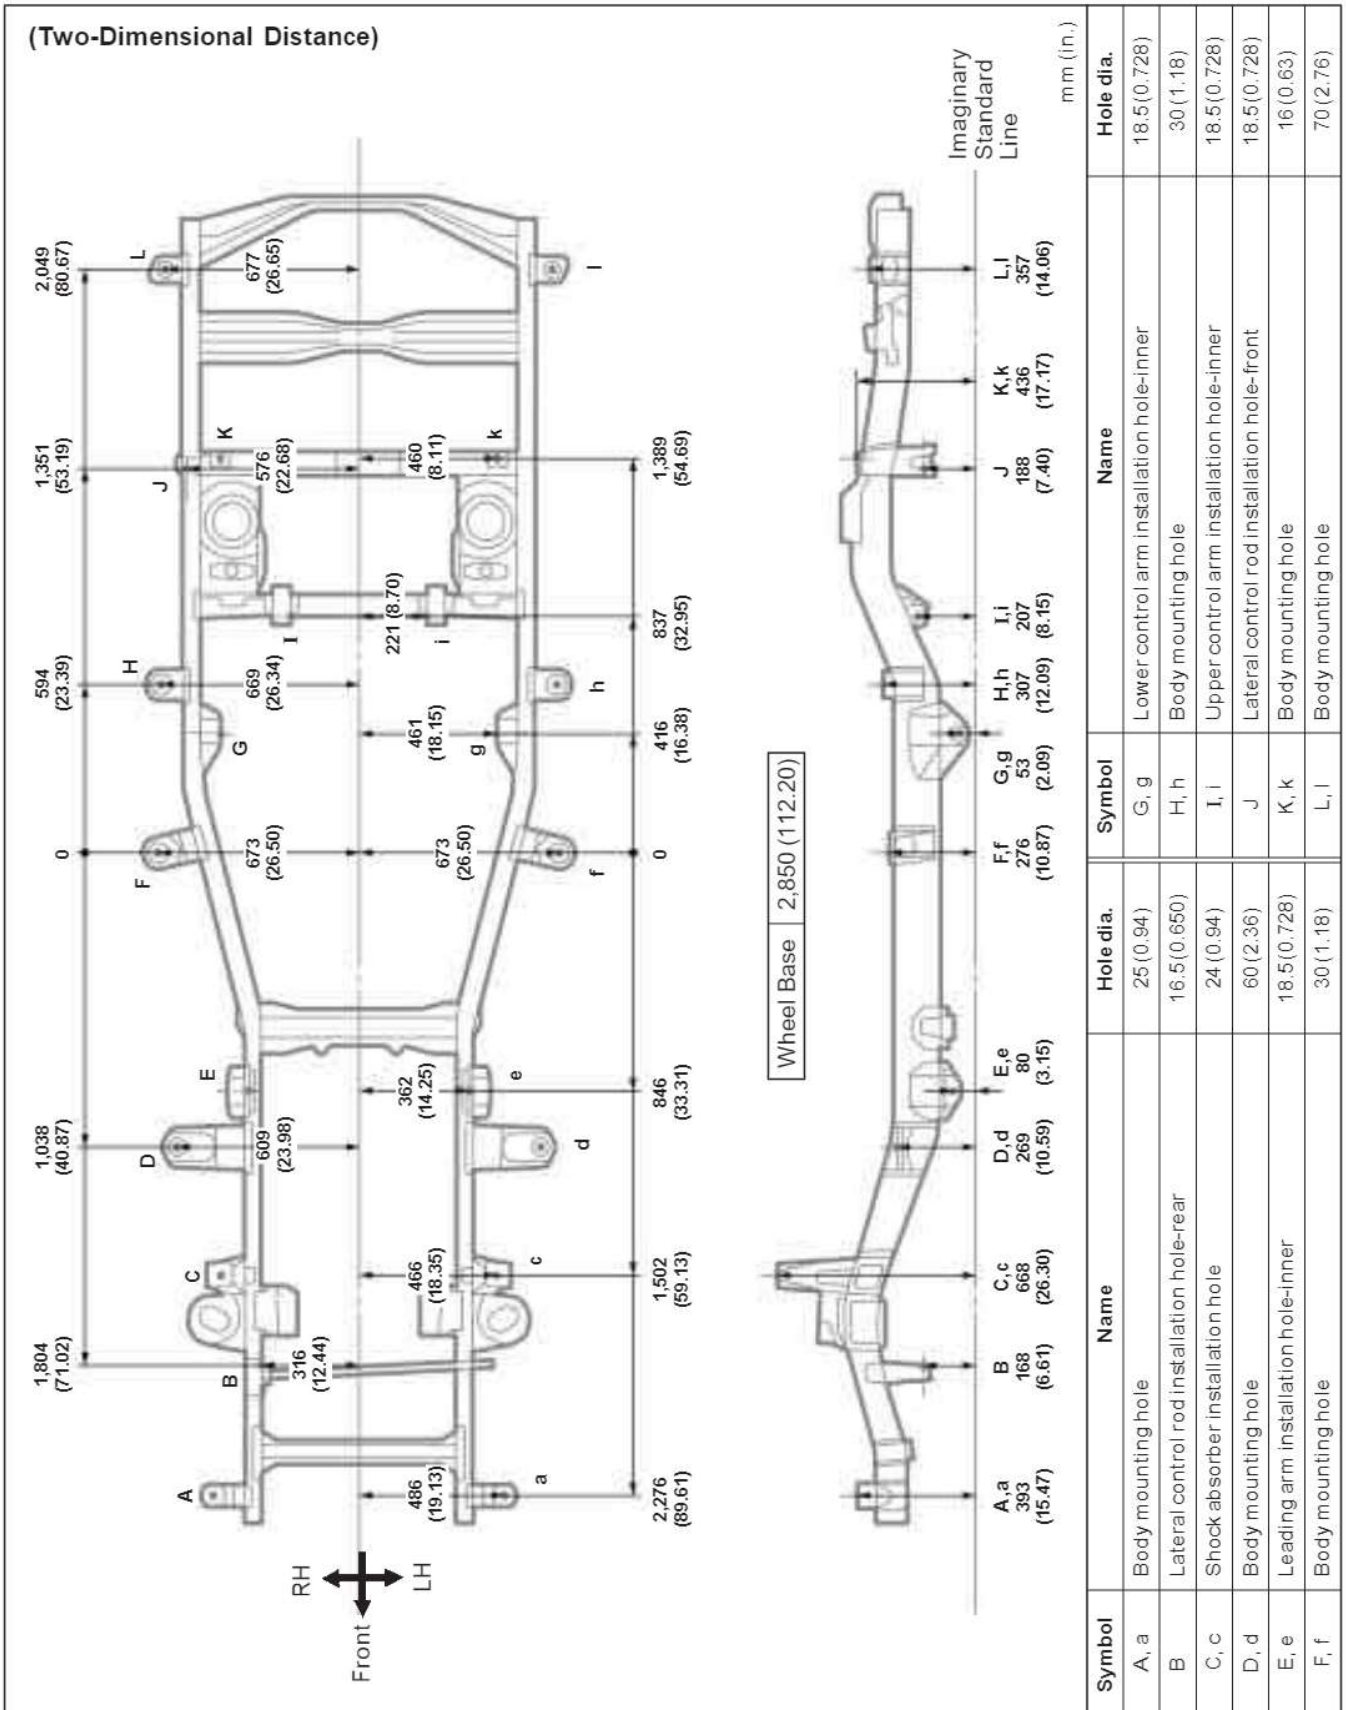

cardiagn.com

FRAME DIMENSION

FZJ105 series (LHD) · HZJ105 series (LHD)

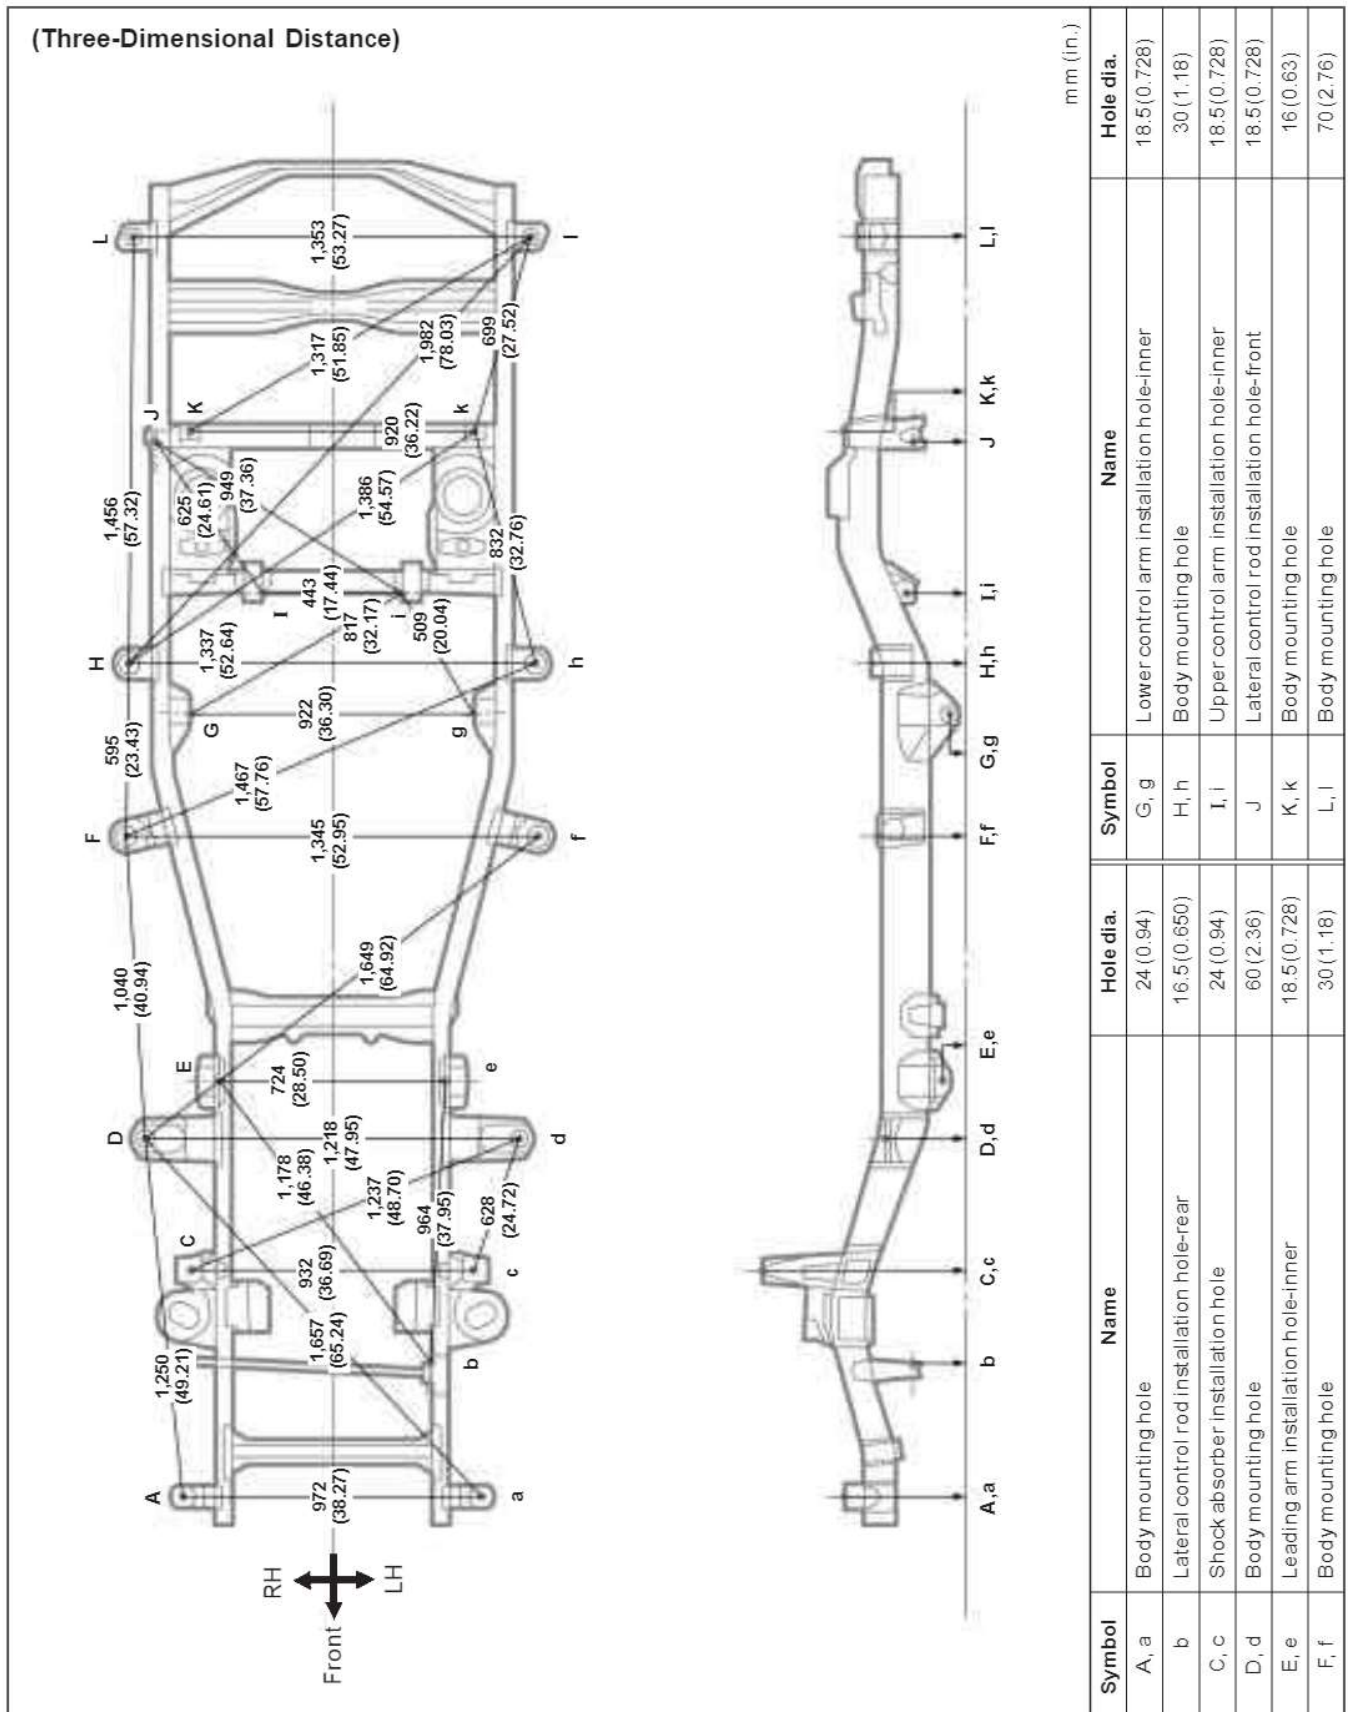


cardiagn.com

BODY DIMENSIONS – Body Dimension Drawings

DI-13

FRAME DIMENSION

FZJ105 series (LHD) · HZJ105 series (LHD) (Cont'd)


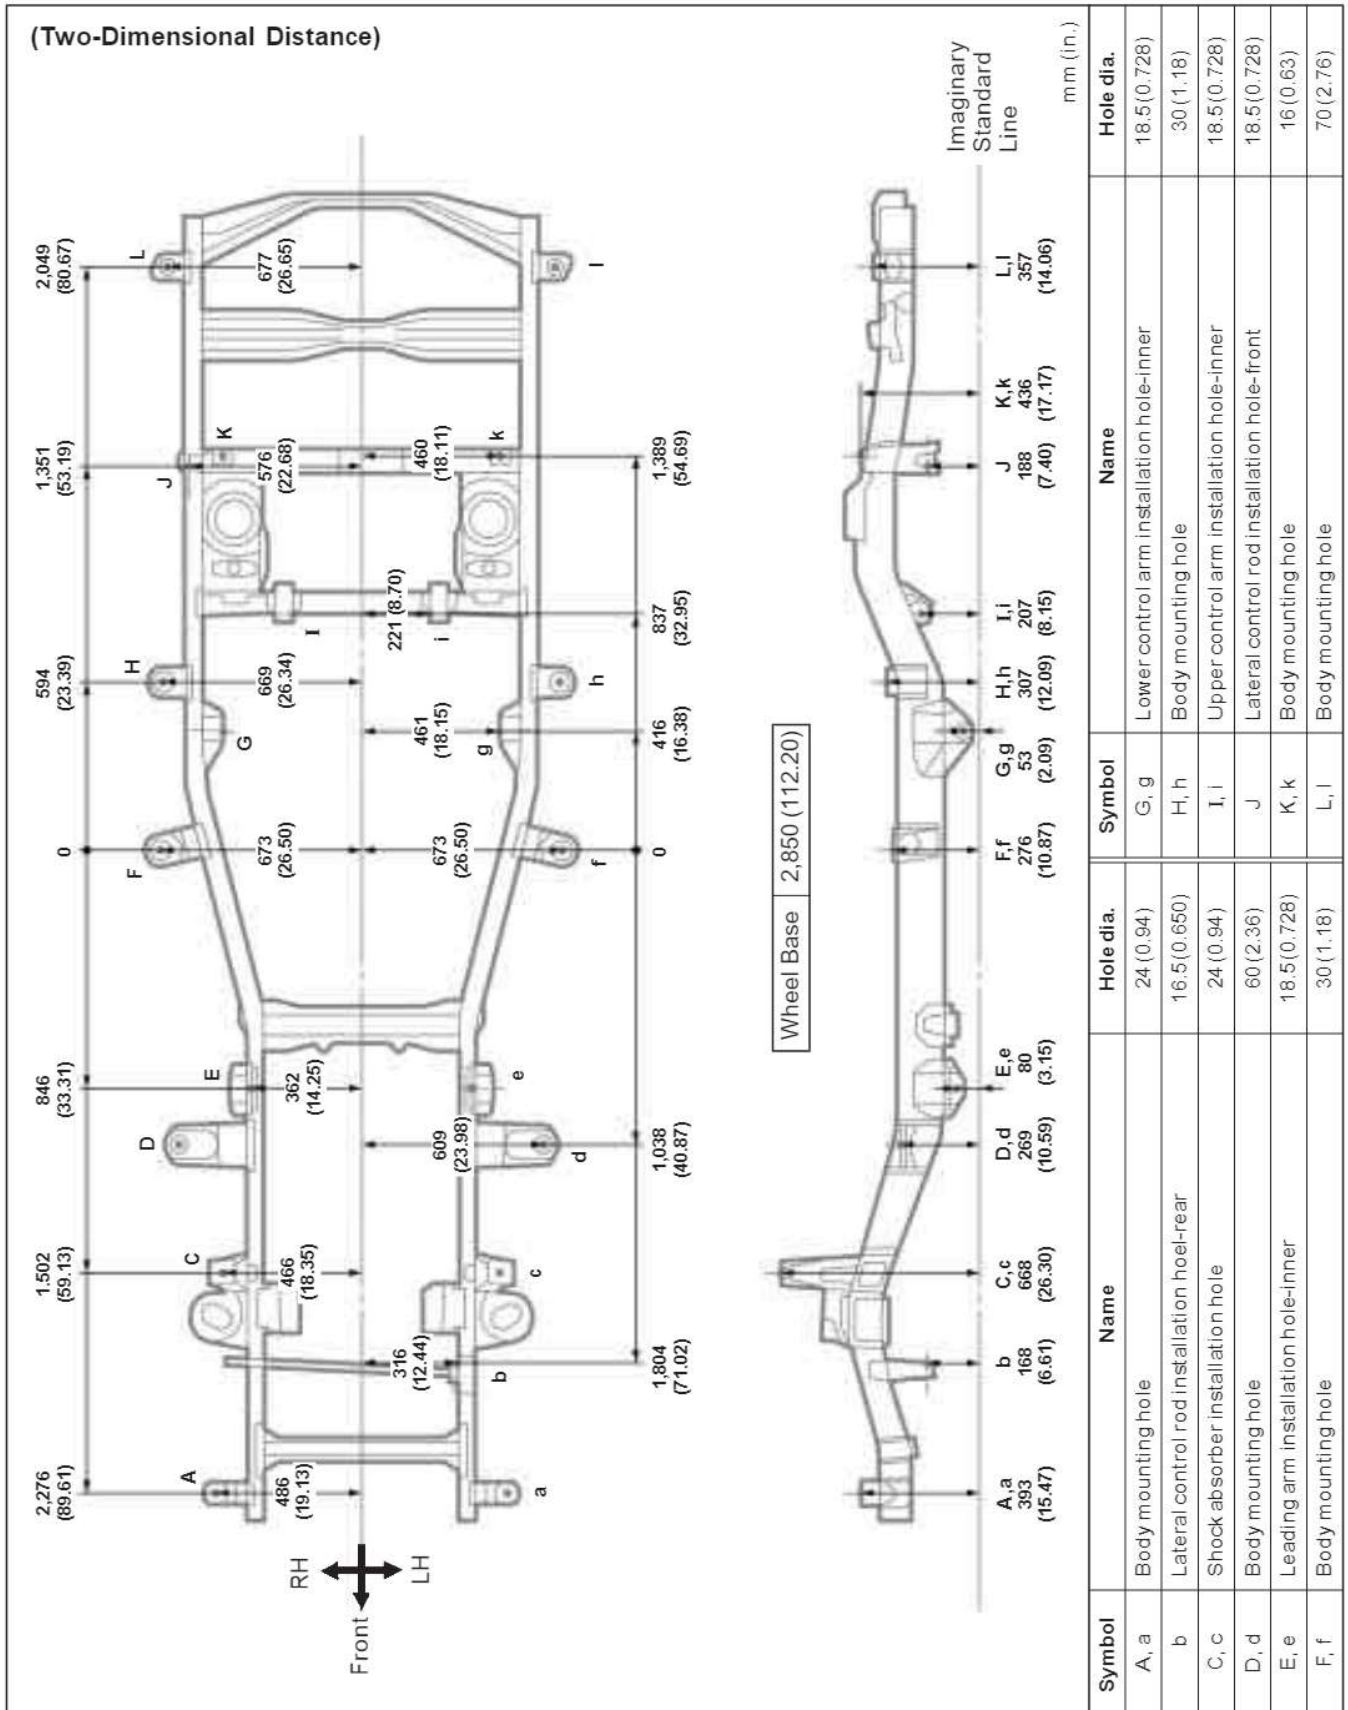


cardiagn.com

FRAME DIMENSION – Upper Face

UZJ100 series · HDJ100, 101 series · FZJ100 series

(Three-Dimensional Distance)

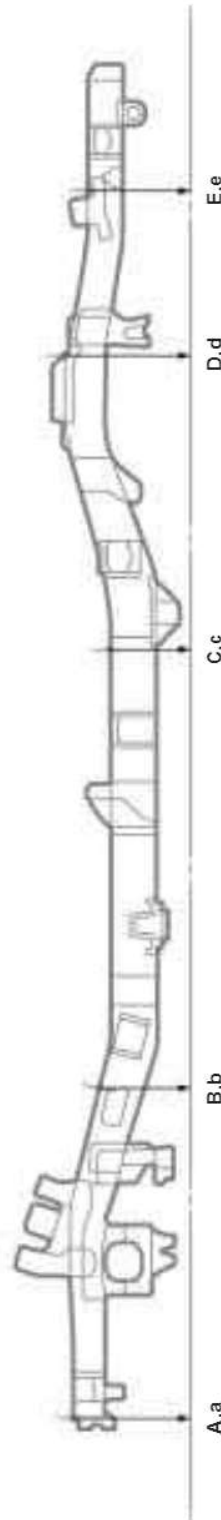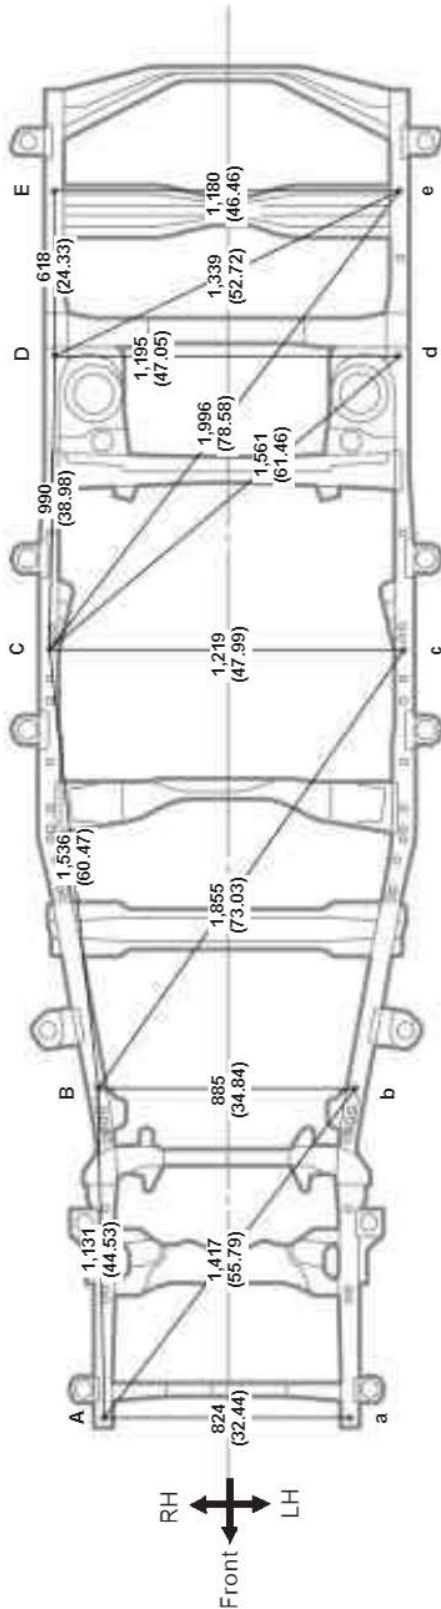

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation nut	12 (0.47) nut	D, d	Frame side rail working hole	7 (0.28)
B, b	Accumulator installation nut	8 (0.31) nut	E, e	Wireharness installation hole	12 x 7 (0.47 x 0.28)
C, c	Frame side rail standard hole	16 x 16 (0.63 x 0.63)	—	—	—


mm (in.)

cardiagn.com

BODY DIMENSIONS – Body Dimension Drawings

DI-15

FRAME DIMENSION – Upper Face
UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)

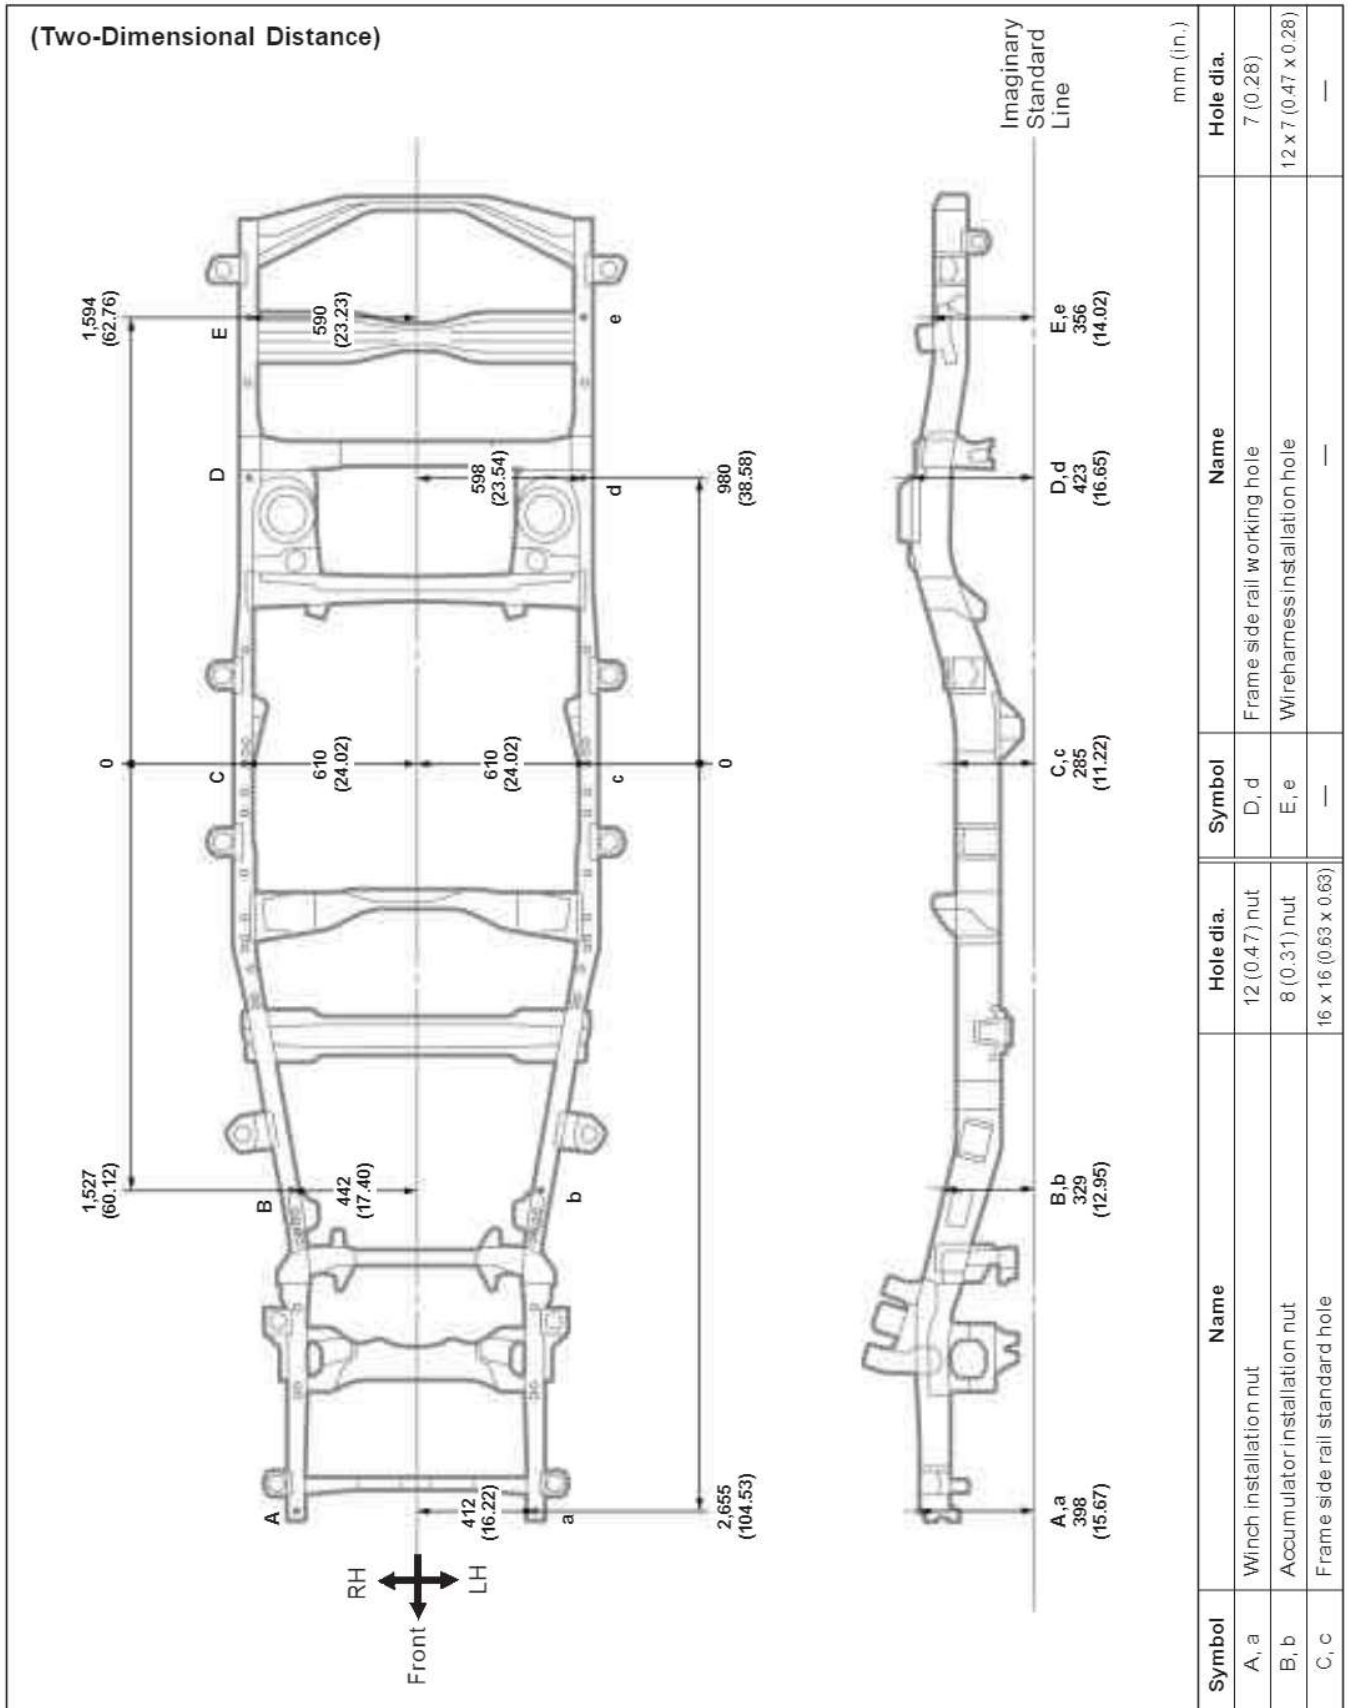


cardiagn.com

FRAME DIMENSION – Lower Face

UZJ100 series · HDJ100, 101 series · FZJ100 series

(Three-Dimensional Distance)

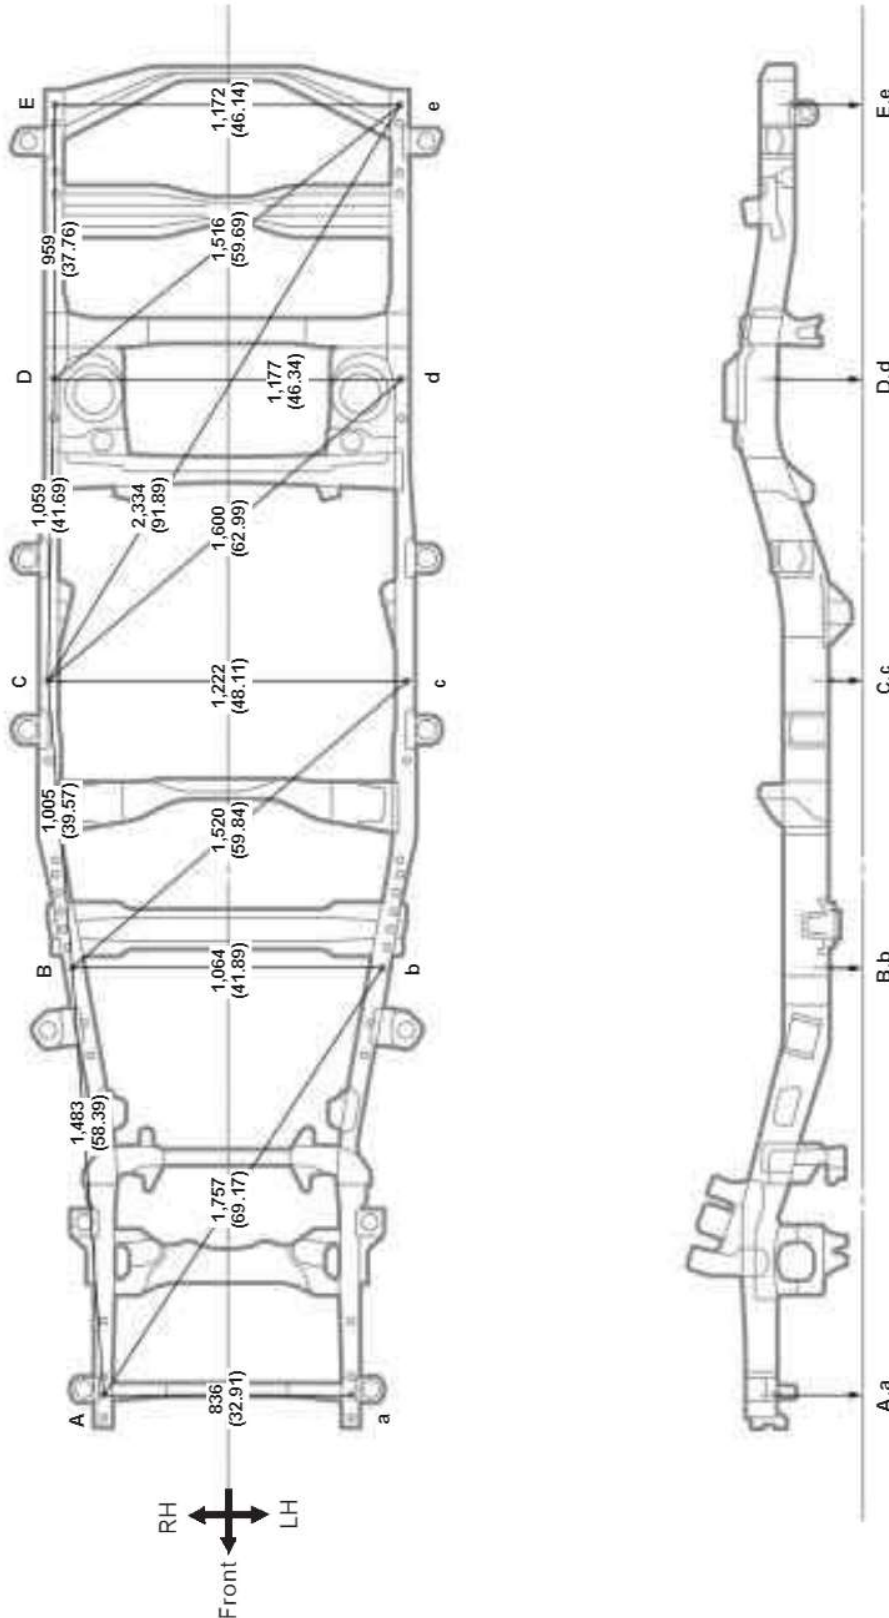


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Hook installation nut	14 (0.55) nut	D, d	Stopper rubber installation nut	8 (0.31) nut
B, b	Under cover installation nut	8 (0.31) nut	E, e	Hook installation nut	14 (0.55) nut
C, c	Frame side rail standard hole	16 x 16 (0.63 x 0.63)	—	—	—

mm (in.)

BODY DIMENSIONS – Body Dimension Drawings

DI-17


FRAME DIMENSION – Lower Face
UZJ100 series · HDJ100, 101 series · FZJ100 series
(Cont'd)

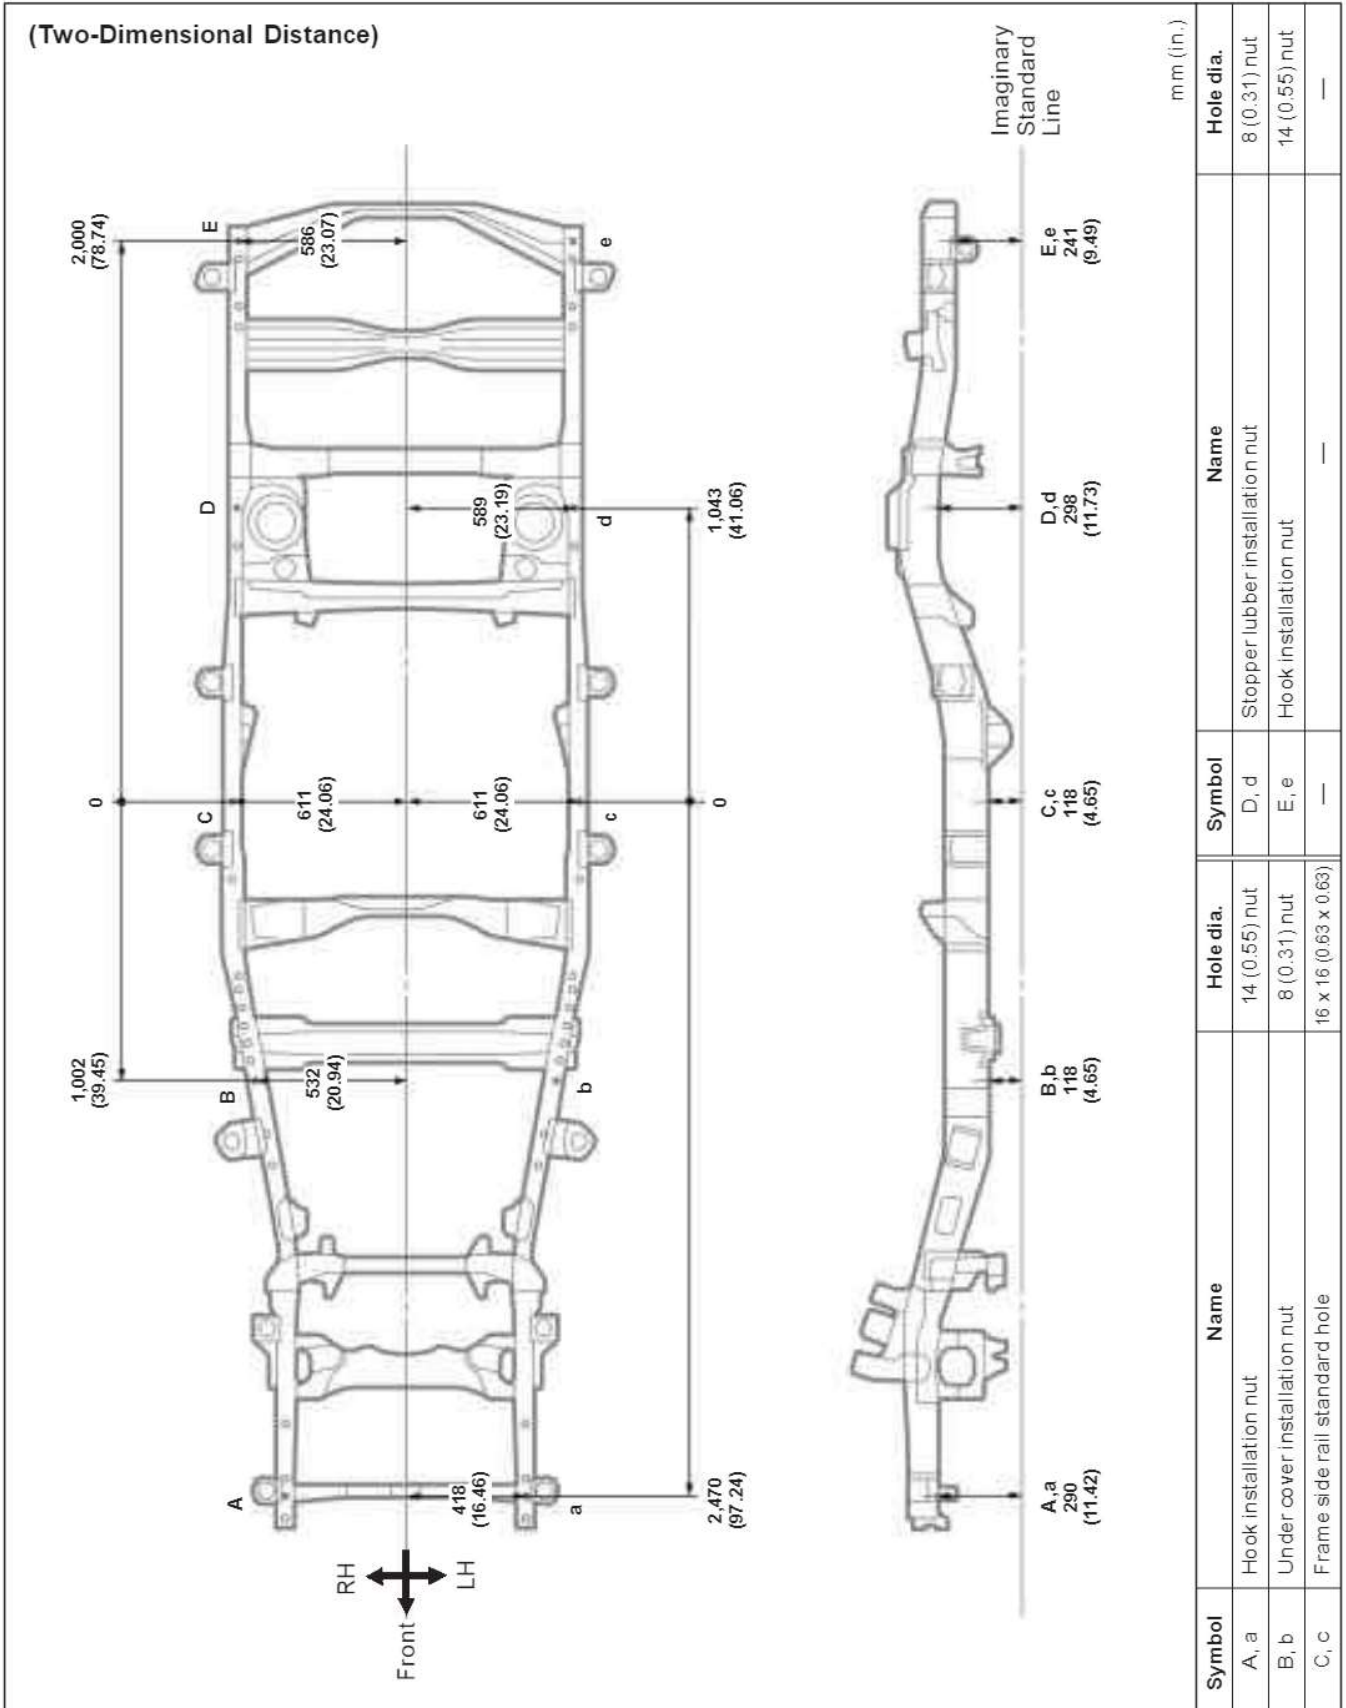

cardiagn.com

FRAME DIMENSION – Upper Face
FZJ105 series · HZJ105 series

(Three-Dimensional Distance)

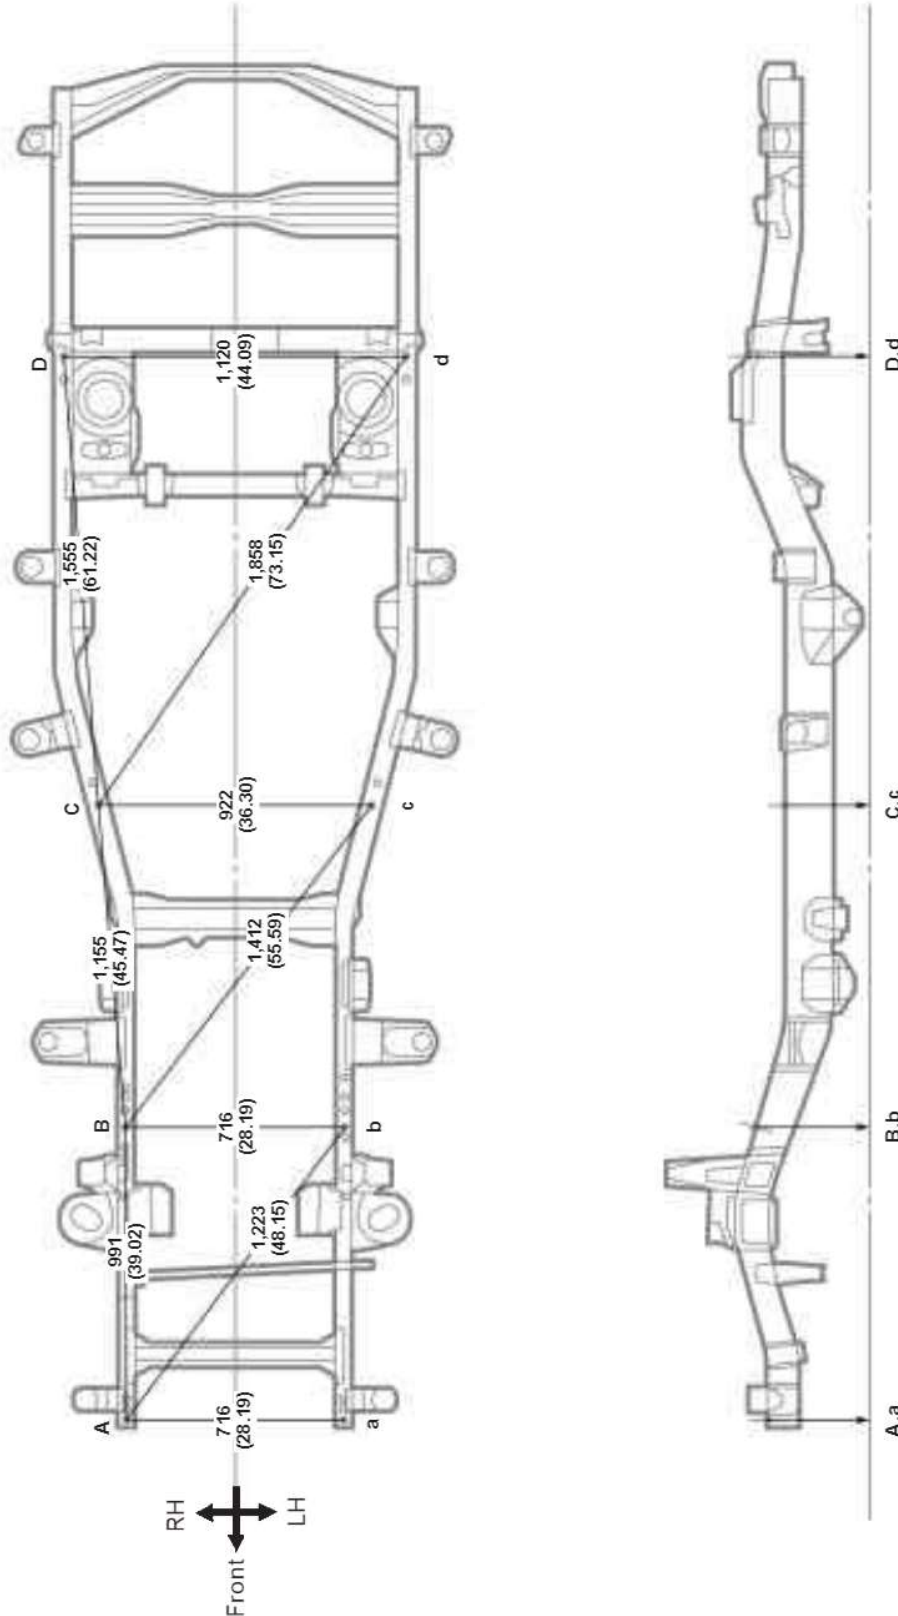


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation nut	12 (0.47) nut	C, c	Frame side rail standard hole	14 (0.55)
B, b	Insulator installation hole	10 (0.39)	D, d	Frame side rail working hole	9 (0.35)

BODY DIMENSIONS – Body Dimension Drawings

FRAME DIMENSION – Upper Face
 FZJ105 series · HZJ105 series (Cont'd)


(Two-Dimensional Distance)

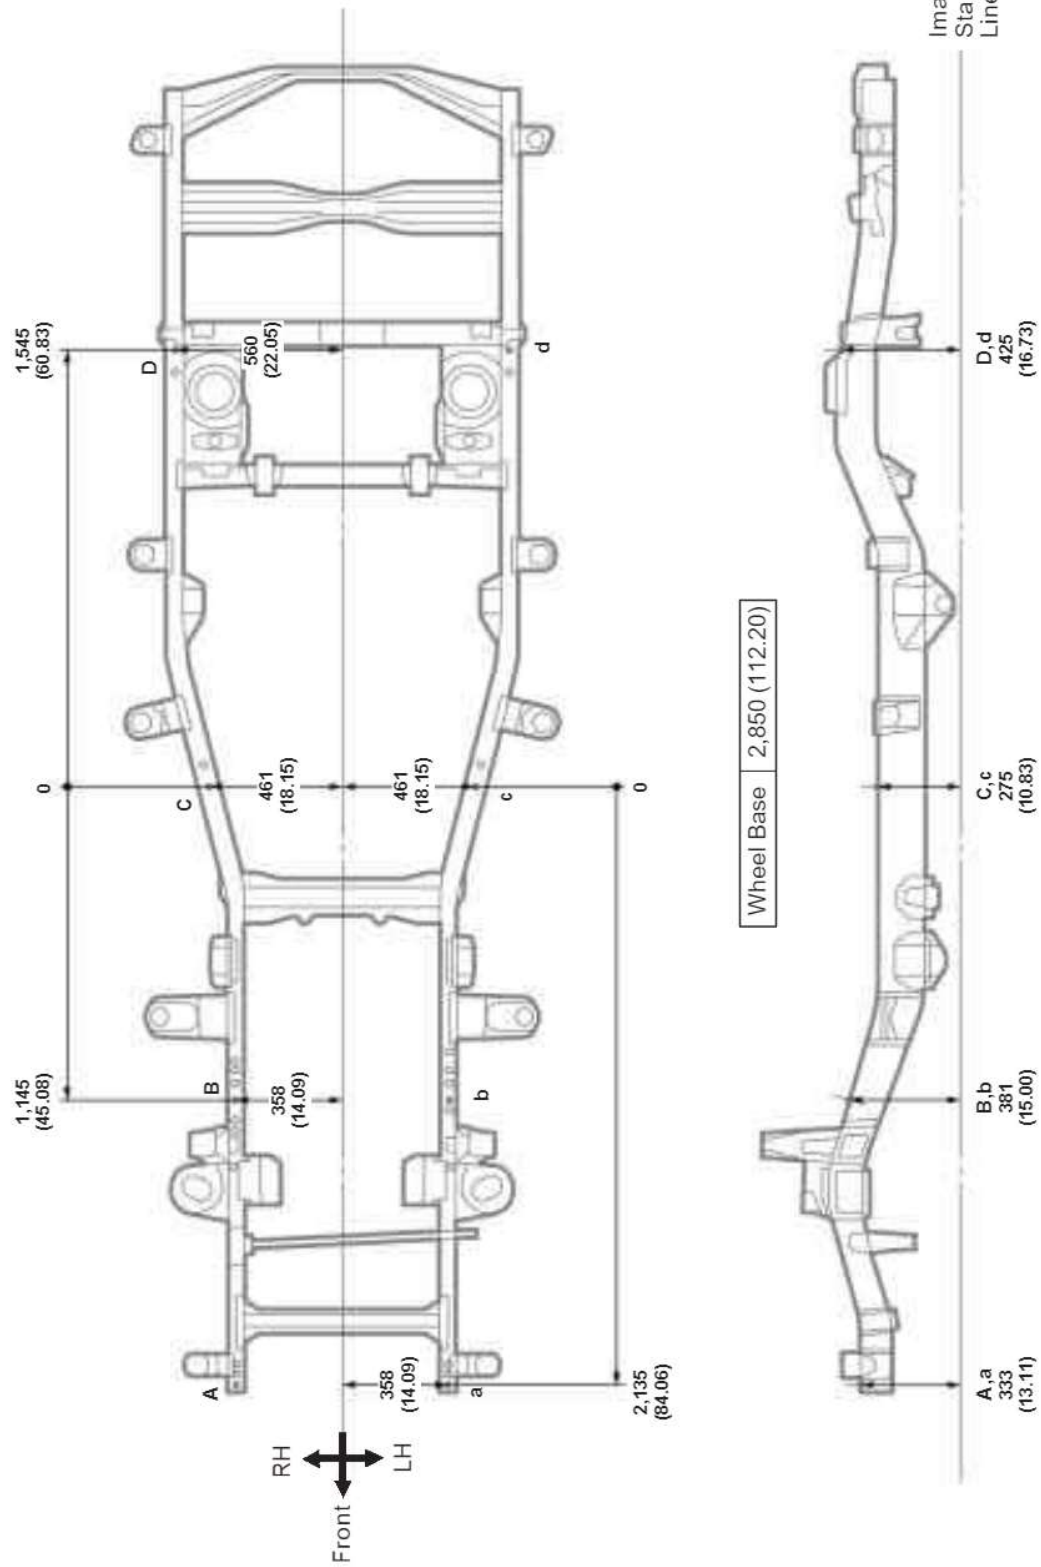

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Winch installation nut	12 (0.47) nut	C, c	Frame side rail standard hole	14 (0.55)
B, b	Insulator installation hole	10 (0.39)	D, d	Frame side rail working hole	9 (0.35)

cardiagn.com


FRAME DIMENSION – Lower Face
FZJ105 series · HZJ105 series

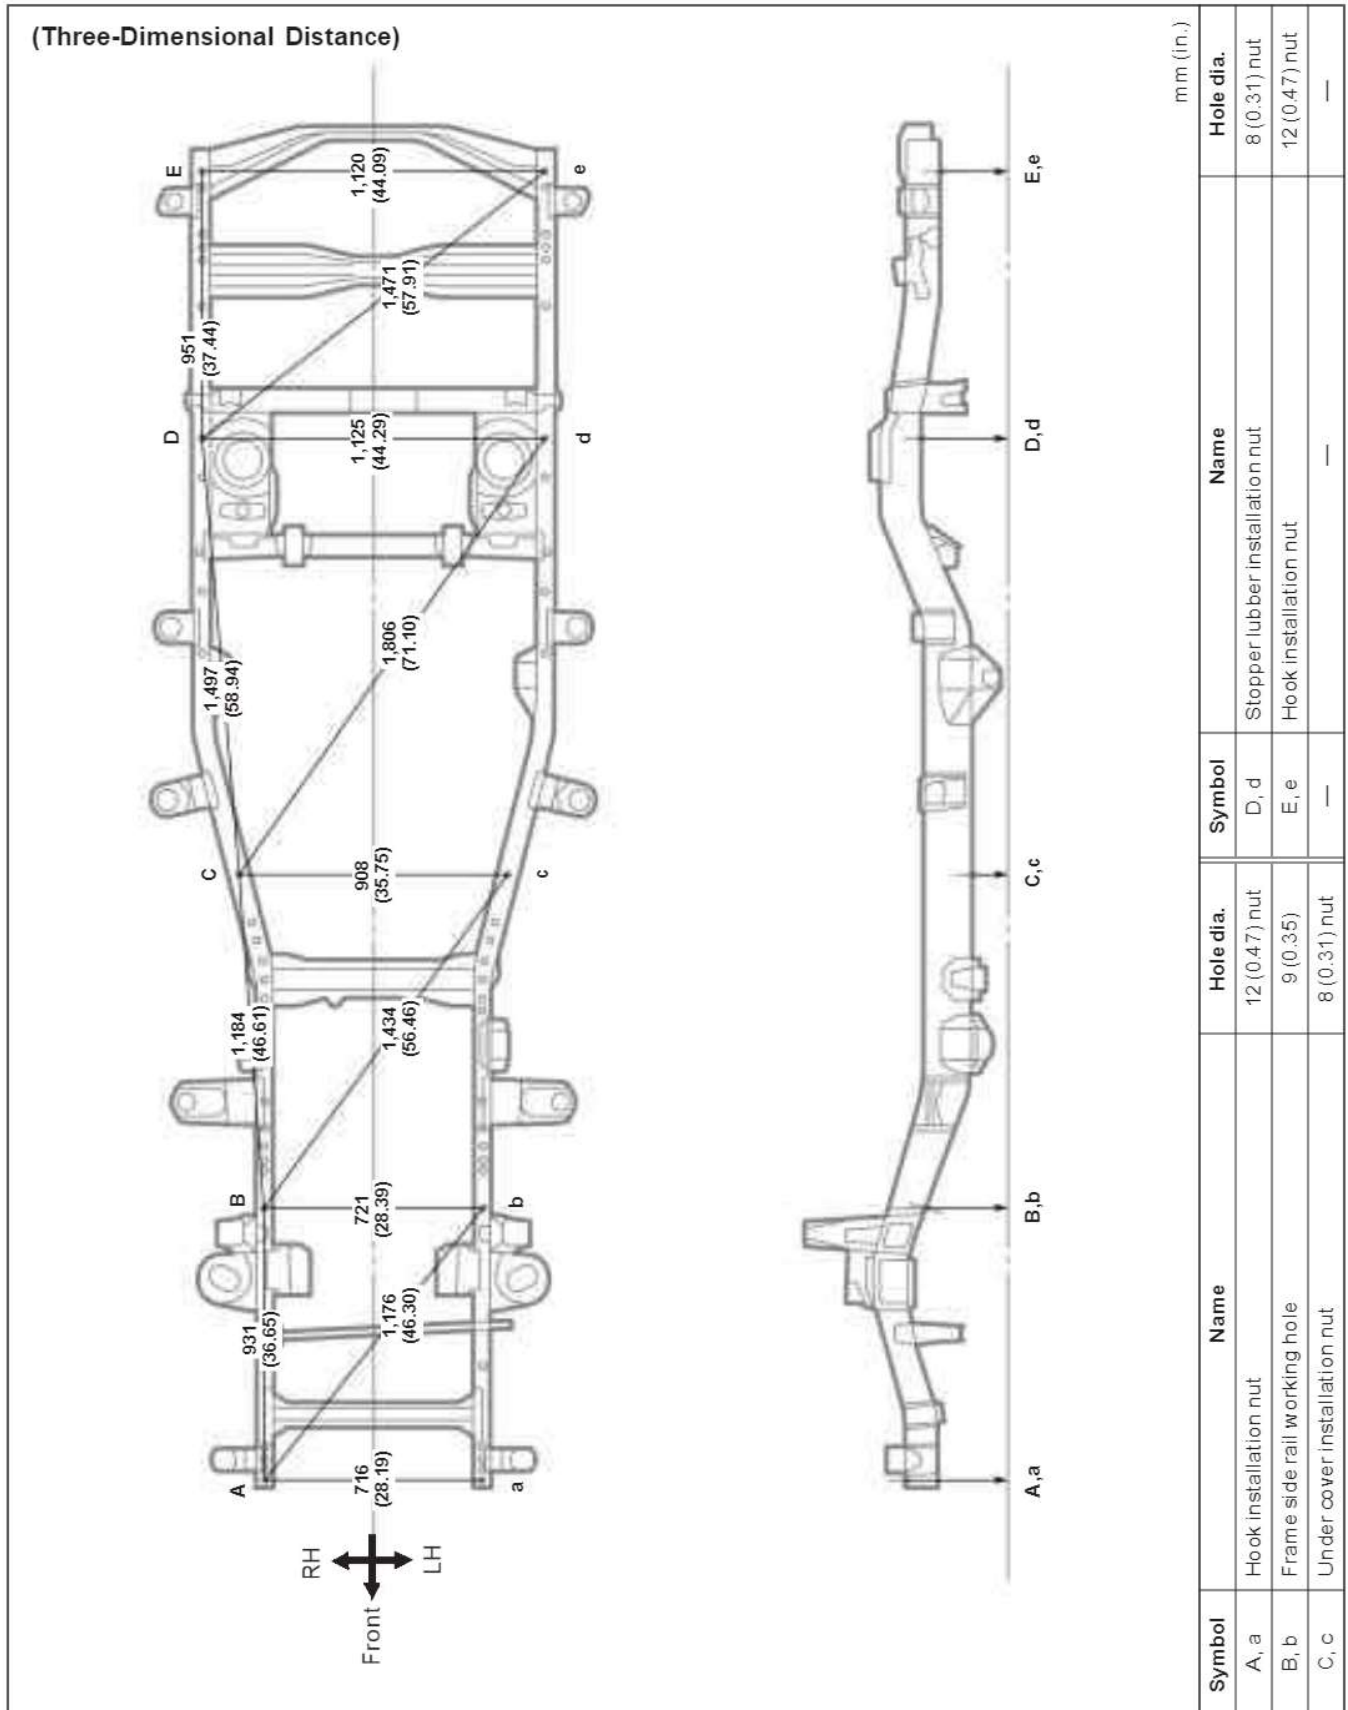

BODY DIMENSIONS – Body Dimension Drawings

FRAME DIMENSIN – Lower Face
 FZJ105 series · HZJ105 series (Cont'd)

(Two-Dimensional Distance)

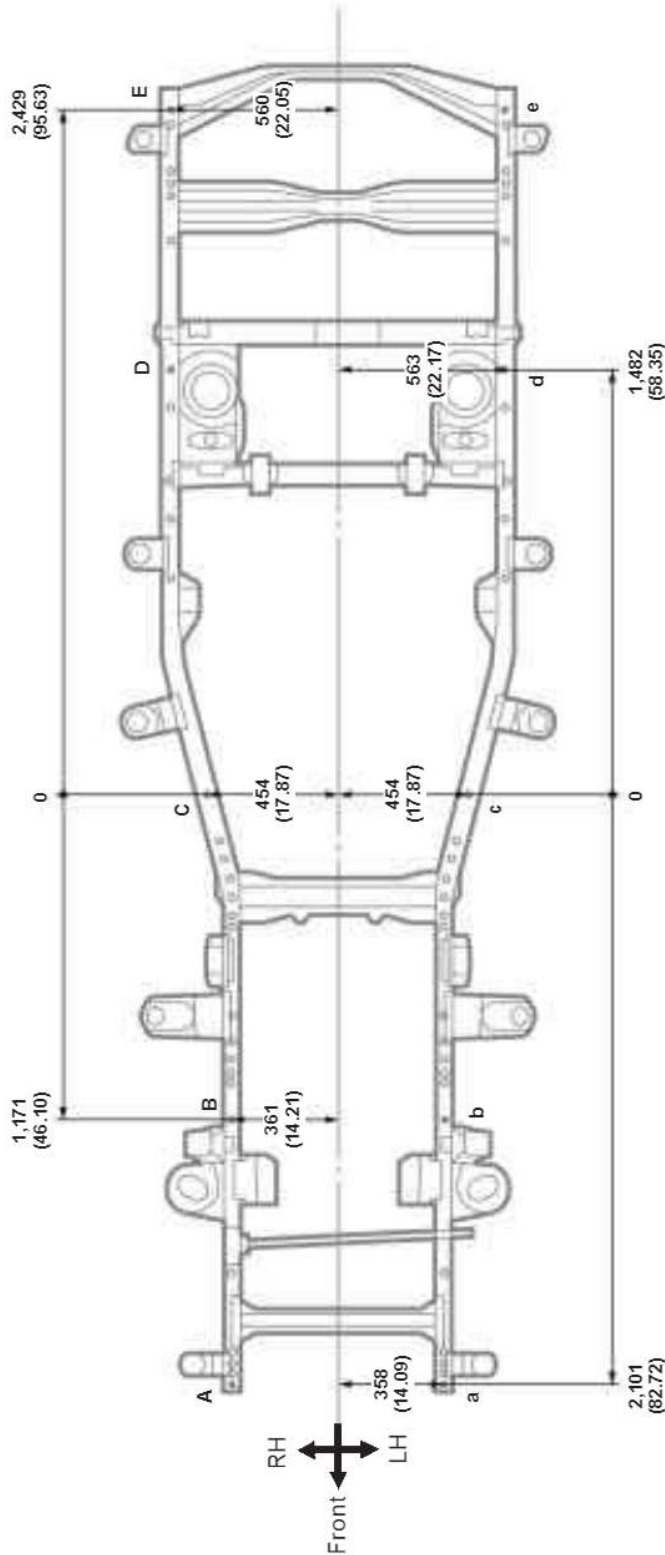

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Hook installation nut	12 (0.47) nut	D, d	Stopper lubber installation nut	8 (0.31) nut
B, b	Frame side rail working hole	9 (0.35)	E, e	Hook installation nut	12 (0.47) nut
C, c	Under cover installation nut	8 (0.31) nut	—	—	—

PP-2

PLASTIC BODY PARTS – Handling Precautions

HANDLING PRECAUTIONS

1. The repair procedure for plastic body parts must conform with the type of plastic material.
2. Plastic body parts are identified by the codes in the following chart.
3. When repairing metal body parts adjoining plastic body parts (by brazing, frame cutting, welding, painting etc.), consideration must given to the property of the plastic.

Code	Material name	Heat* resistant temperature limit °C (°F)	Resistance to alcohol or gasoline	Notes
AAS	Acrylonitrile Acrylic Styrene	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
ABS	Acrylonitrile Butadiene Styrene	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
AES	Acrylonitrile Ethylene Styrene	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
ASA	Acrylonitrile Styrene Acrylate	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
CAB	Cellulose Acetate	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
EPDM	Ethylene Propylene	100 (212)	Alcohol is harmless. Gasoline is harmless if applied only for short time in small amounts.	Most solvents are harmless but avoid dipping in gasoline, solvents, etc.
FRP	Fiber Reinforced Plastics	180 (356)	Alcohol and gasoline are harmless.	Avoid alkali.
EVA	Ethylene Acetate	70 (158)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid gasoline and organic or aromatic solvents.
PA	Polyamide (Nylon)	80 (176)	Alcohol and gasoline are harmless.	Avoid battery acid.
PBT	Polybutylene Terephthalate	160 (320)	Alcohol and gasoline are harmless.	Most solvents are harmless.
PC	Polycarbonate	120 (248)	Alcohol is harmless.	Avoid gasoline, brake fluid, wax, wax removers and organic solvents. Avoid alkali.

*Temperatures higher than those listed here may result in material deformation during repair.

PLASTIC BODY PARTS – Handling Precautions

PP-3

Code	Material name	Heat* resistant temperature limit °C (°F)	Resistance to alcohol or gasoline	Notes
PE	Polyethylene	80 (176)	Alcohol and gasoline are harmless.	Most solvents are harmless.
PET	Polyethylene Terephthalate	75 (167)	Alcohol and gasoline are harmless.	Avoid dipping in water.
PMMA	Polymethyl Methacrylate	80 (176)	Alcohol is harmless if applied only for short time in small amounts.	Avoid dipping or immersing in alcohol, gasoline, solvents, etc.
POM	Polyoxymethylene (Polyacetal)	100 (212)	Alcohol and gasoline are harmless.	Most solvents are harmless.
PP	Polypropylene	80 (176)	Alcohol and gasoline are harmless.	Most solvents are harmless.
PPO	Modified Polyphenylene Oxide	100 (212)	Alcohol is harmless.	Gasoline is harmless if applied only for quick wiping to remove grease.
PS	Polystyrene	60 (140)	Alcohol and gasoline are harmless if applied only for short time in small amounts.	Avoid dipping or immersing in alcohol, gasoline, solvents, etc.
PUR	Polyurethane	80 (176)	Alcohol is harmless if applied only for very short time in small amounts (e.g., quick wiping to remove grease).	Avoid dipping or immersing in alcohol, gasoline, solvents, etc.
PVC	Polyvinylchloride (Vinyl)	80 (176)	Alcohol and gasoline are harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid dipping or immersing in alcohol, gasoline, solvents, etc.
SAN	Styrene Acrylonitrile	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid dipping or immersing in alcohol, gasoline, solvents etc.
TPO	Thermoplastic Olefine	80 (176)	Alcohol is harmless. Gasoline is harmless if applied only for short time in small amounts.	Most solvents are harmless but avoid dipping in gasoline, solvents, etc.
TPU	Thermoplastic Polyurethane	80 (176)	Alcohol is harmless if applied only for short time in small amounts (e.g., quick wiping to remove grease).	Avoid dipping or immersing in alcohol, gasoline, solvents, etc.
TSOP	TOYOTA Super Olefine Polymer	80 (176)	Alcohol and gasoline are harmless.	Most solvents are harmless.
UP	Unsaturated Polyester	110 (233)	Alcohol and gasoline are harmless.	Avoid alkali.

*Temperatures higher than those listed here may result in material deformation during repair.

PP-4

PLASTIC BODY PARTS – Location of Plastic Body Parts

LOCATION OF PLASTIC BODY PARTS

Parts Name	Code
Radiator Grille	ABS
Front Bumper Cover	TSOP
Fog Light	PC/PP
Front Turn Signal Light	PMMA/PC/AAS
Side Turn Signal Light	SAN/AAS
Cowl Top Ventilator Louver	TSOP
Outer Rear View Mirror	ABS
Outside Moulding (Fender, Front & Rear Door, Quarter)	TSOP
Outside Handle (Front & Rear Door)	PC
Rocker Panel Moulding	TSOP
Side Door Step Plate Cover (Front, Rear)	PP
Quarter Ventilator Louver	PPO/PA
Rear Combination Light	PMMA/PP/AAS
Rear Light	PMMA/PP
Back Door Outside Moulding	TSOP
License Plate Light	PC
License Plate Light Cover	AAS
Back Door Outside Handle	POM
Rear Bumper Cover	TSOP
Reflex Reflector	PMMA/ABS
Rear Fog Light	PC/PP
Outer Under Rear View Mirror	PC/PBT
Roof Moulding	PVC

HINT:





- Resin material differs with model.
- / Made up of 2 or more kinds of materials.

RE-2

BODY PANEL REPLACEMENT

RADIATOR UPPER SUPPORT (ASSY)

REMOVAL

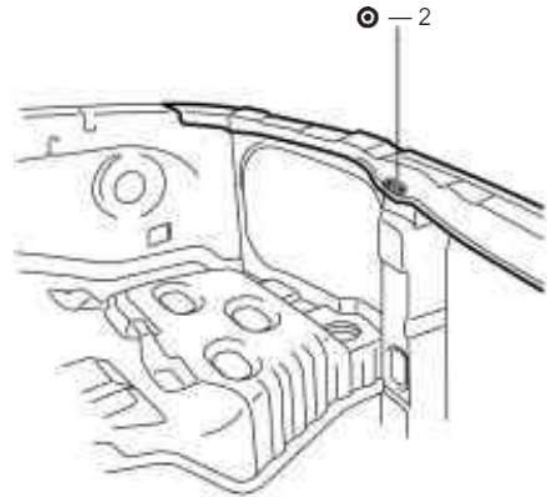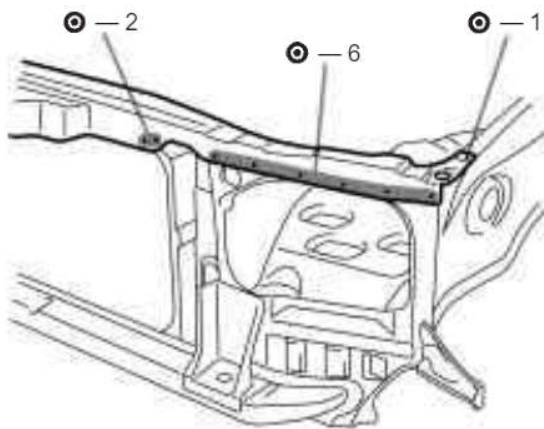
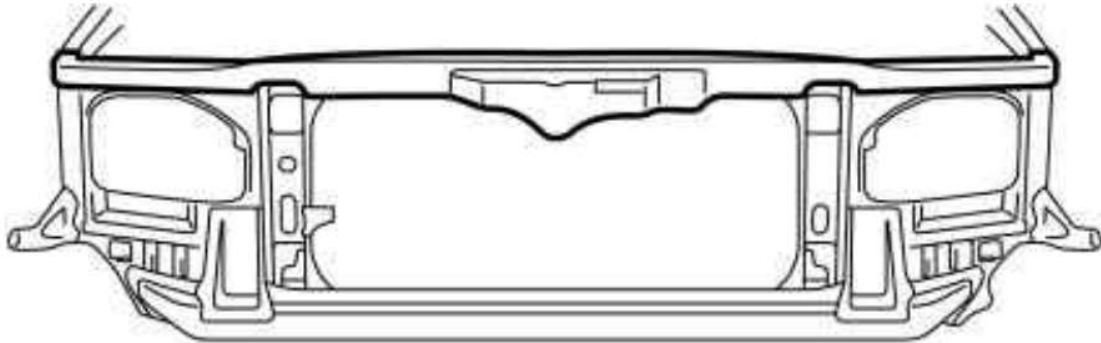
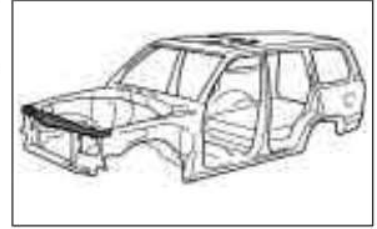


cardiagn.com

BODY PANEL REPLACEMENT

RE-3

INSTALLATION

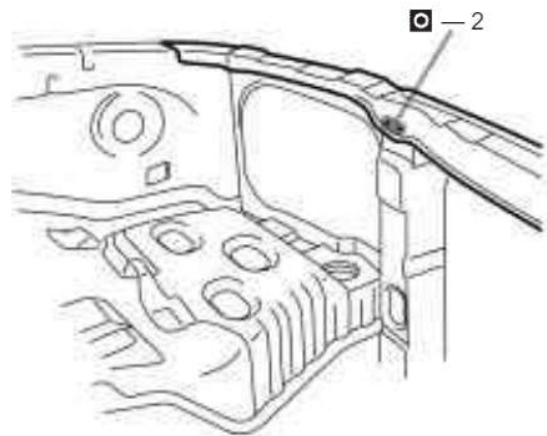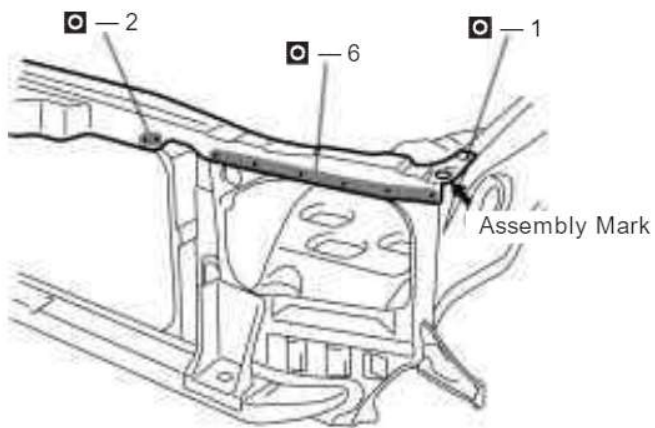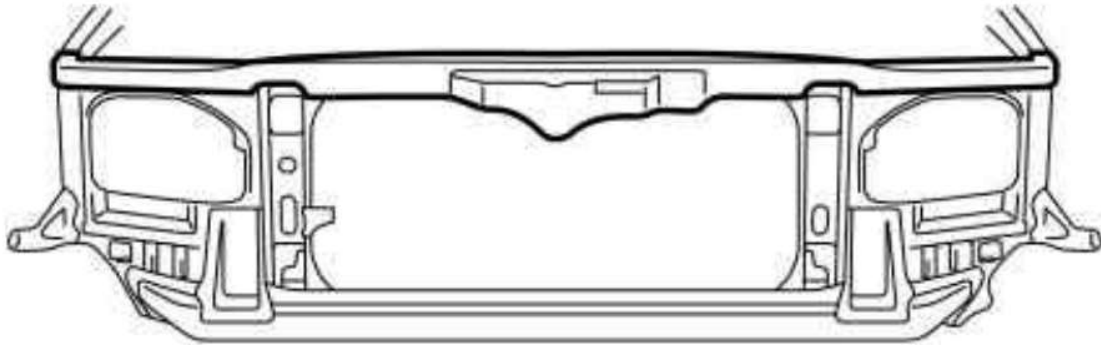


1. When temporarily installing the new parts, determine the installation position by the assembly mark. Then, measure each part in accordance with the body dimension diagram.

HINT: First install the hood lock support brace.



RE-4

BODY PANEL REPLACEMENT

RADIATOR SIDE SUPPORT (ASSY)

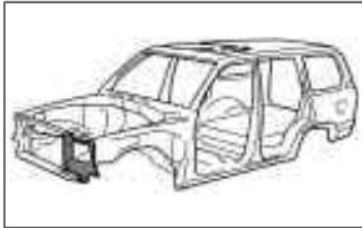

REMOVAL (With the radiator upper support removed.)

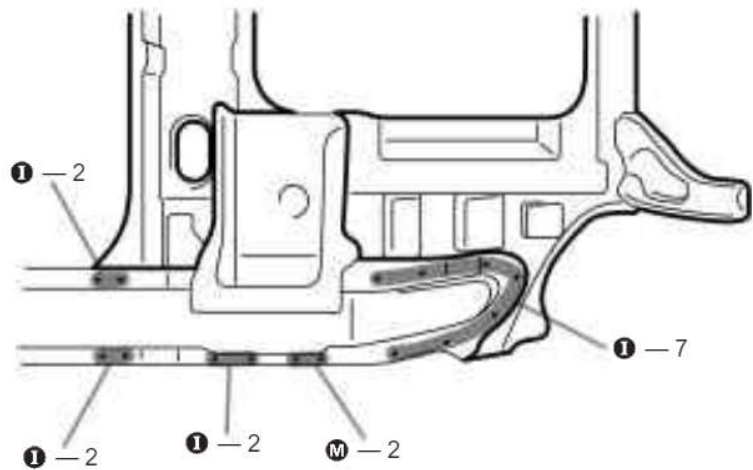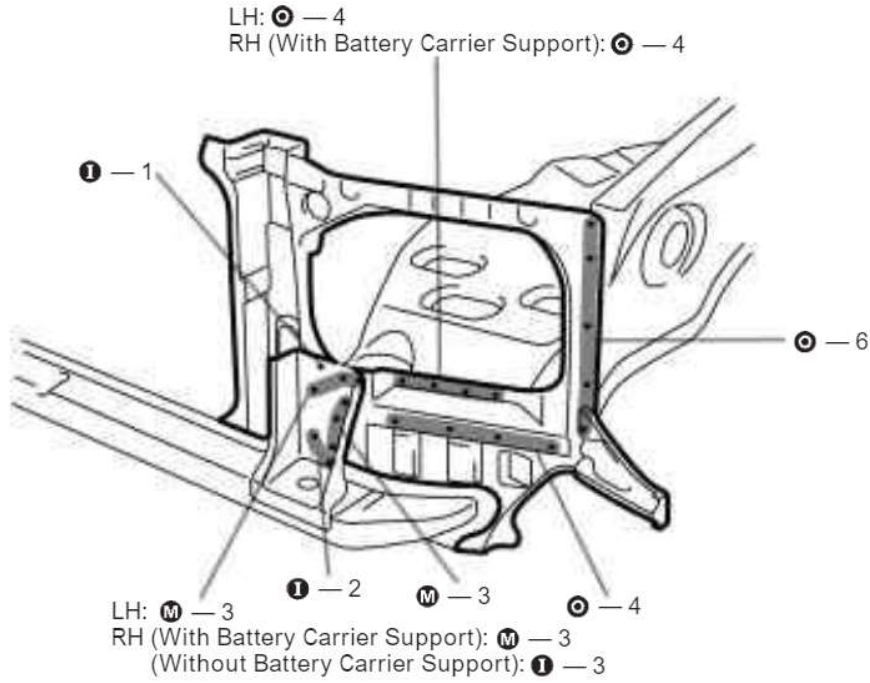


cardiagn.com

BODY PANEL REPLACEMENT

RE-5

INSTALLATION

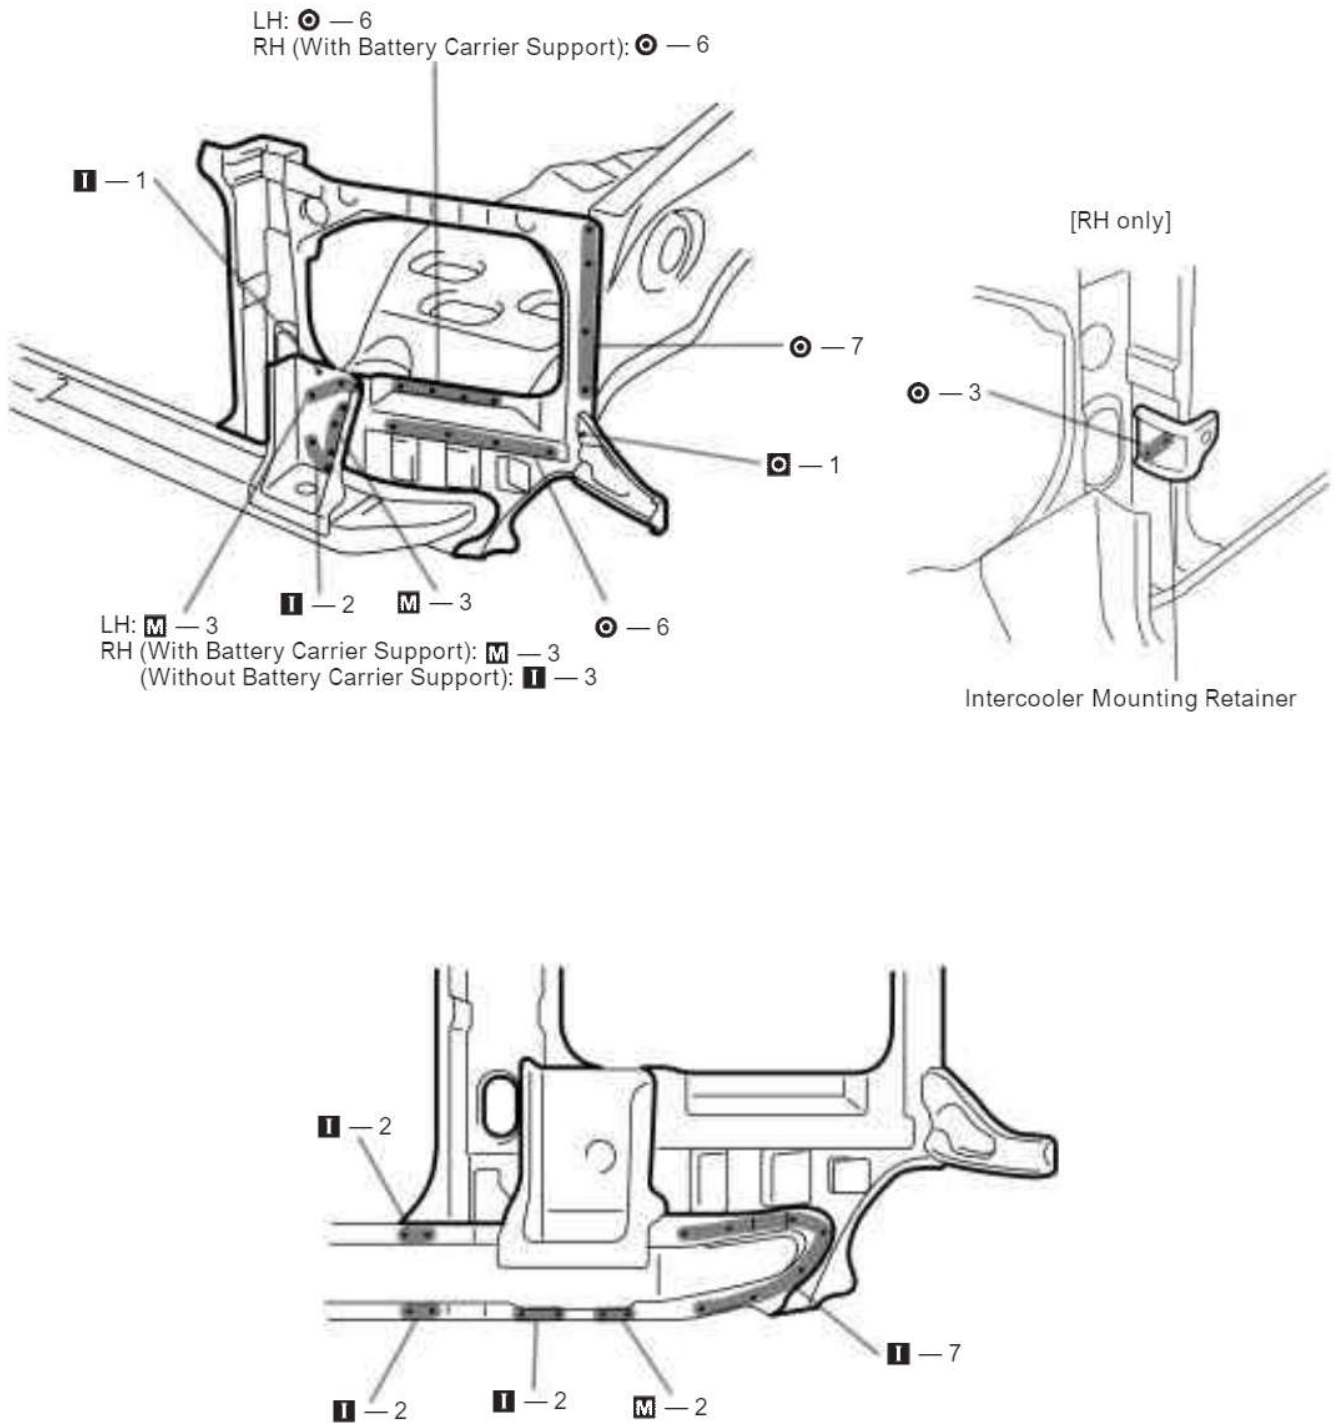

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.




HINT: First install the radiator upper support.

RE-6

BODY PANEL REPLACEMENT

FRONT CROSSMEMBER (ASSY)

REMOVAL

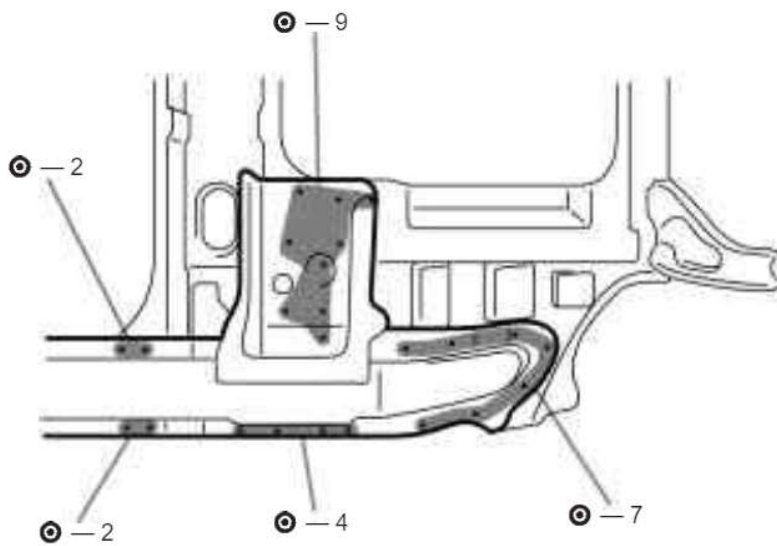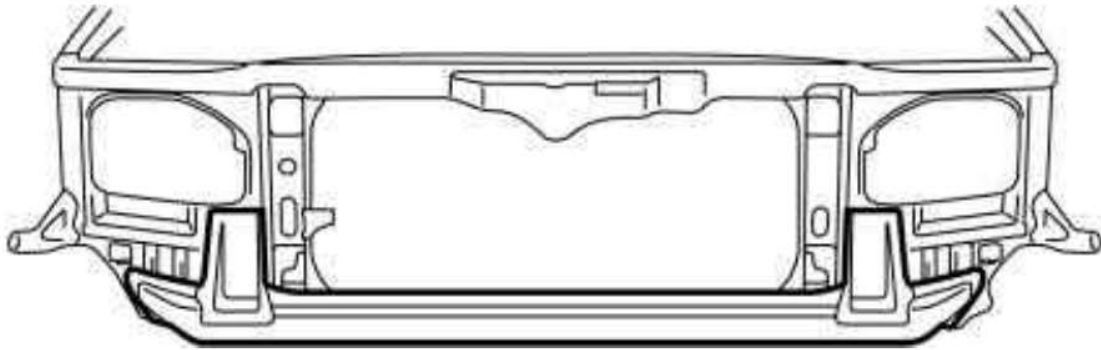
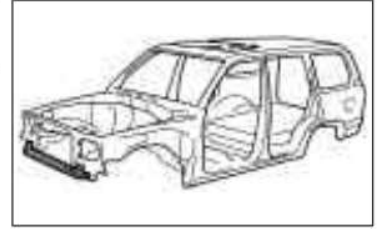


cardiagn.com

BODY PANEL REPLACEMENT

RE-7

INSTALLATION

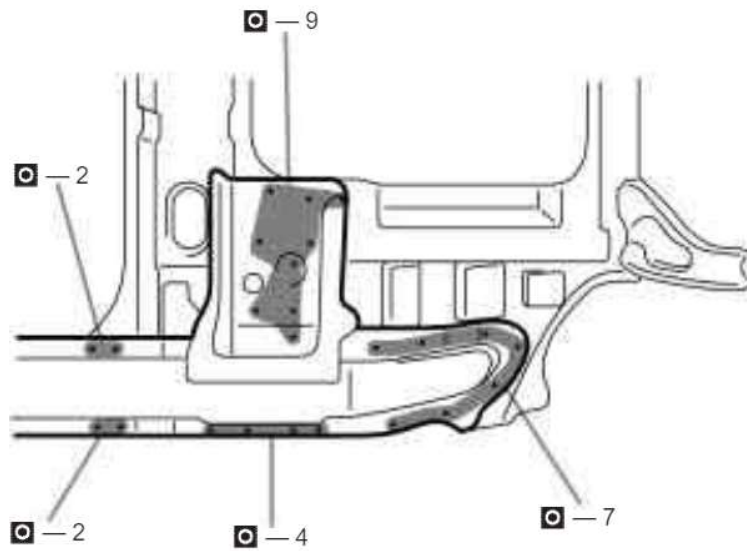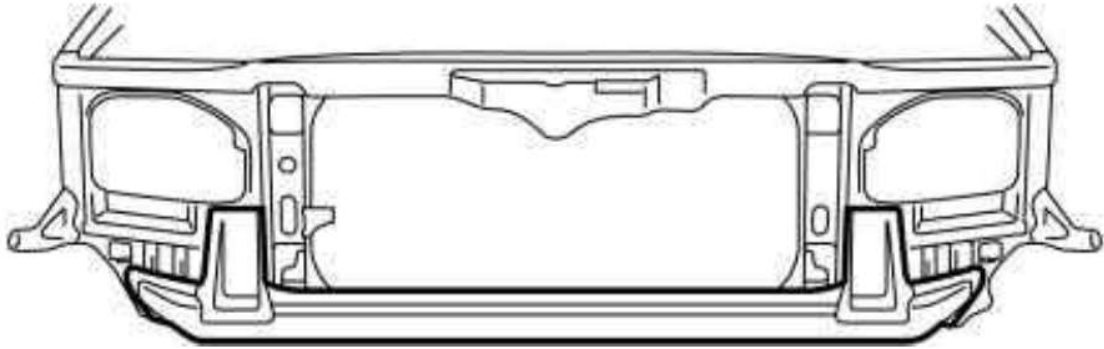





1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

RE-8

BODY PANEL REPLACEMENT

RADIATOR SUPPORT (ASSY)

REMOVAL

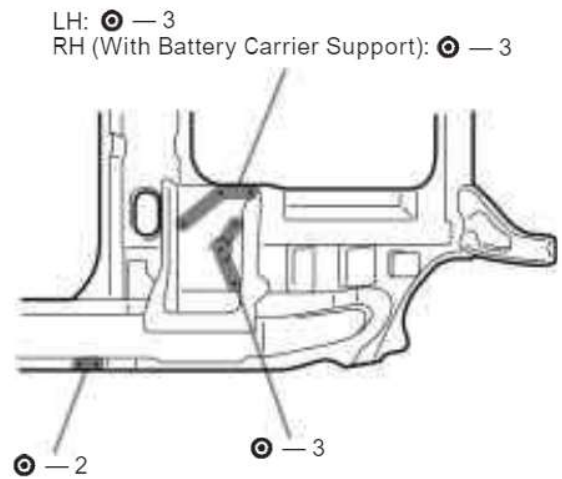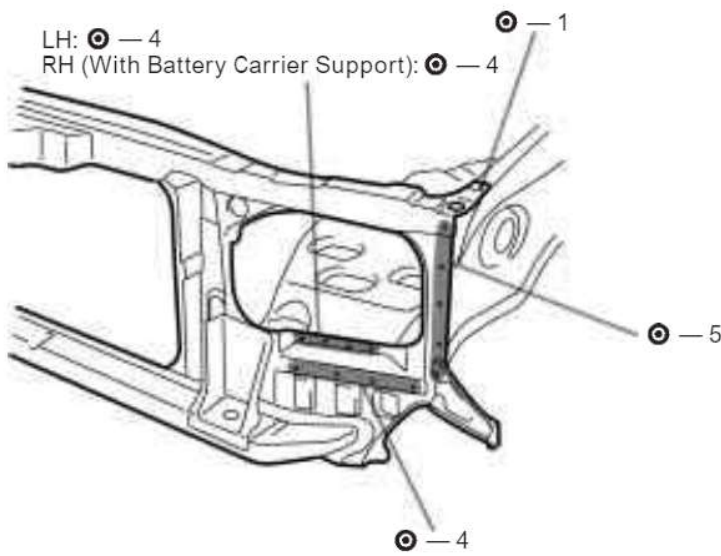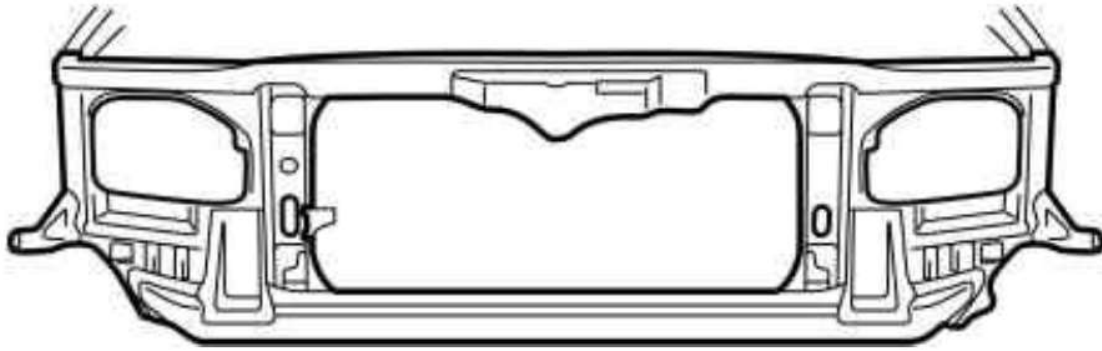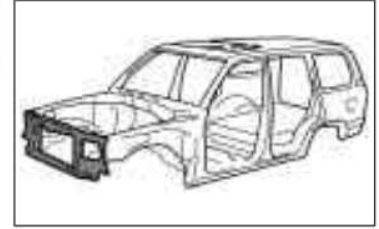


cardiagn.com

BODY PANEL REPLACEMENT

RE-9

INSTALLATION

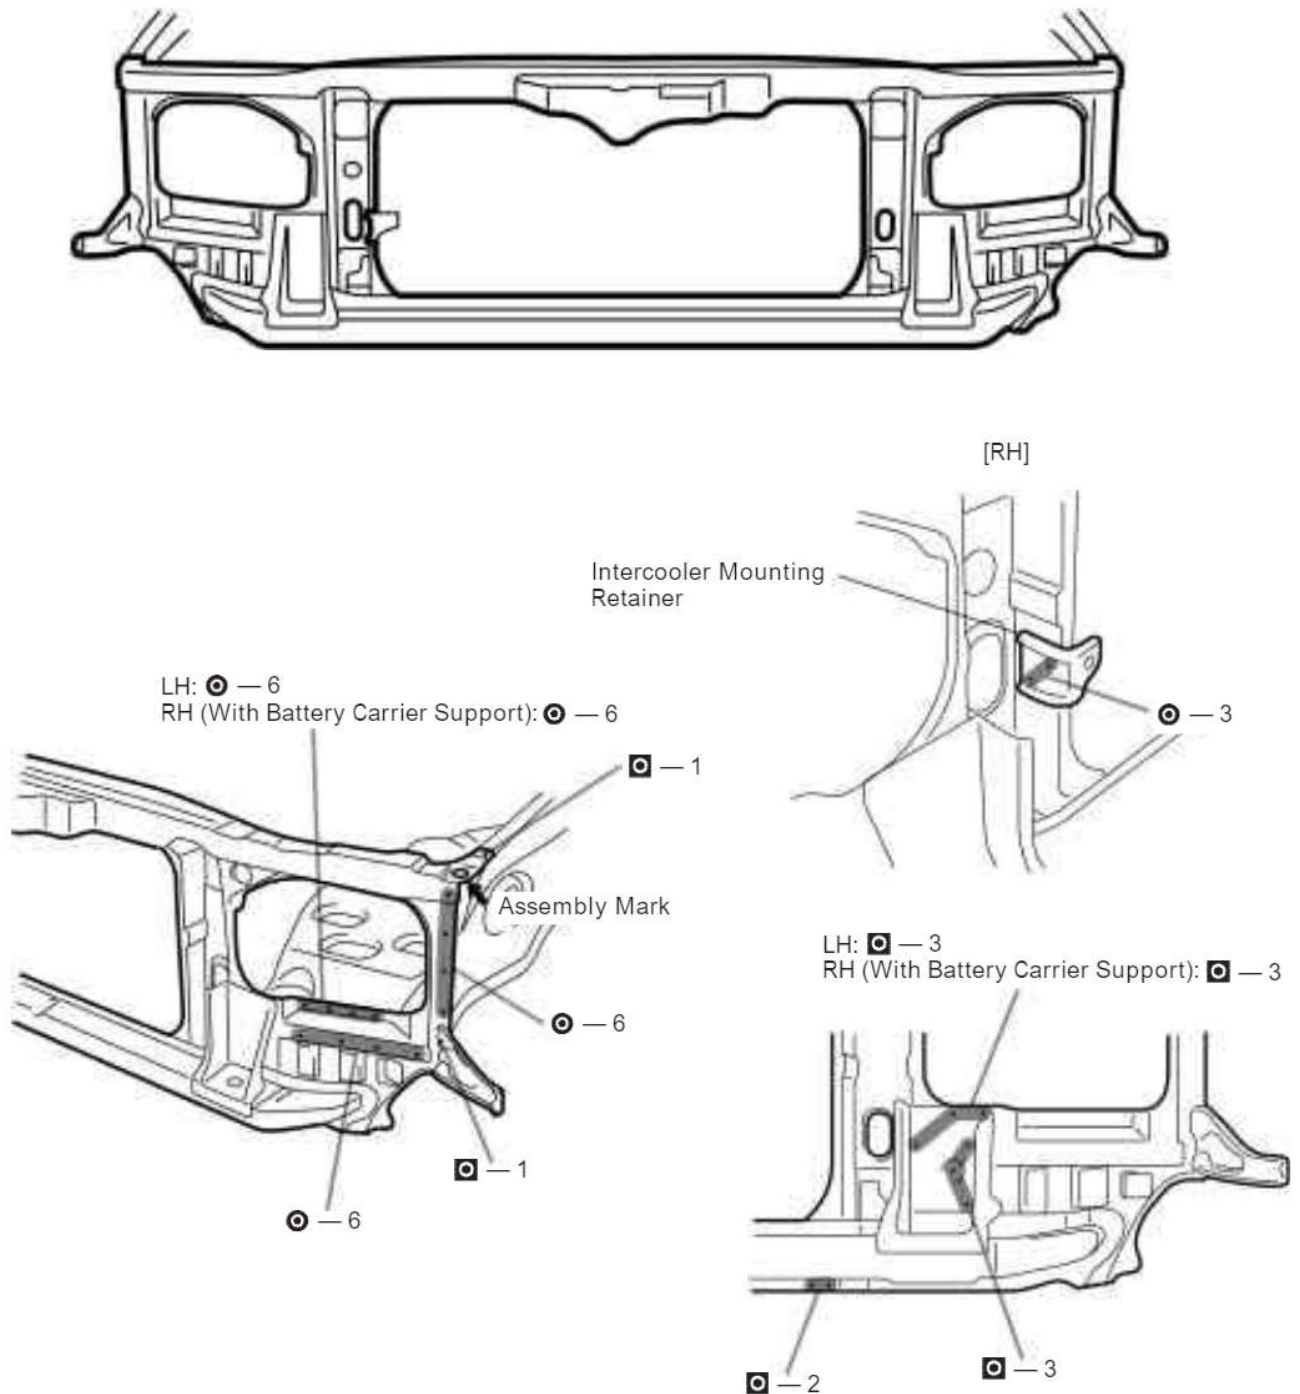


1. When temporarily installing the new parts, determine the installation position by the assembly mark. Then, measure each part in accordance with the body dimension diagram.


RE-10

BODY PANEL REPLACEMENT

COWL TOP SIDE PANEL (ASSY)

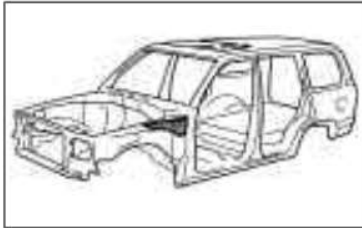

REMOVAL

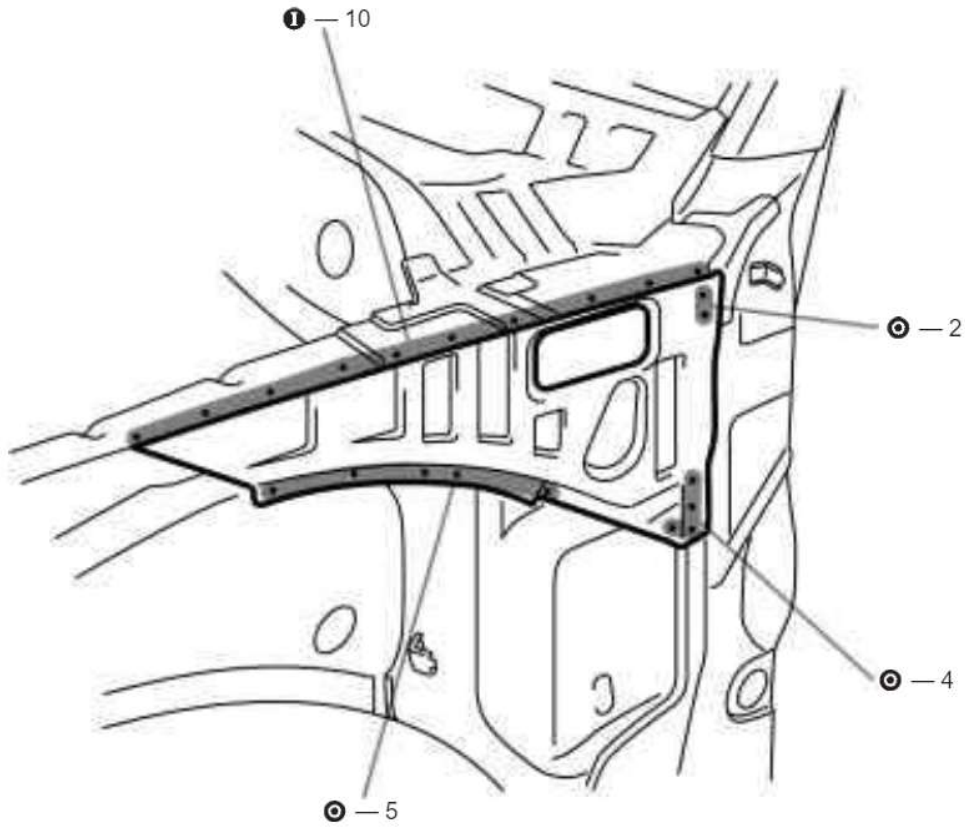


cardiagn.com

BODY PANEL REPLACEMENT

RE-11

INSTALLATION

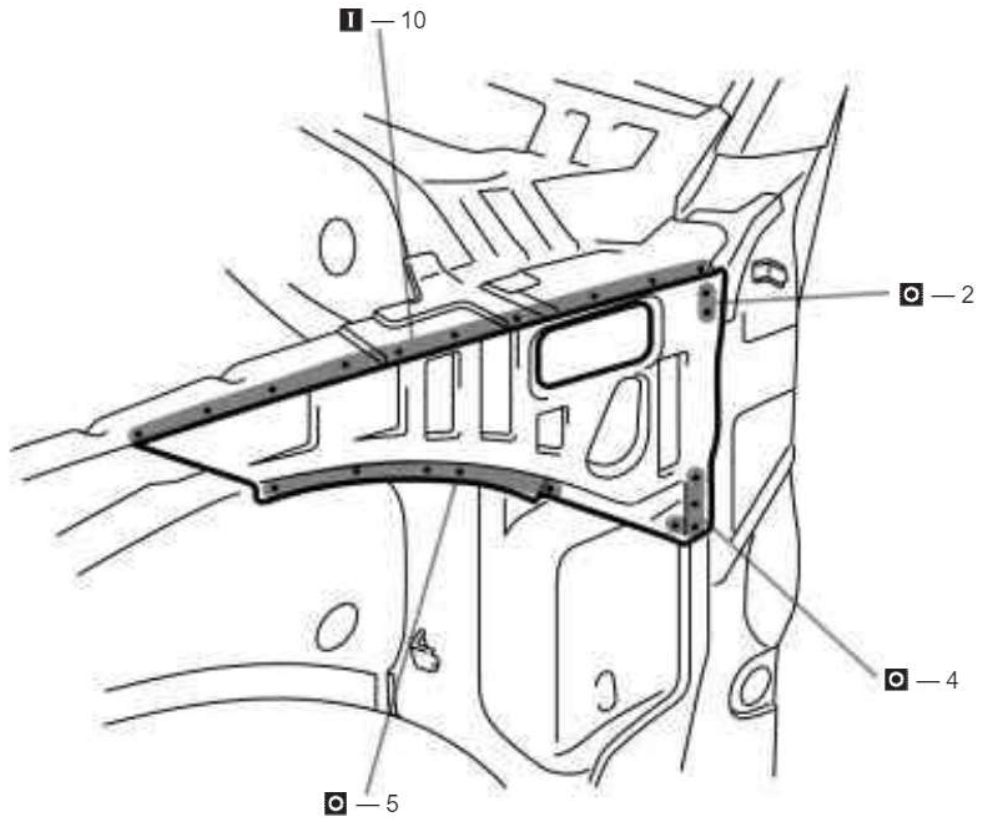


cardiagn.com




RE-12

BODY PANEL REPLACEMENT

FRONT FENDER APRON (ASSY)

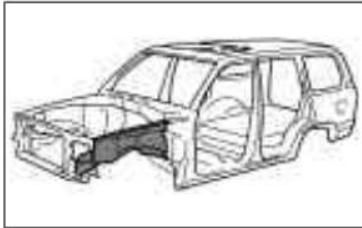

REMOVAL (With the radiator support, cowl top side panel removed.)

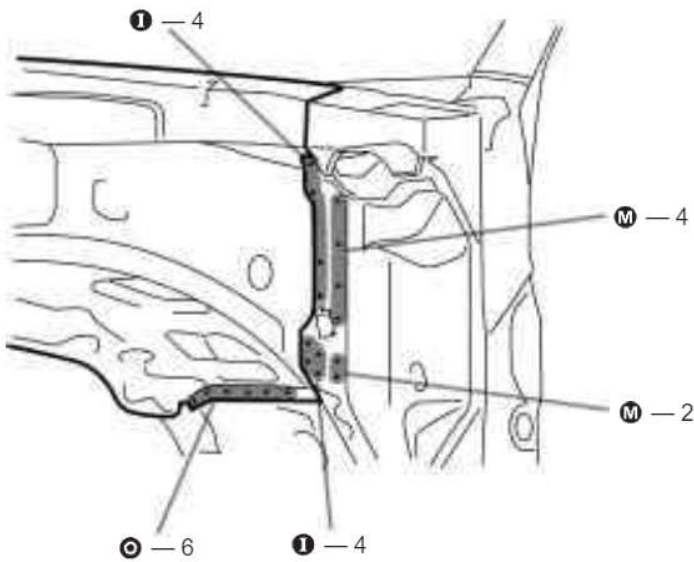
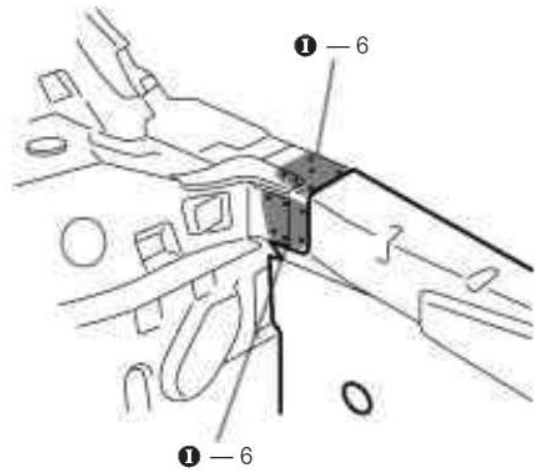
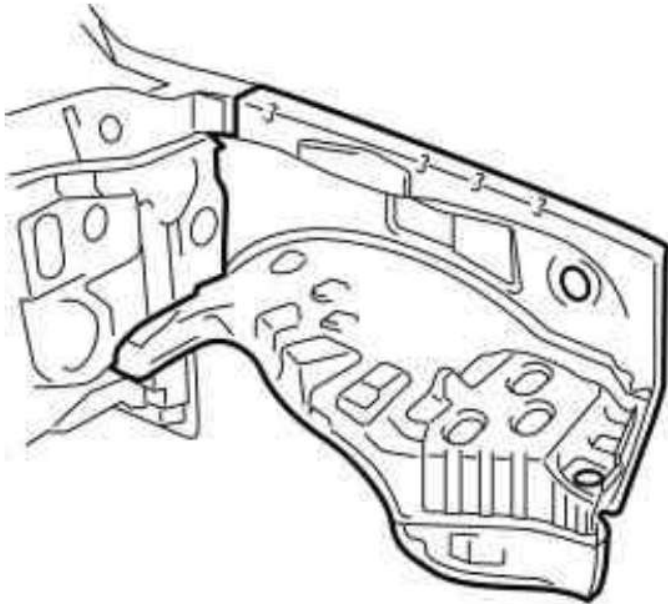


cardiagn.com

BODY PANEL REPLACEMENT

RE-13

INSTALLATION

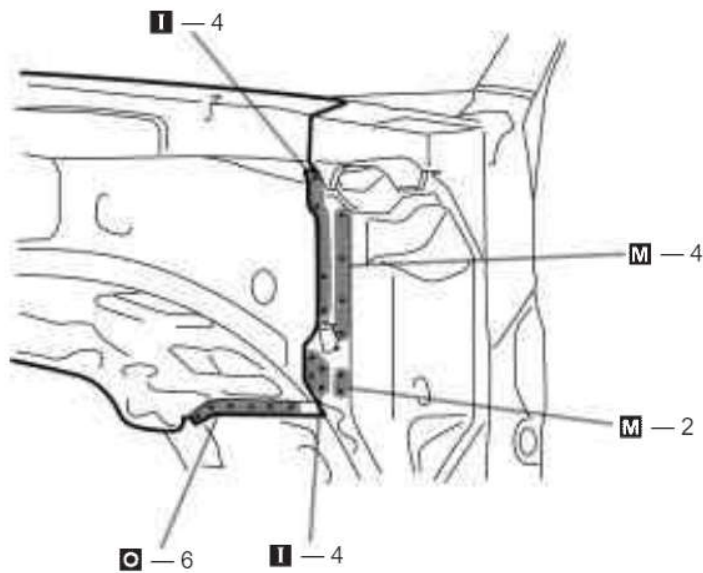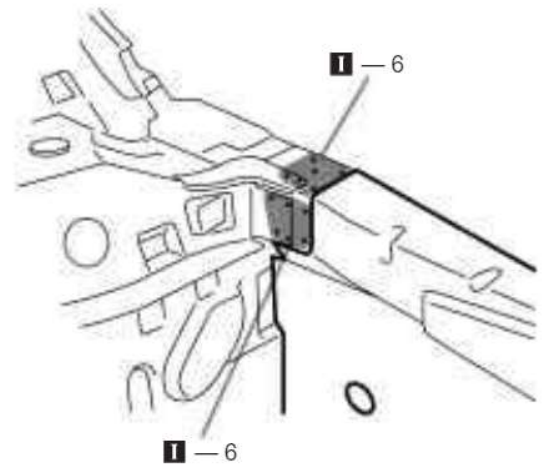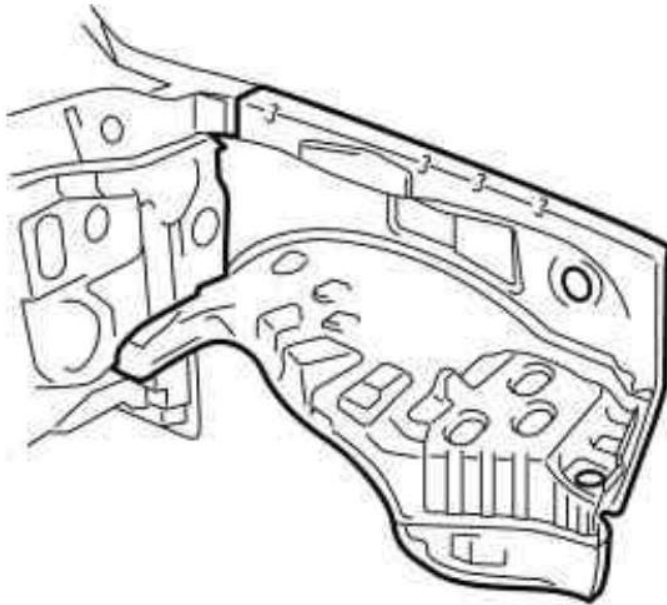


1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.
2. Temporarily install the front fender and hood, and check the fit.

BODY PANEL REPLACEMENT


RE-15

FRONT BODY PILLAR (CUT)

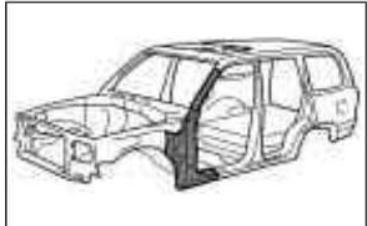


REMOVAL (With the cowl top side panel removed.)



Cut and Join Location
(Cut Location for Supply Parts)

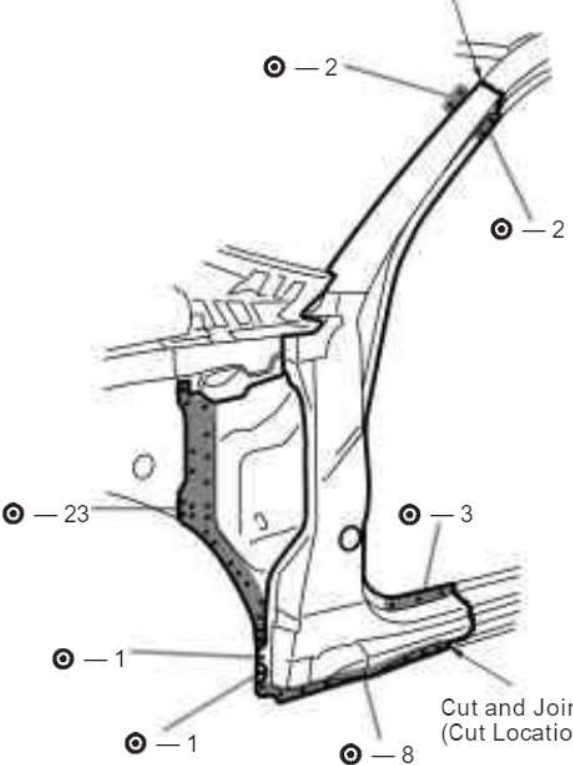

[Cut and Join Locations]

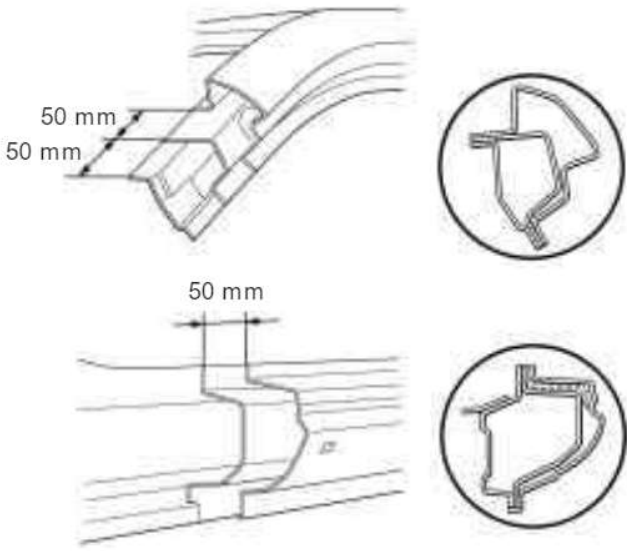

Cut and Join Location
(Cut Location for Supply Parts)

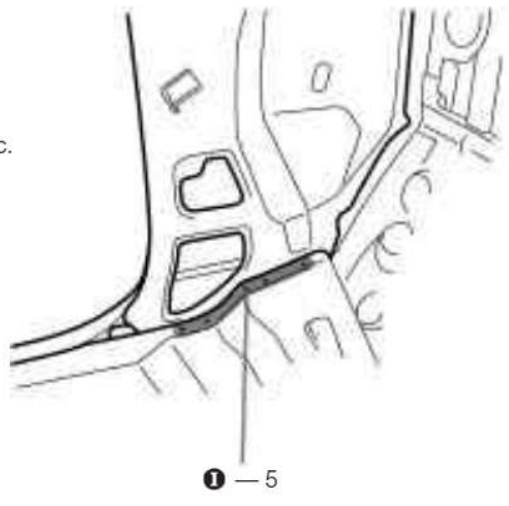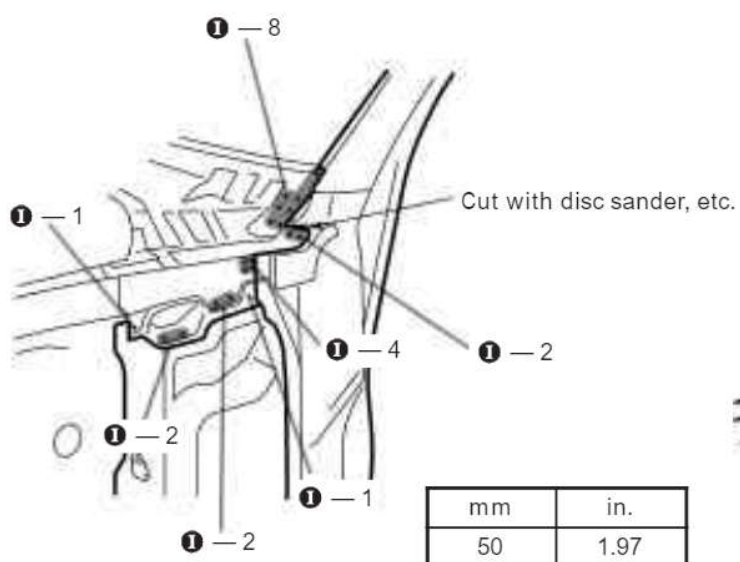

mm	in.
50	1.97


1. Cut and join the parts at the locations as shown above.
2. Cut and join the outer pillar and reinforcement and inner pillar at position shifted about 50 mm (1.97 in.)
3. Cut and join the rocker outer panel and rocker panel reinforcement at position shifted about 50 mm (1.97 in.)

cardiagn.com

RE-16

BODY PANEL REPLACEMENT


INSTALLATION

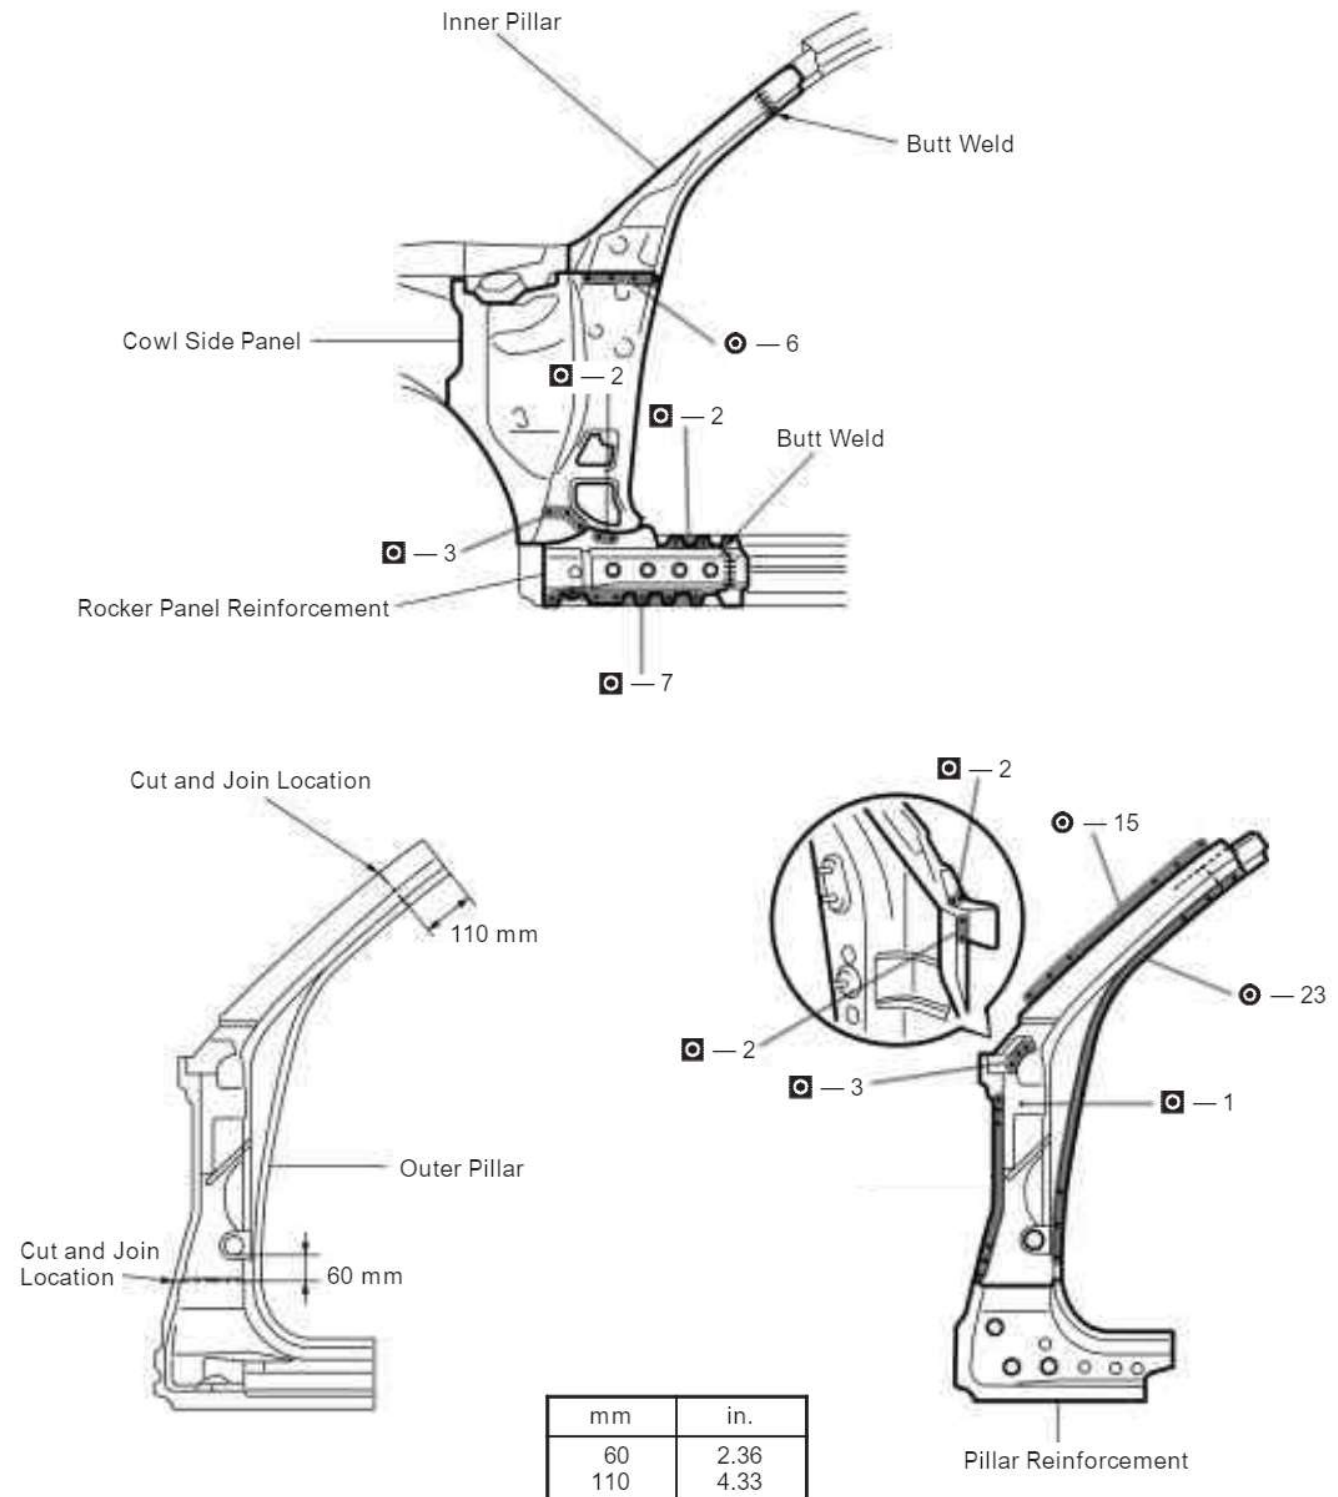

1. Install the inner pillar and rocker panel reinforcement to the vehicle side.
2. Cut the new parts for the outer pillar at the locations as shown above.
3. Before temporarily installing the new parts. Weld the pillar reinforcement and outer pillar with standard points.

HINT: After welding the pillar reinforcement finally attach it to the cut and join location tips.

BODY PANEL REPLACEMENT

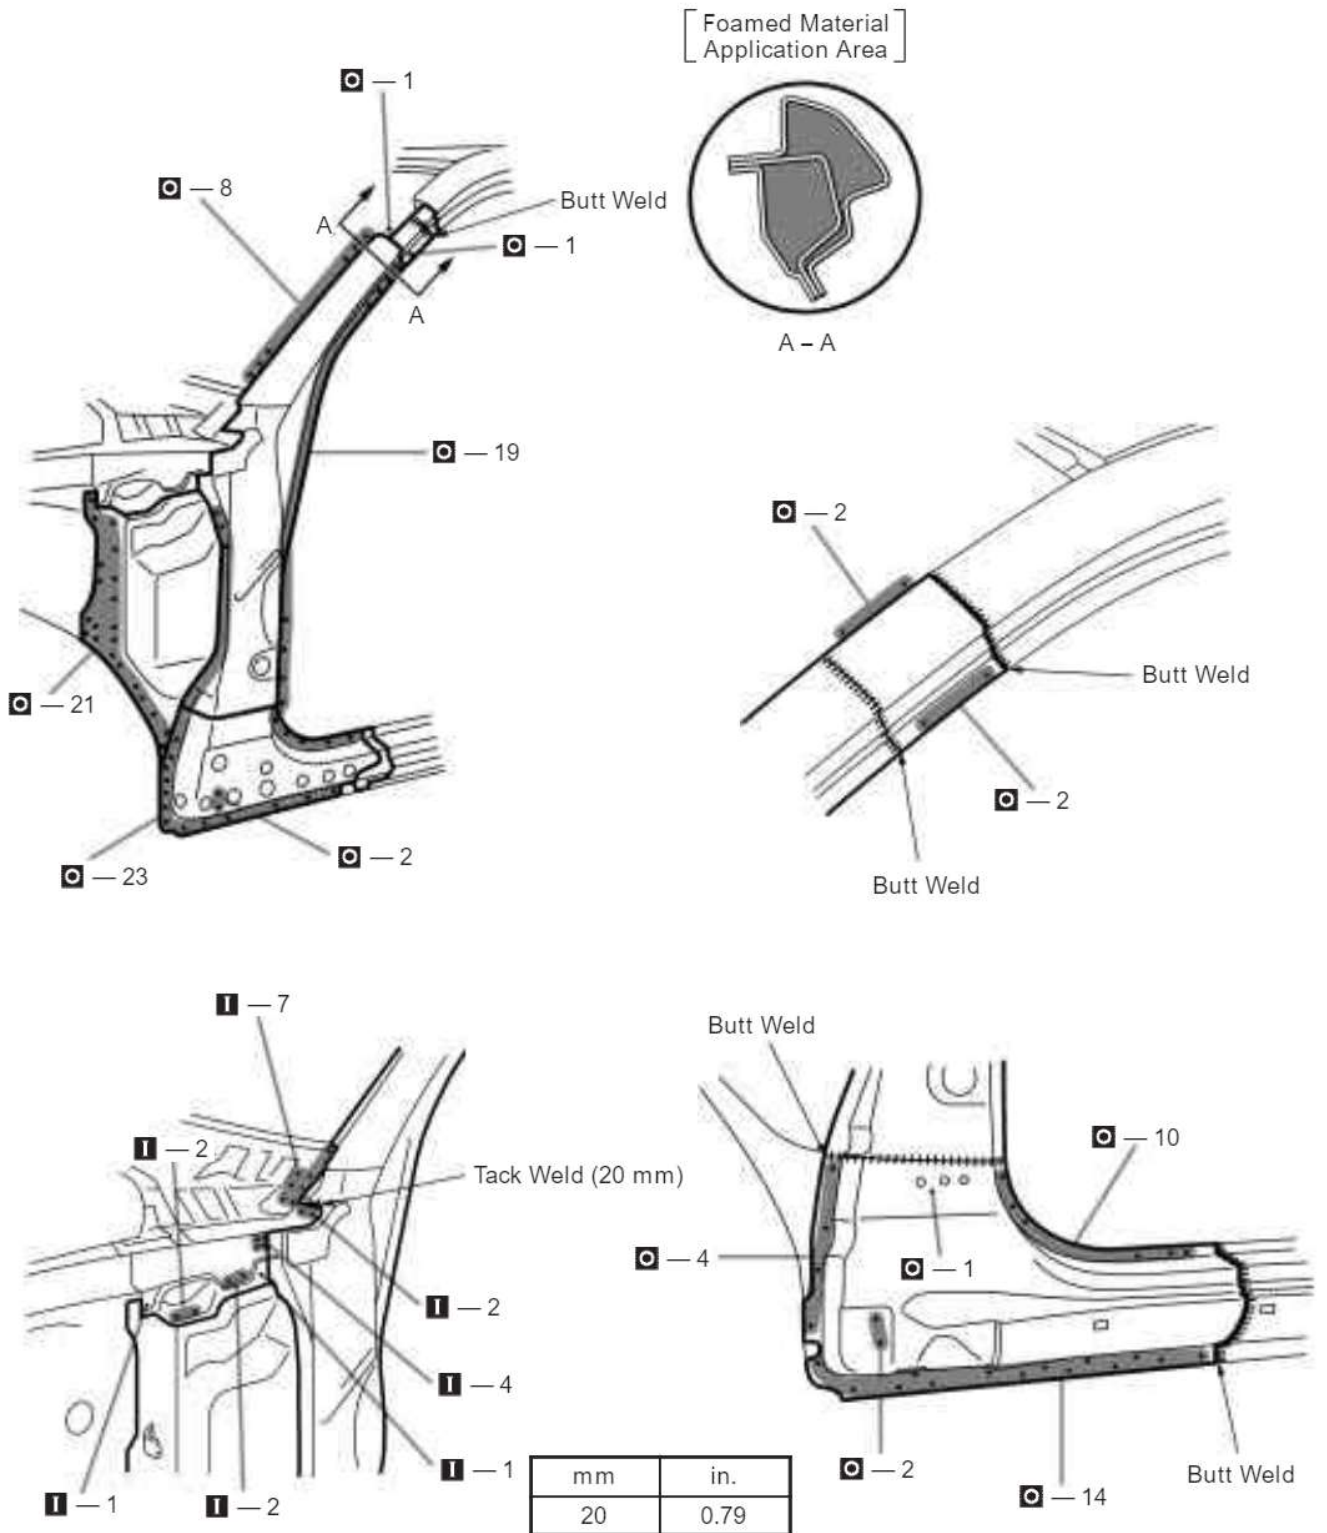


cardiagn.com

4. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.
5. Before welding the new parts, check the fit of the front door, front fender and windshield glass.
6. Apply foamed material to the pillar section.


RE-18

BODY PANEL REPLACEMENT

CENTER BODY PILLAR (CUT)

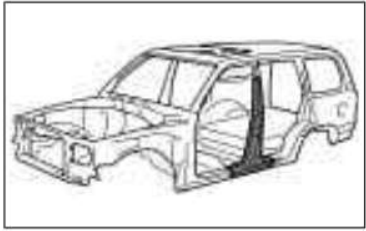

REMOVAL

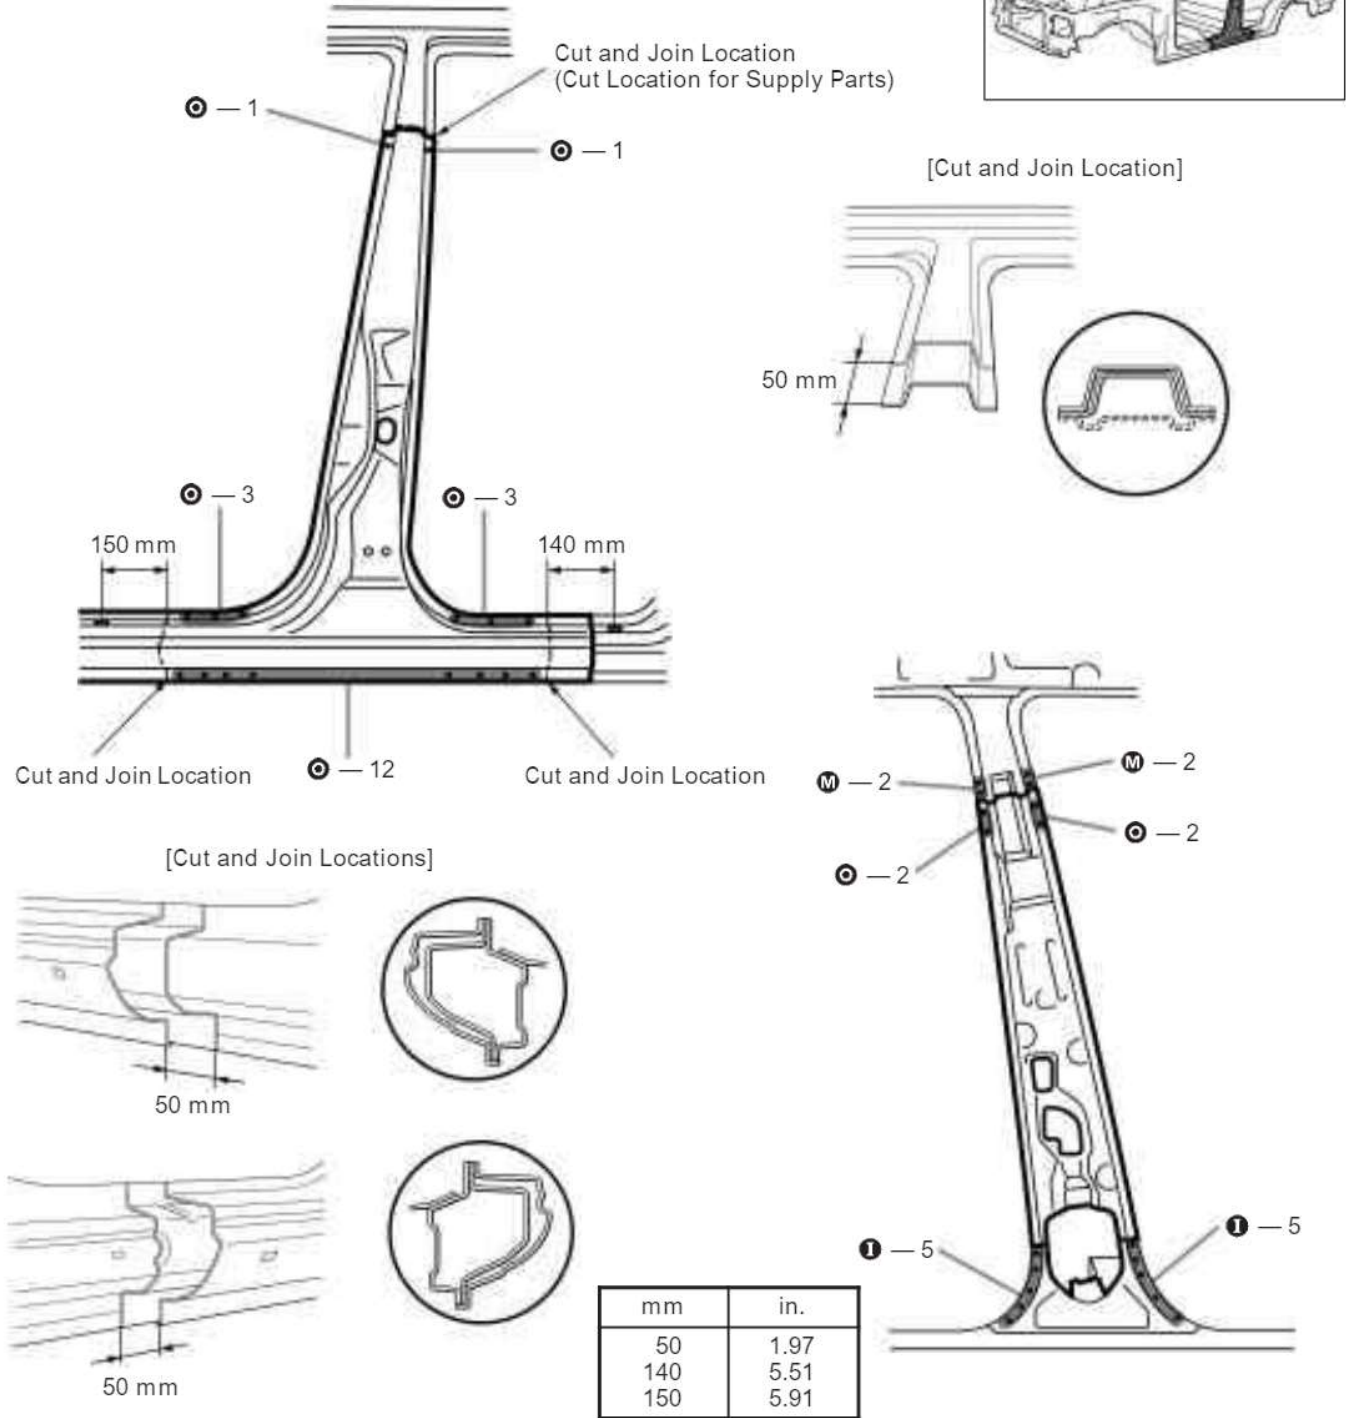


1. Cut and join the parts at the locations as shown above.
2. Cut and join the outer pillar and pillar reinforcement at position shifted about 50 mm (1.97 in.)
3. Cut and join the rocker outer panel and rocker panel reinforcement at position shifted about 50 mm (1.97 in.)

cardiagn.com

BODY PANEL REPLACEMENT

RE-19

INSTALLATION

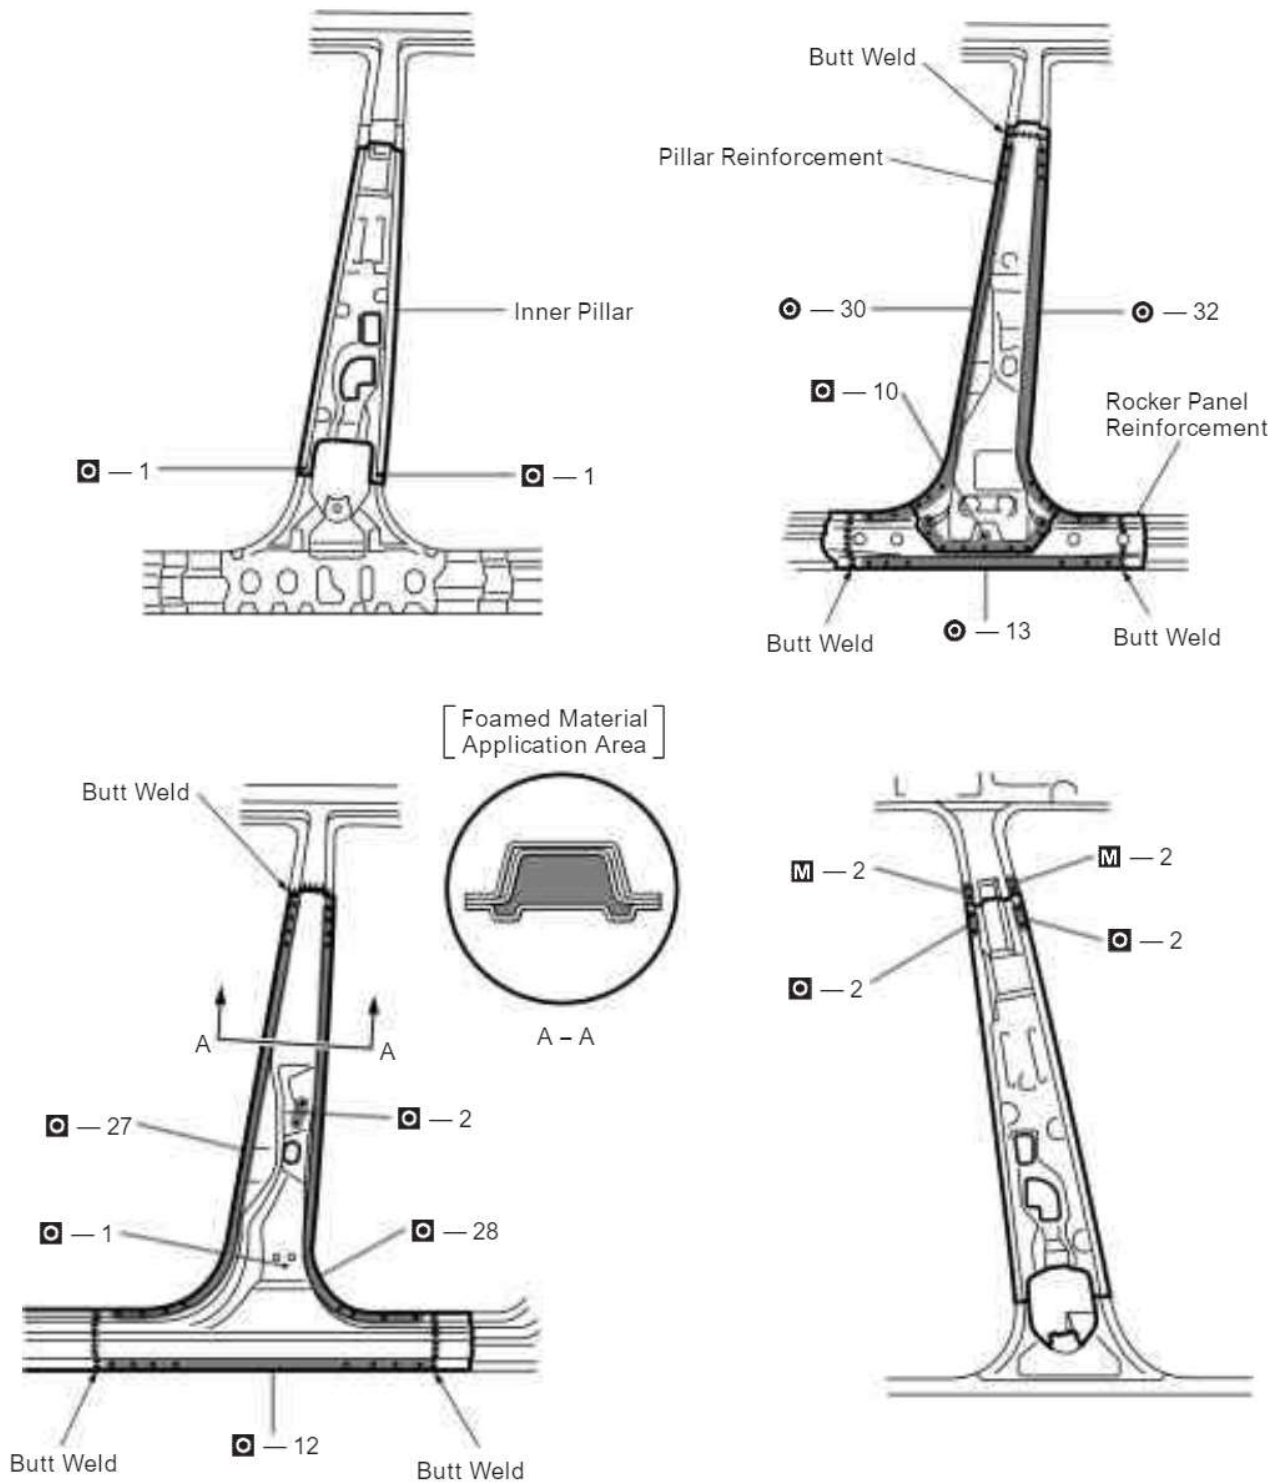



1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.
2. Temporarily install the new parts and check the fit of the front door and rear door.
3. After welding inner pillar and rocker panel reinforcement and pillar reinforcement to the vehicle install the outer pillar.
4. After installing the new parts, apply foamed materials.

RE-20

BODY PANEL REPLACEMENT

FLOOR SIDE INNER REAR MEMBER (ASSY)


REMOVAL (With the center body pillar removed.)

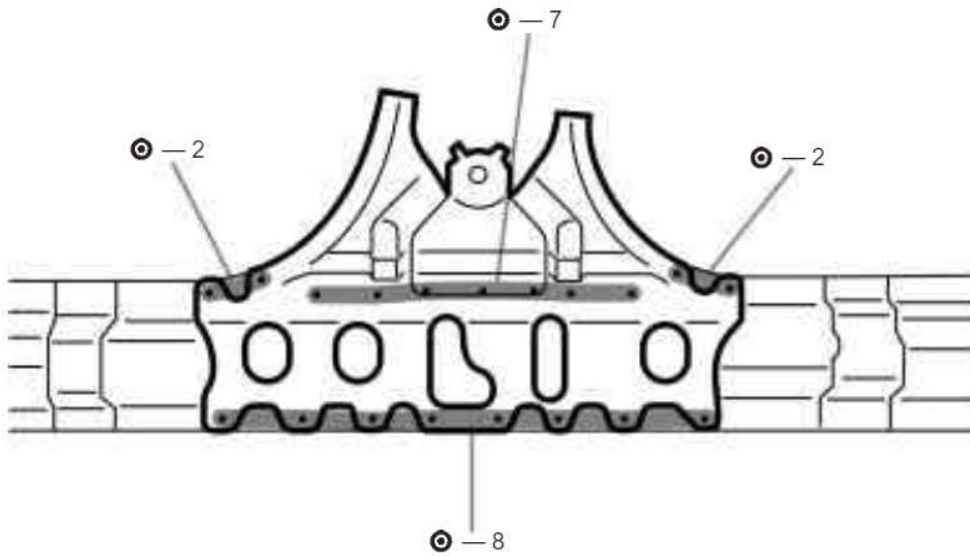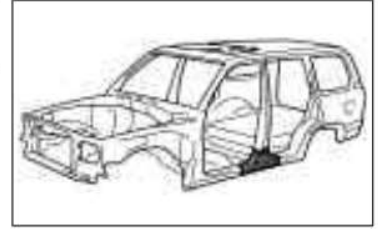

BODY PANEL REPLACEMENT

RE-21

INSTALLATION

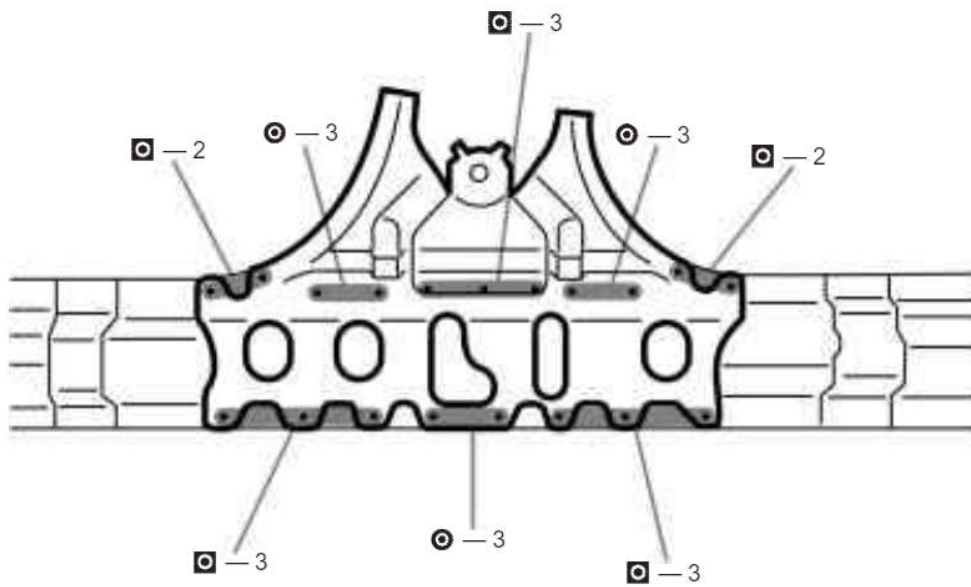




cardiagn.com

RE-22

BODY PANEL REPLACEMENT

FRONT DOOR OUTER PANEL (ASSY)

REMOVAL

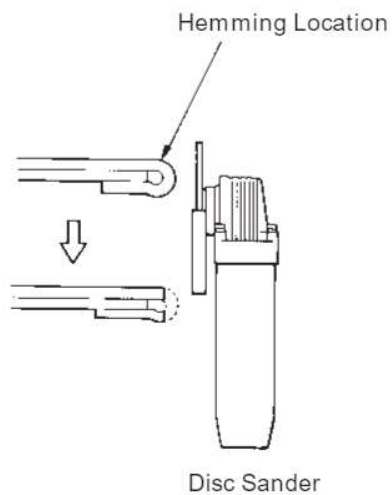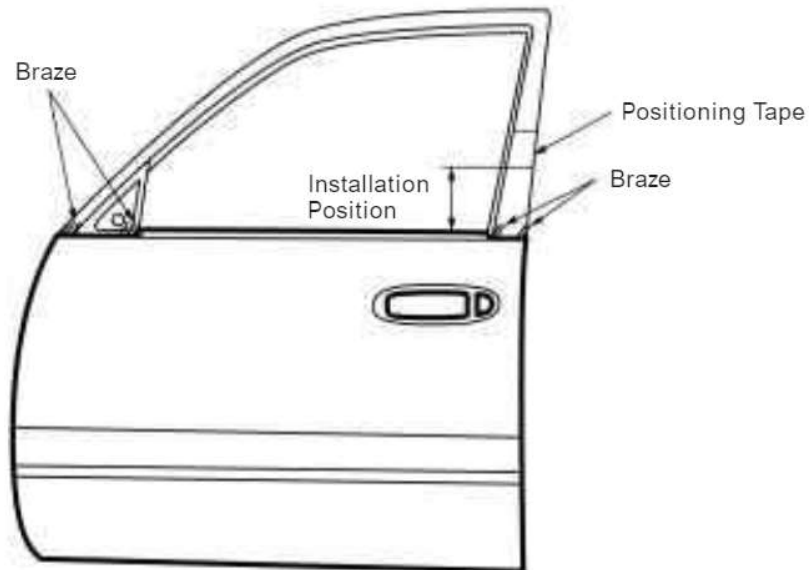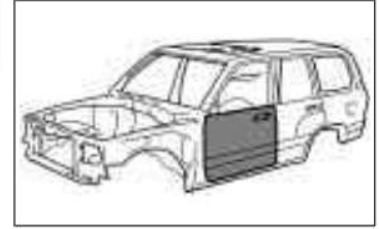


1. Before removing the outer panel, make the installation position with a tape.
2. After grinding off the hemming location, remove the outer panel.

BODY PANEL REPLACEMENT

RE-23

INSTALLATION

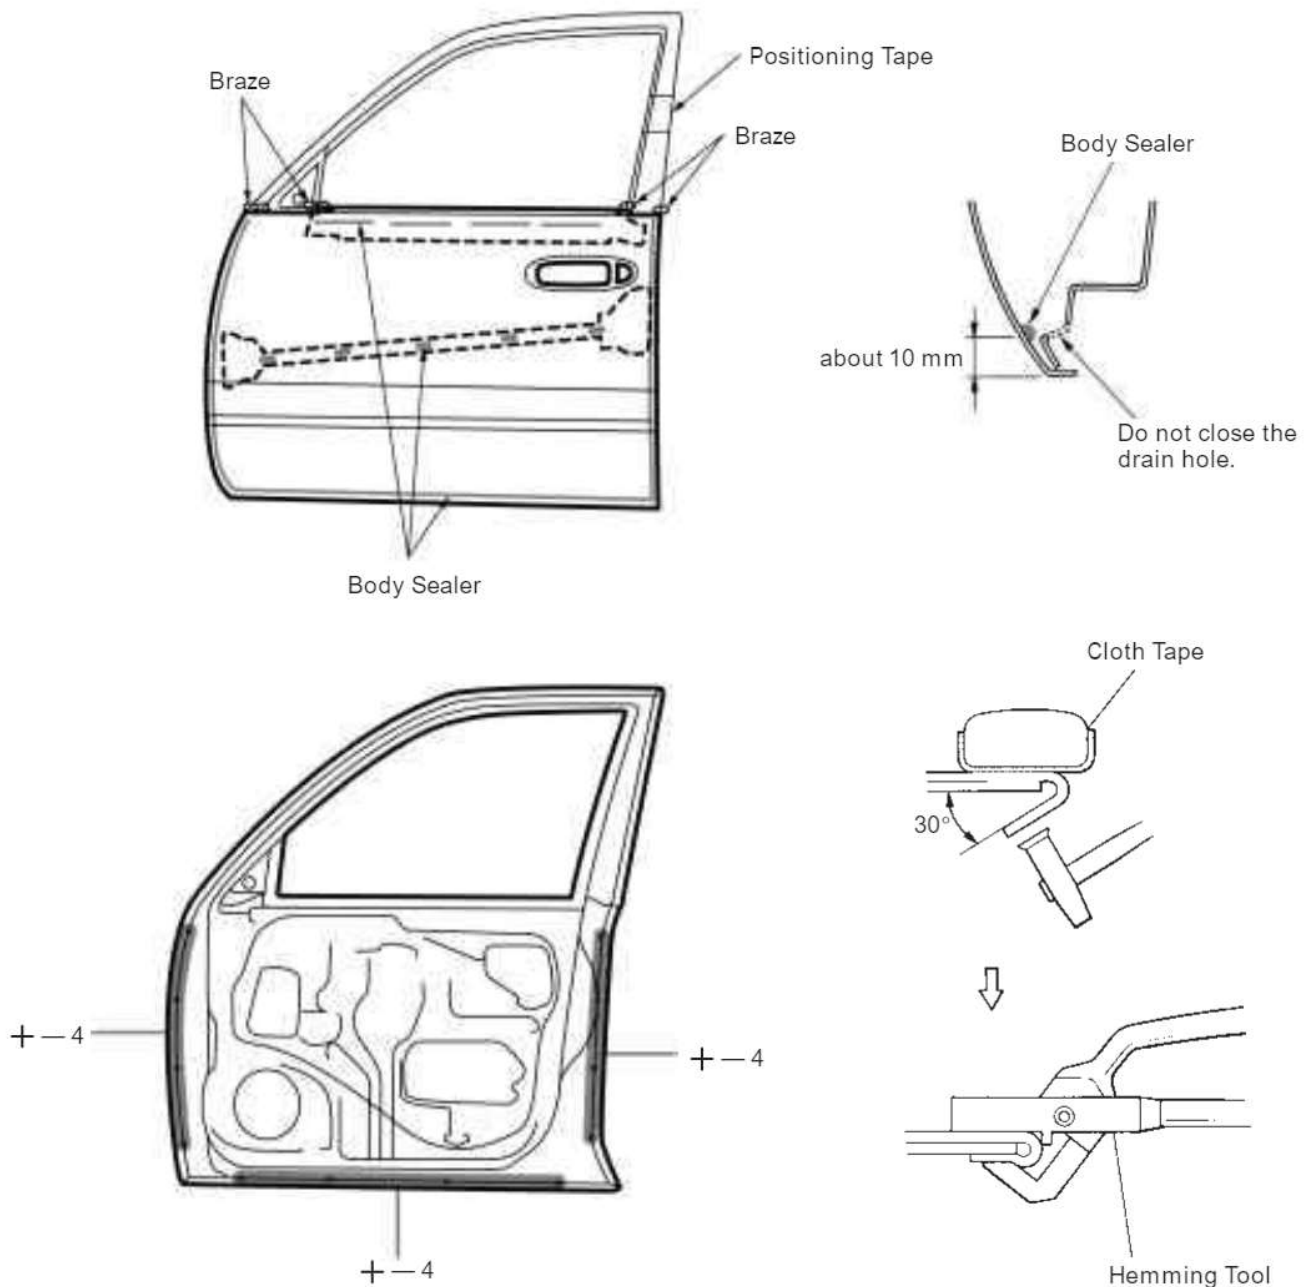

mm	in.
10	0.39

1. Before temporarily installing the new parts, apply body sealer to the reinforcement, side impact protection beam and back side of the new parts.

HINT:

- 1) Apply sealer evenly about 10 mm (0.39 in.) from the flange and 3 mm (0.12 in.) in diameter to the outer panel and apply just enough sealer for the reinforcement and side impact protection beam to make contact.
- 2) For other sealing points, refer to section AR.

2. Bend the flange hem about 30° with a hammer and dolly, then fasten tightly with a hemming tool.

HINT:




- 1) Perform hemming in three steps, being careful not to warp the panel.
- 2) If a hemming tool cannot be used, hem with a hammer and dolly.

RE-24

BODY PANEL REPLACEMENT

REAR DOOR OUTER PANEL (ASSY)

REMOVAL

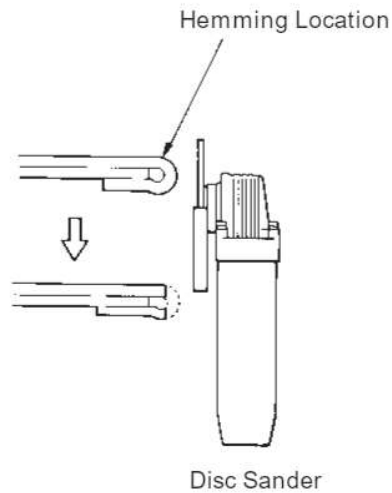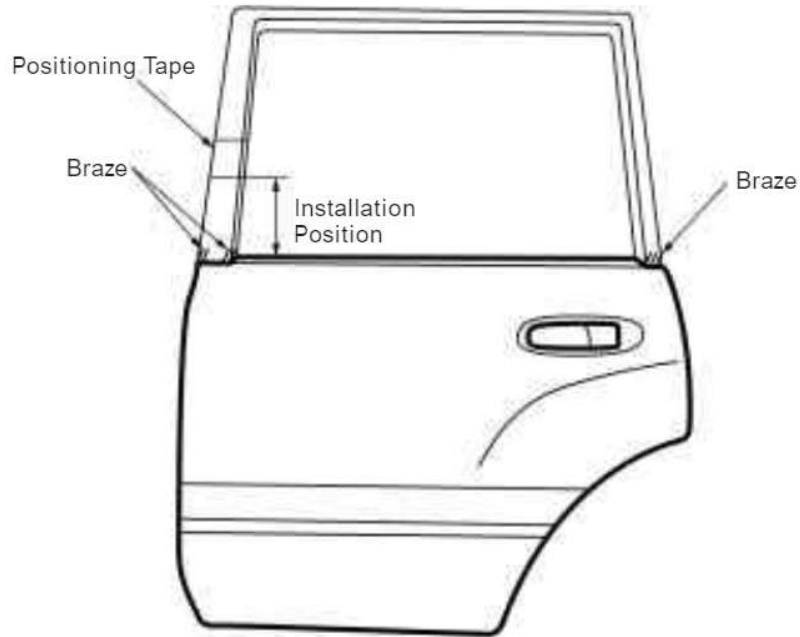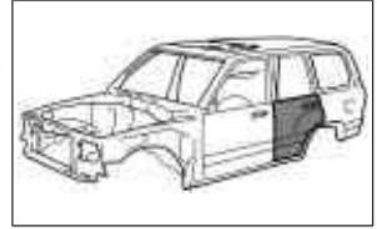


1. Before removing the outer panel, make the installation position with a tape.
2. After grinding off the hemming location, remove the outer panel.

BODY PANEL REPLACEMENT

RE-25

INSTALLATION

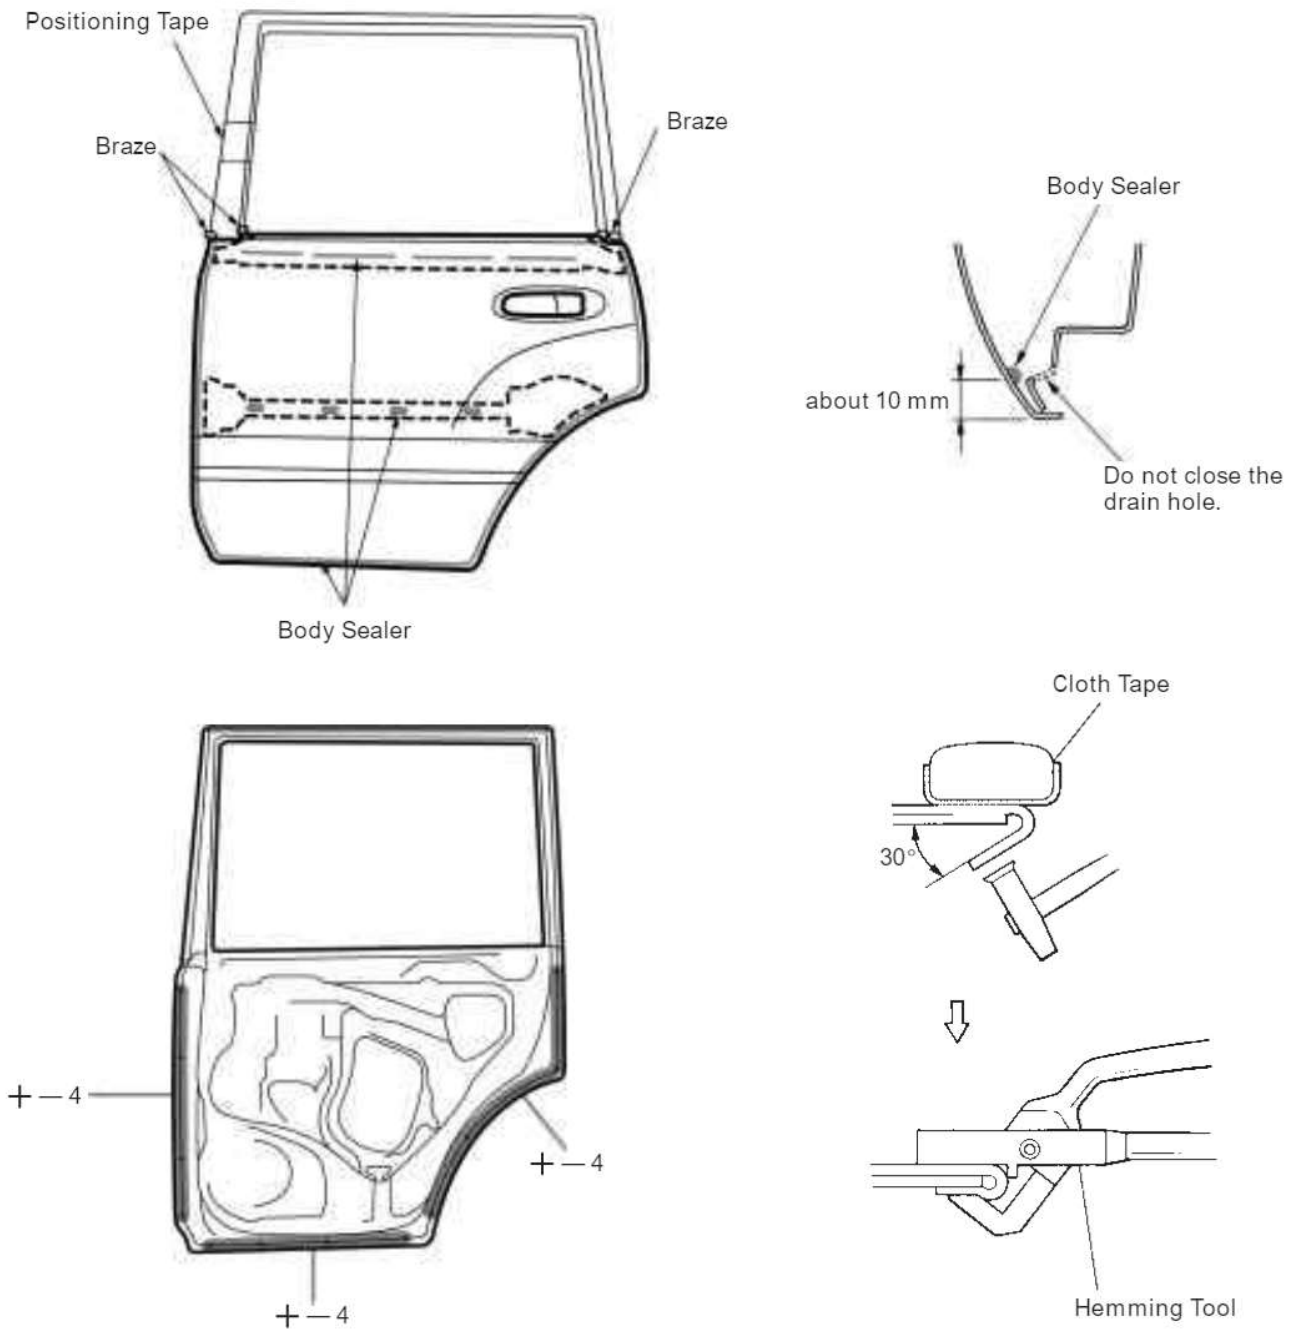

mm	in.
10	0.39

- Before temporarily installing the new parts, apply body sealer to the reinforcement, side impact protection beam and back side of the new parts.

HINT:

- Apply sealer evenly about 10 mm (0.39 in.) from the flange and 3 mm (0.12 in.) in diameter to the outer panel and apply just enough sealer for the reinforcement and side impact protection beam to make contact.
- For other sealing points, refer to section AR.

- Bend the flange hem about 30° with a hammer and dolly, then fasten tightly with a hemming tool.


HINT:

- Perform hemming in three steps, being careful not to warp the panel.
- If a hemming tool cannot be used, hem with a hammer and dolly.

RE-26



BODY PANEL REPLACEMENT

ROCKER OUTER PANEL (CUT)

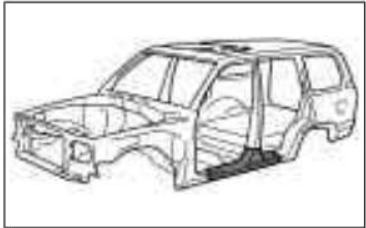

REMOVAL

[Cut and Join Locations]

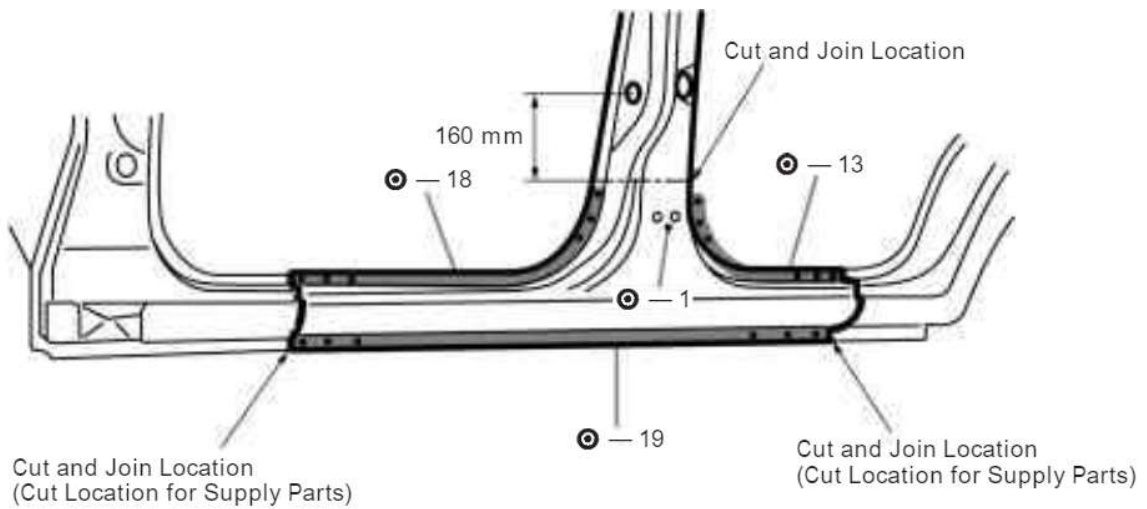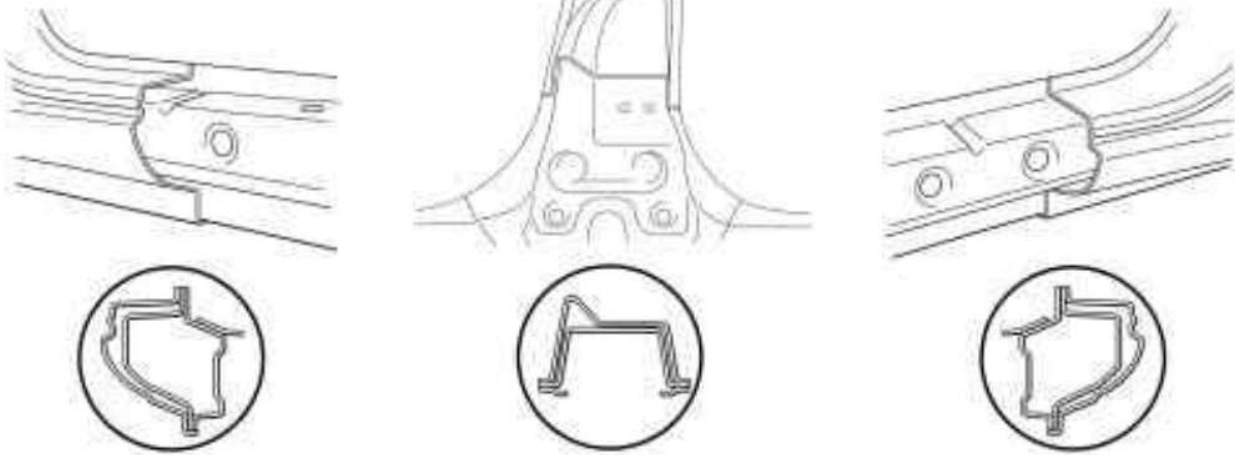

1. Cut and join the parts at the locations as shown above.

HINT: Take care not to damage the internal reinforcement.


mm	in.
160	6.30

cardiagn.com

BODY PANEL REPLACEMENT

RE-27

INSTALLATION

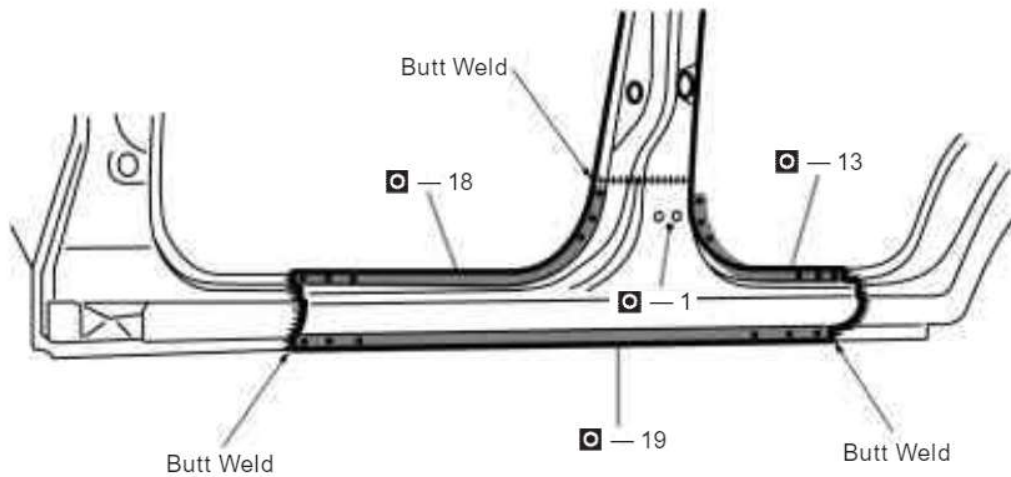


1. Before welding the new parts, check the fit of the front door and rear door.


RE-28

BODY PANEL REPLACEMENT

QUARTER PANEL (CUT)

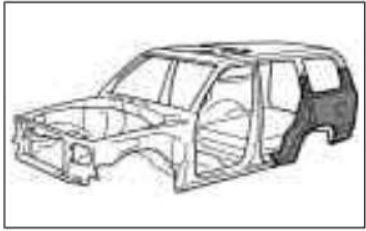

REMOVAL

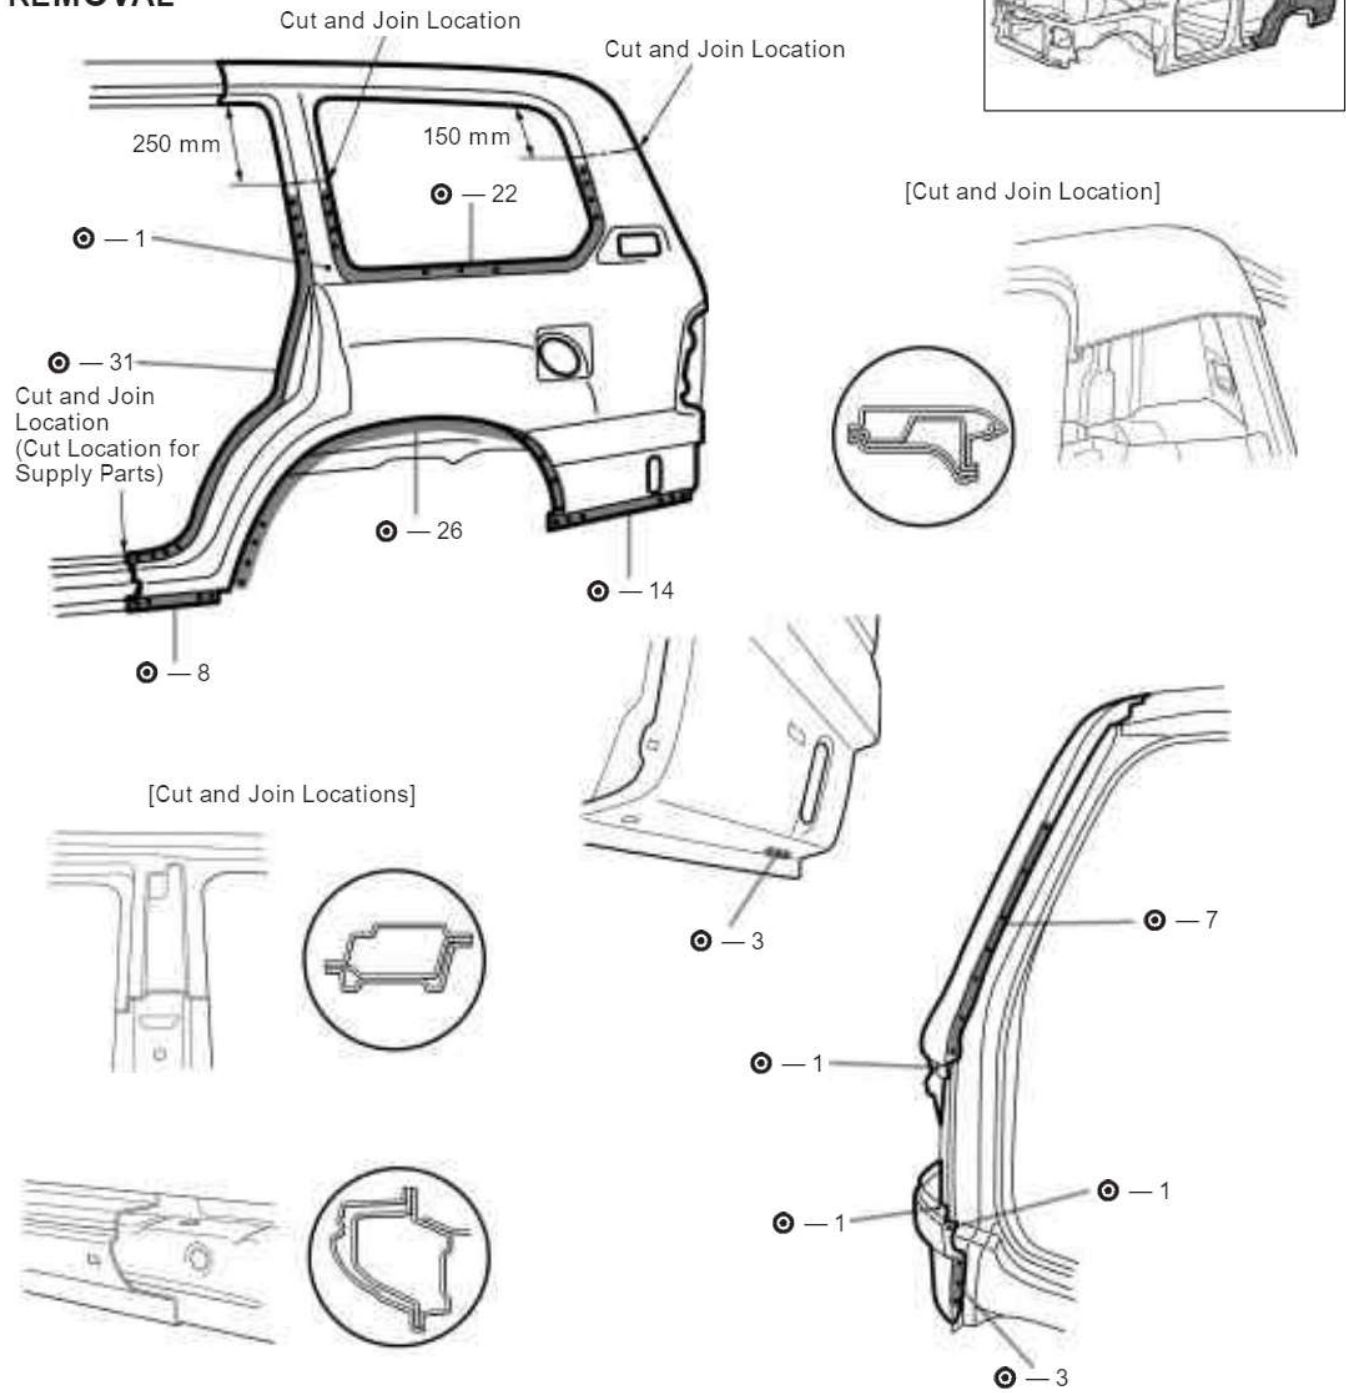


1. Cut and join the parts at the locations as shown above.

mm	in.
150	5.91
250	9.84

BODY PANEL REPLACEMENT

RE-29

INSTALLATION

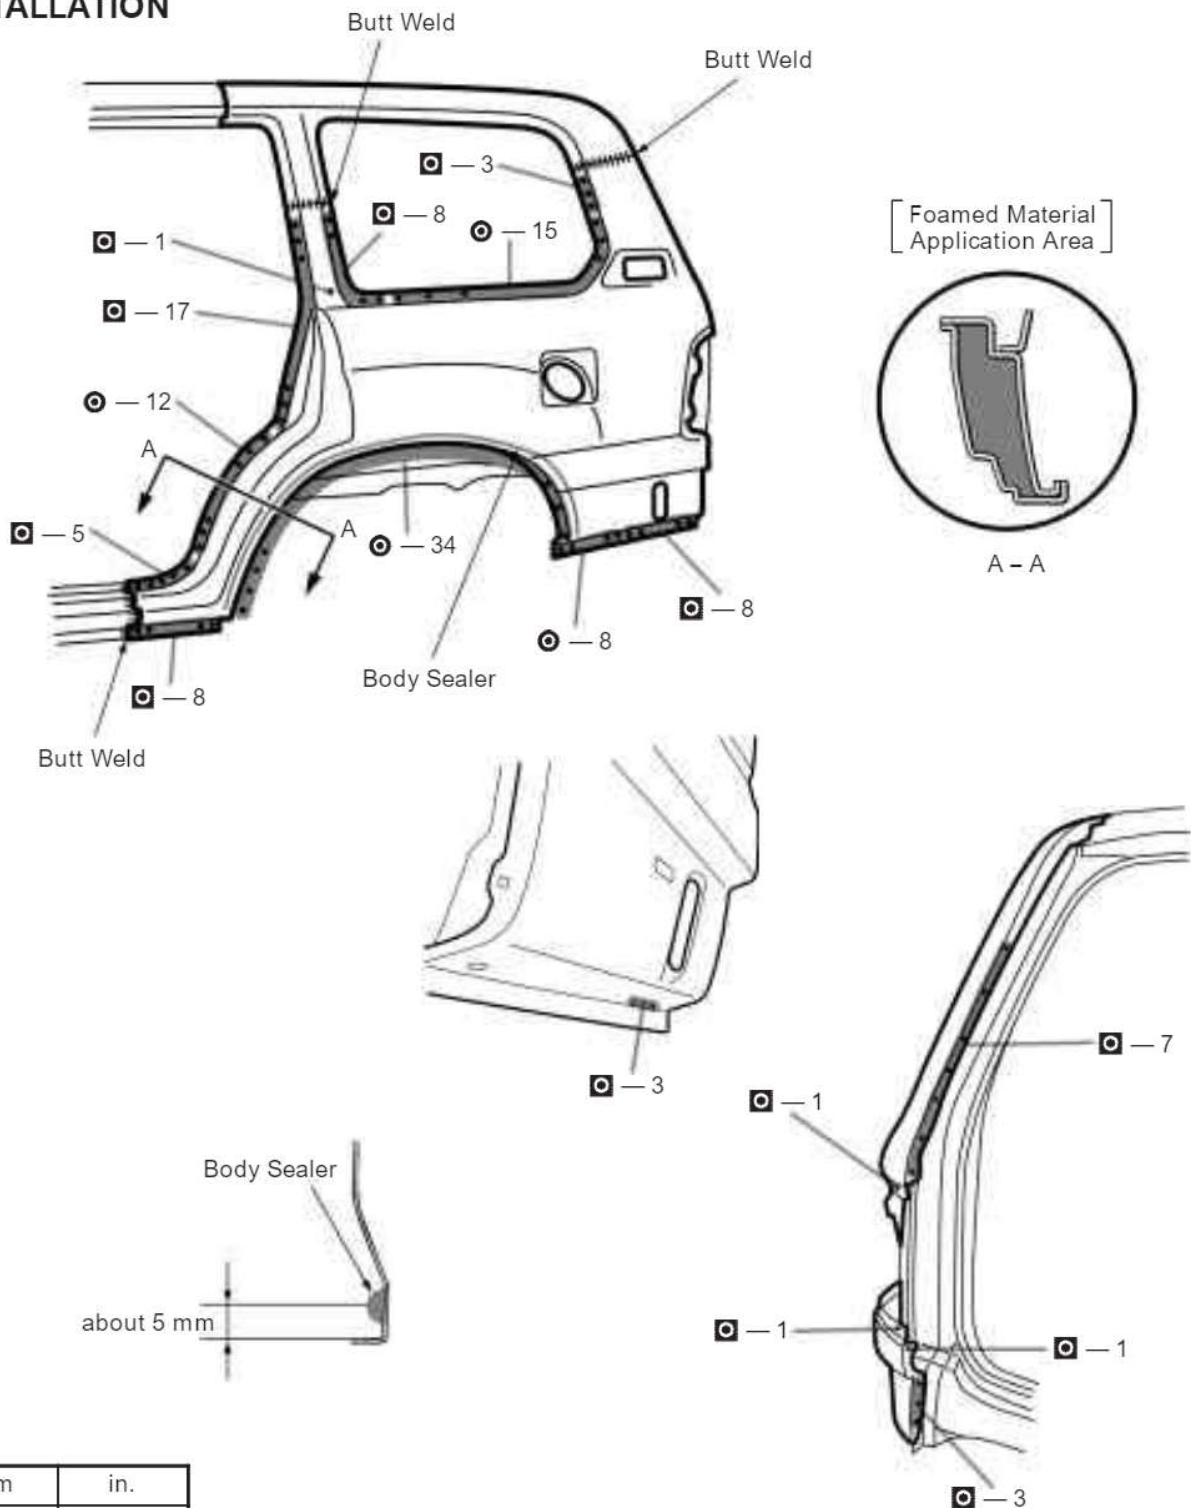

mm	in.
5	0.20

1. Before temporarily installing the new parts, apply body sealer to the wheel arch.
2. Temporarily install the new parts and check the fit of the rear door, back door, tail gate or back door and rear combination light.

HINT:



- 1) Apply body sealer about 5 mm (0.20 in.) from the flange, avoiding any oozing.
- 2) Apply sealer evenly, about 3 – 4 mm (0.12 – 0.16 in.) in diameter.
- 3) For other sealing points, refer to section AR.

RE-30

BODY PANEL REPLACEMENT

QUARTER PANEL (CUT-P)

REMOVAL

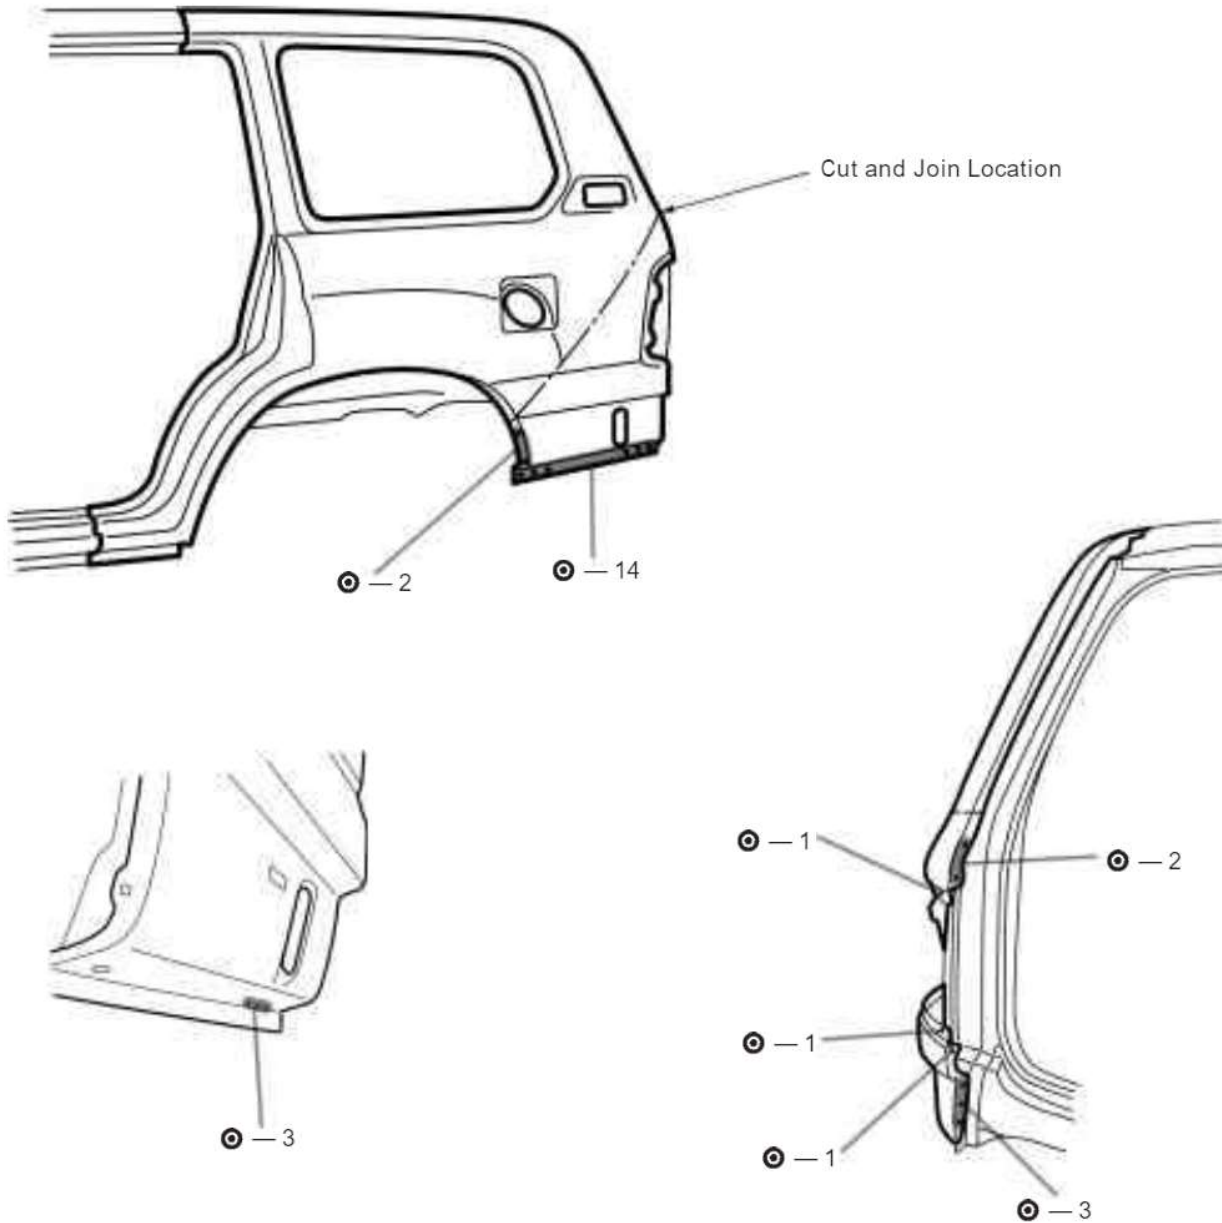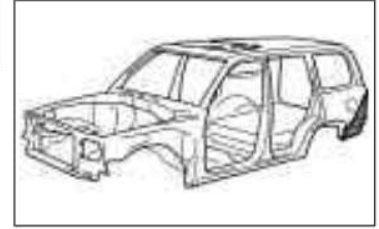


1. Cut and join the parts at the location as shown above.

BODY PANEL REPLACEMENT

RE-31

INSTALLATION

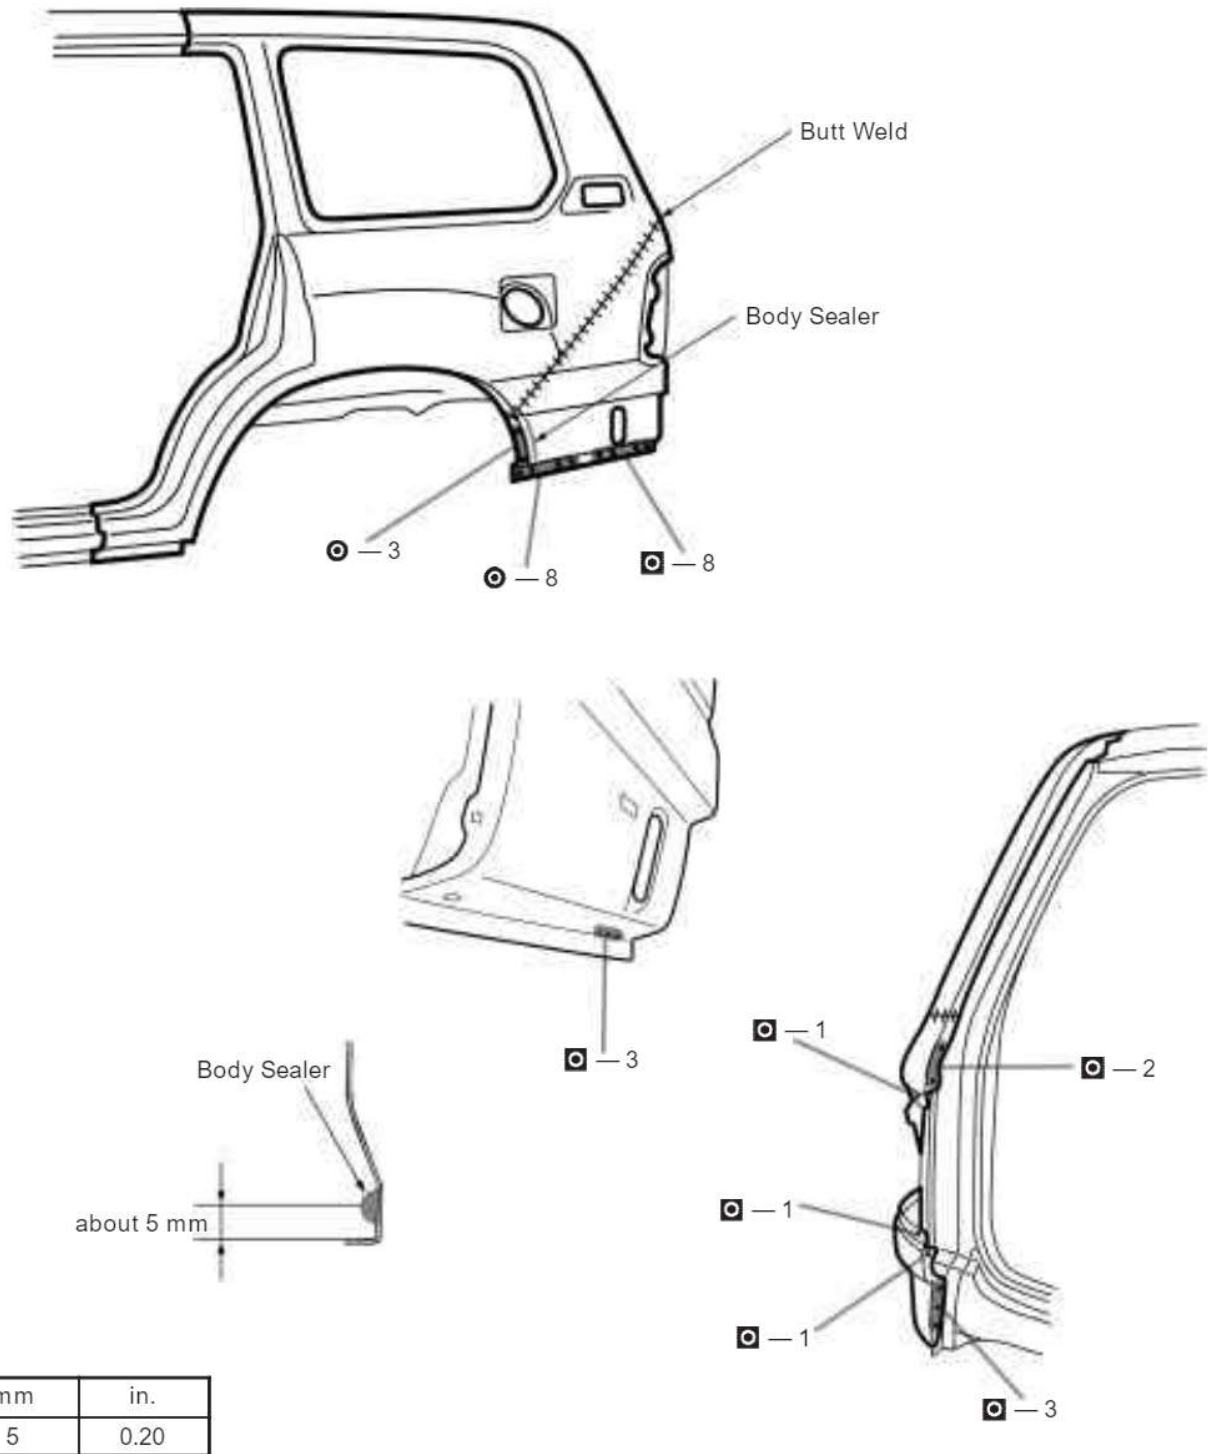


mm	in.
5	0.20

1. Before temporarily installing the new parts, apply body sealer to the wheel arch.
2. Temporarily install the new parts and check the fit of the tail gate or back door and rear combination light.

HINT:



- 1) Apply body sealer about 5 mm (0.20 in.) from the flange, avoiding any oozing.
- 2) Apply sealer evenly, about 3 – 4 mm (0.12 – 0.16 in.) in diameter.
- 3) For other sealing points, refer to section AR.

QUARTER WHEEL HOUSING OUTER PANEL (ASSY): Right Side



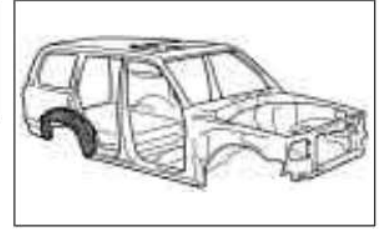


REMOVAL (With the quarter panel removed.)

Rocker Panel Reinforcement

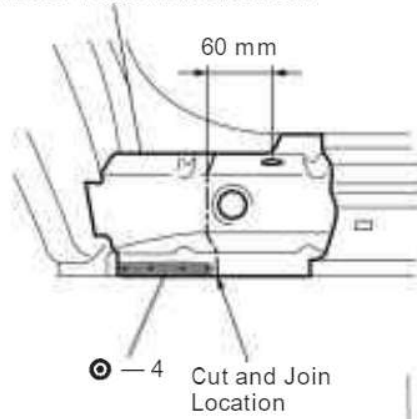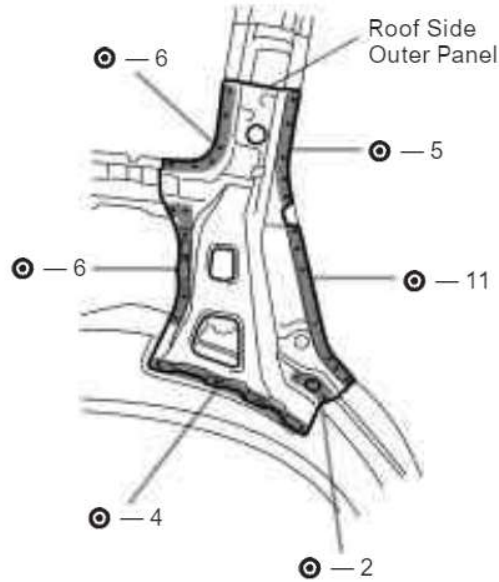

mm	in.
60	2.36

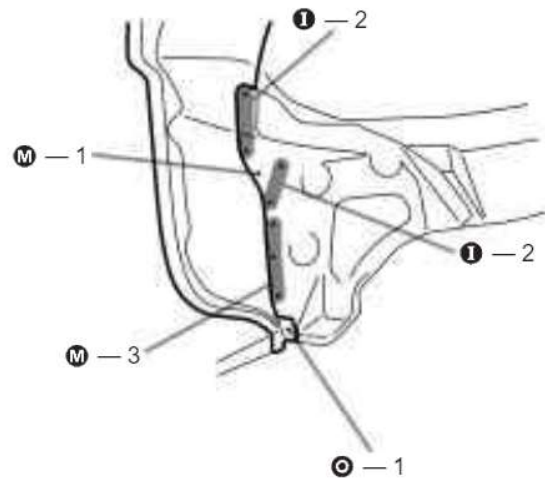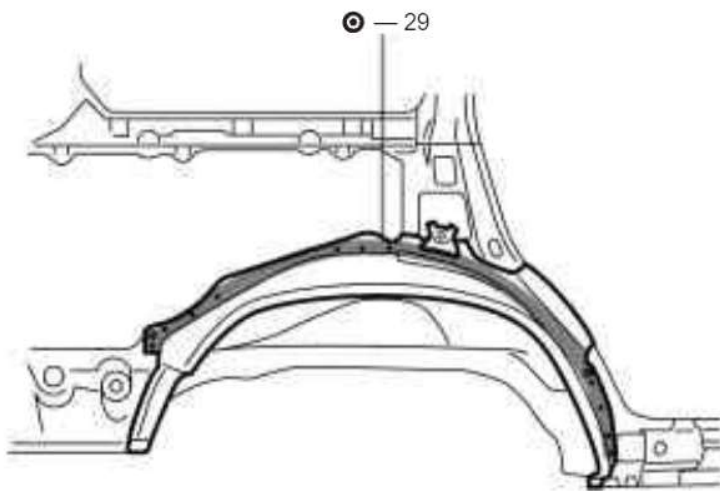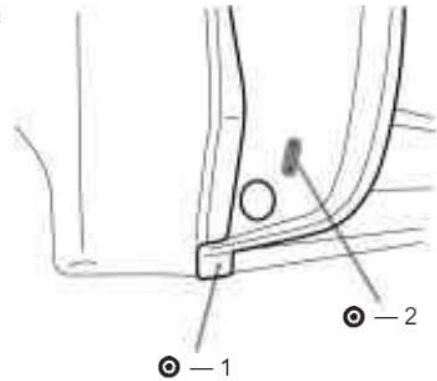


1. Cut and join the rocker panel reinforcement at the location as shown above.
2. After removing the roof side outer panel, remove the quarter wheel housing outer panel.

BODY PANEL REPLACEMENT

RE-33

INSTALLATION

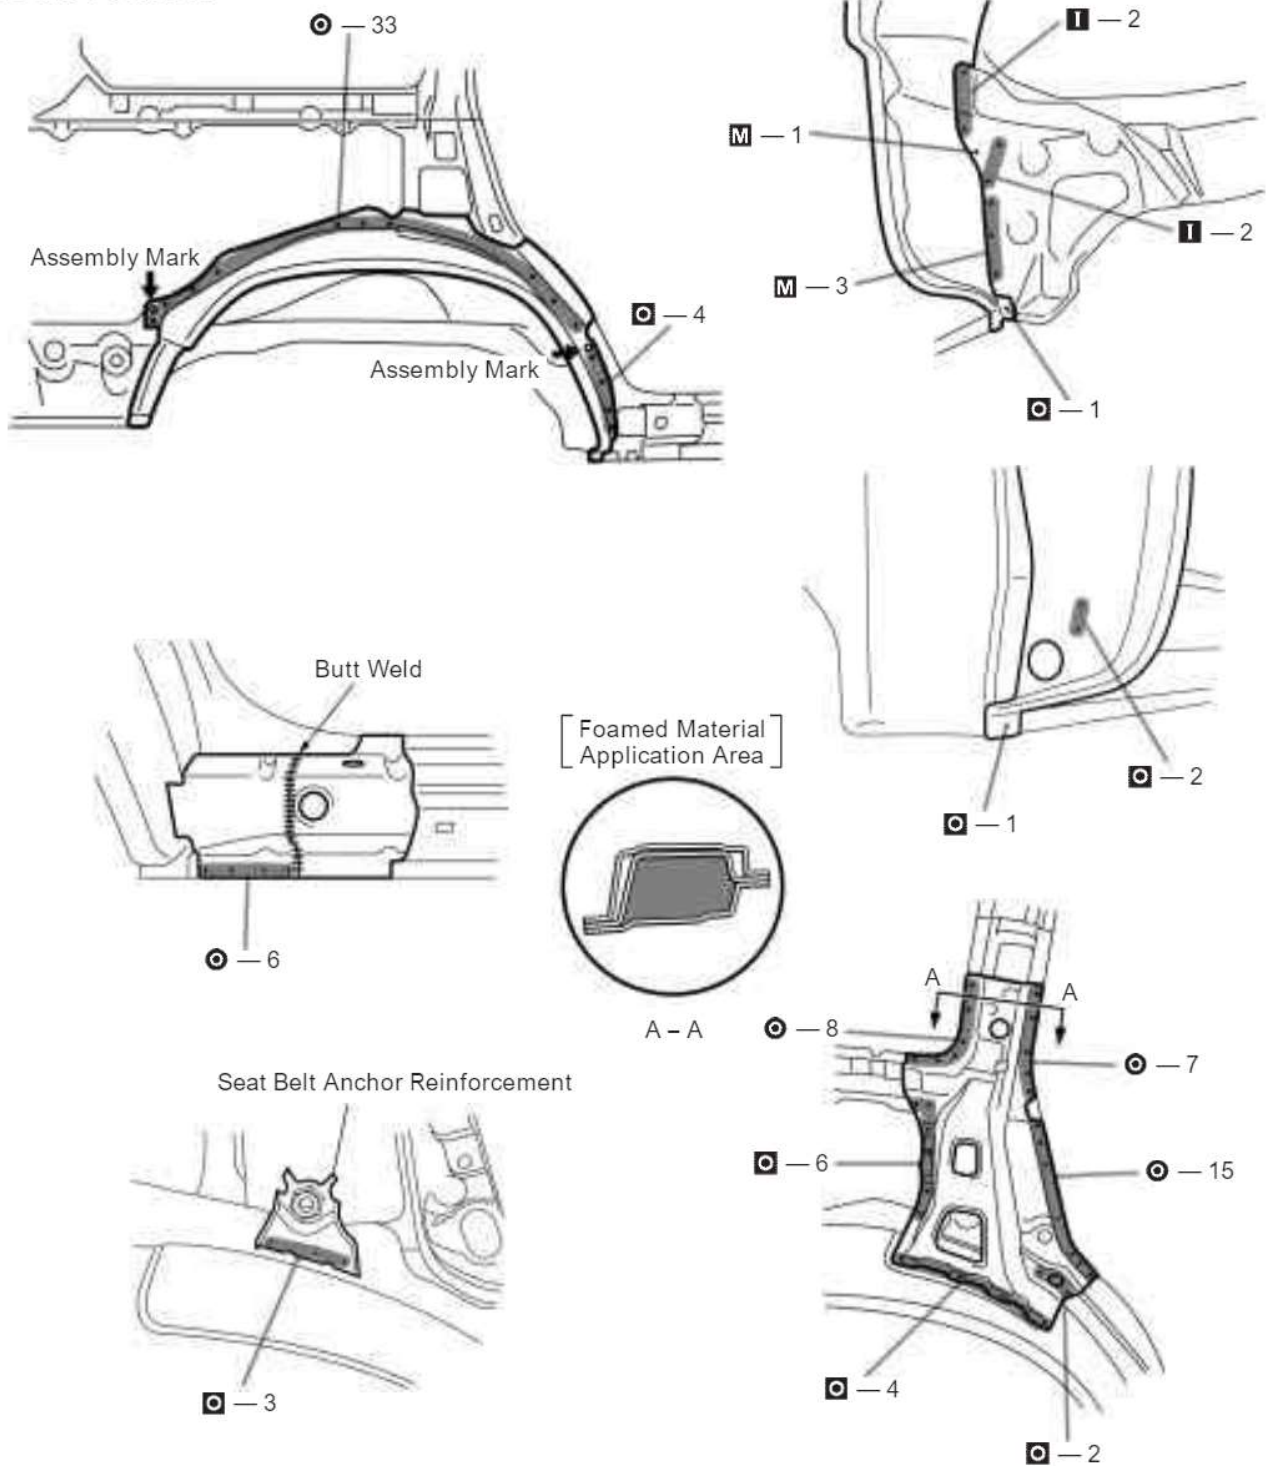


1. Determine the position of the new parts by the assembly marks of the inner and outer panels.
2. Before welding the new parts, temporarily install the quarter panel and check the fit.
3. After installing the new parts, apply foamed materials.


RE-34

BODY PANEL REPLACEMENT

QUARTER WHEEL HOUSING OUTER PANEL (ASSY): Left Side

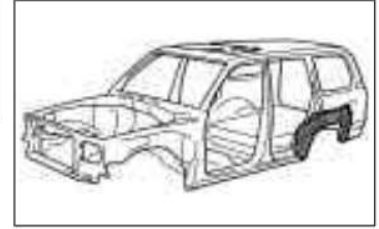

REMOVAL (With the quarter panel removed.)

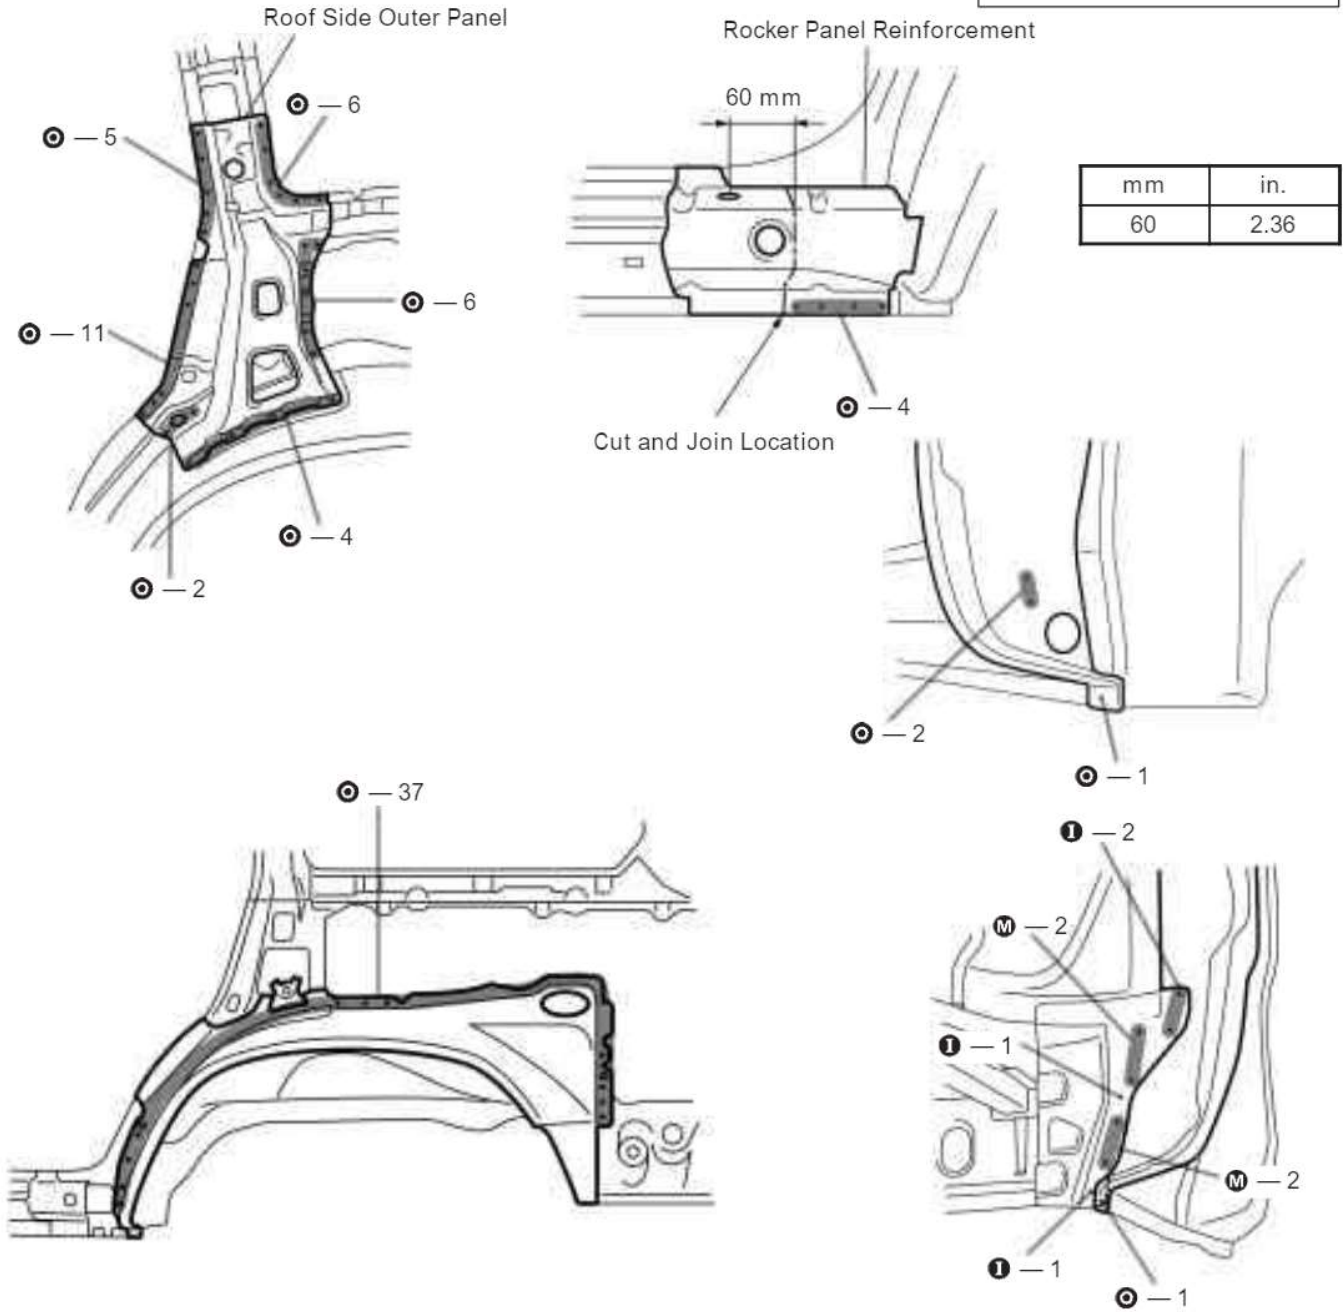


1. Cut and join the rocker panel reinforcement at the location as shown above.
2. After removing the roof side outer panel, remove the quarter wheel housing outer panel.

BODY PANEL REPLACEMENT


RE-35

INSTALLATION

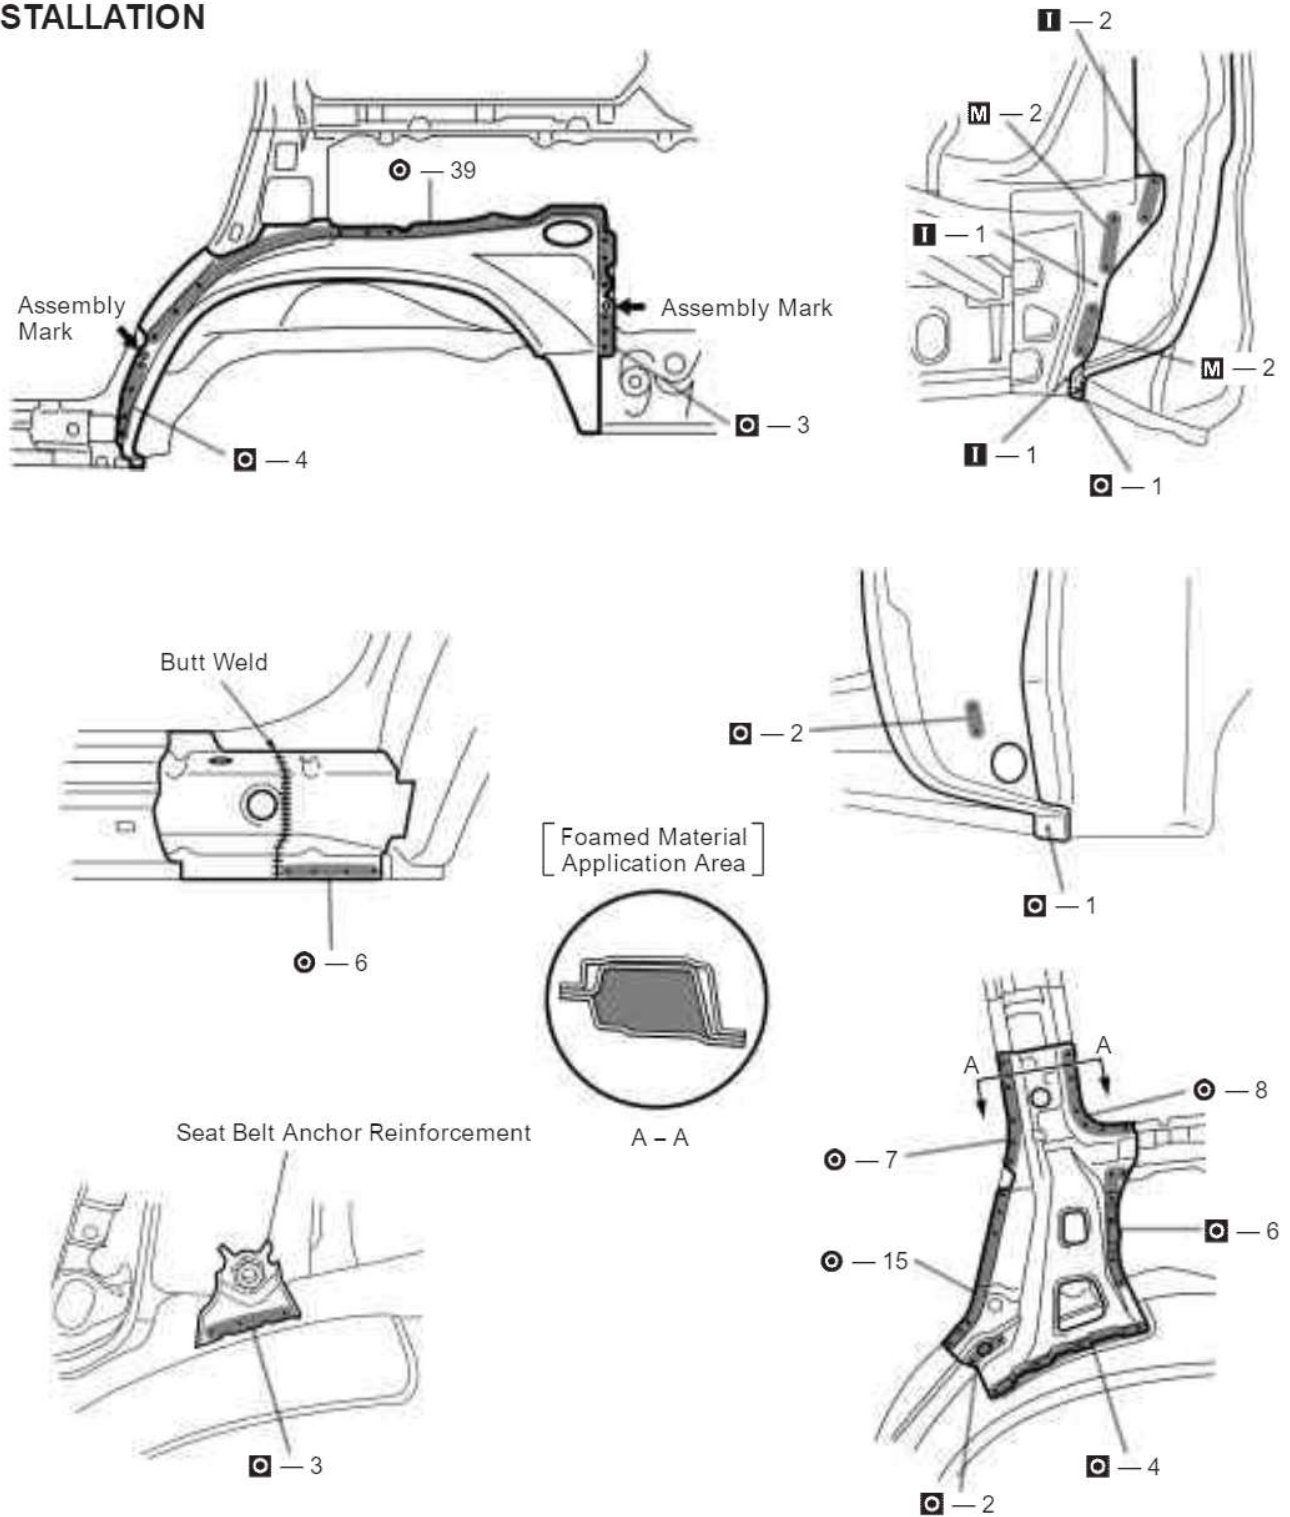


1. Determine the position of the new parts by the assembly marks of the inner and outer panels.
2. Before welding the new parts, temporarily install the quarter panel and check the fit.
3. After installing the new parts, apply foamed materials.


BACK DOOR OPENING REINFORCEMENT (ASSY)

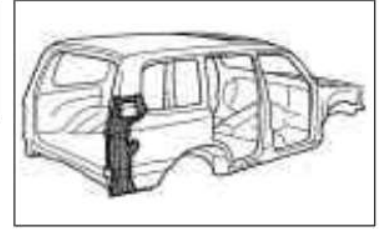

REMOVAL (With the quarter panel removed.)

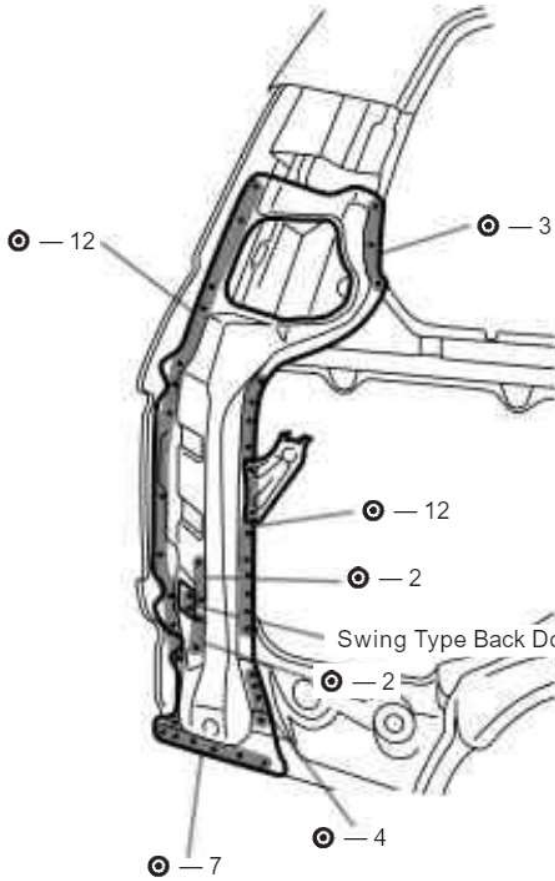


Back Door Type Spare Wheel Carrier (RH) Only: 1

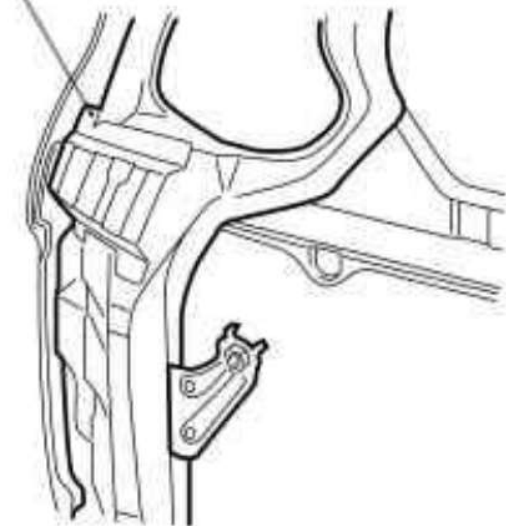

cardiagn.com


BODY PANEL REPLACEMENT

INSTALLATION

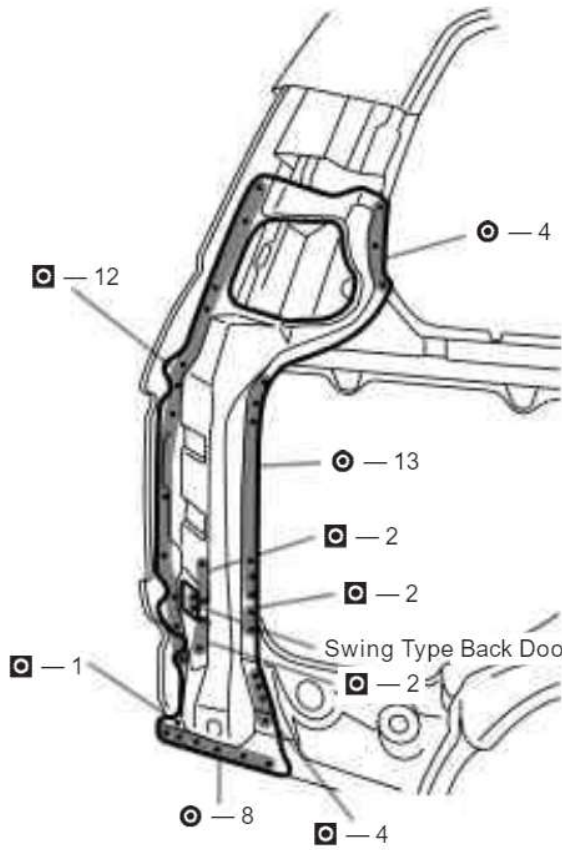

Swing Type Back Door Only: 2

Back Door Type Spare Wheel Carrier (RH) Only: 1



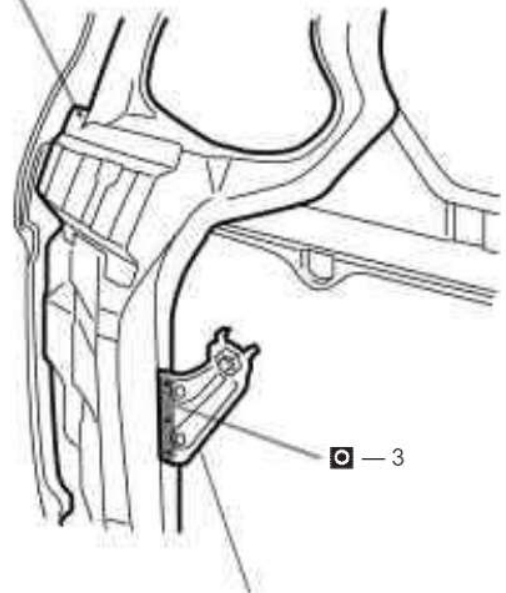


Seat Belt Anchor Reinforcement (3rd Seat Belt Only)

cardiagn.com

RE-38

BODY PANEL REPLACEMENT

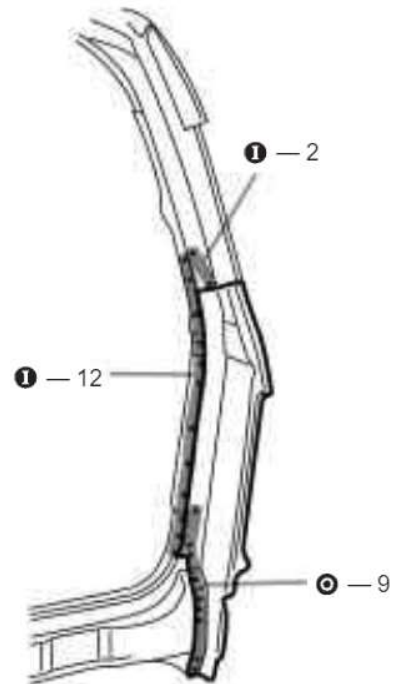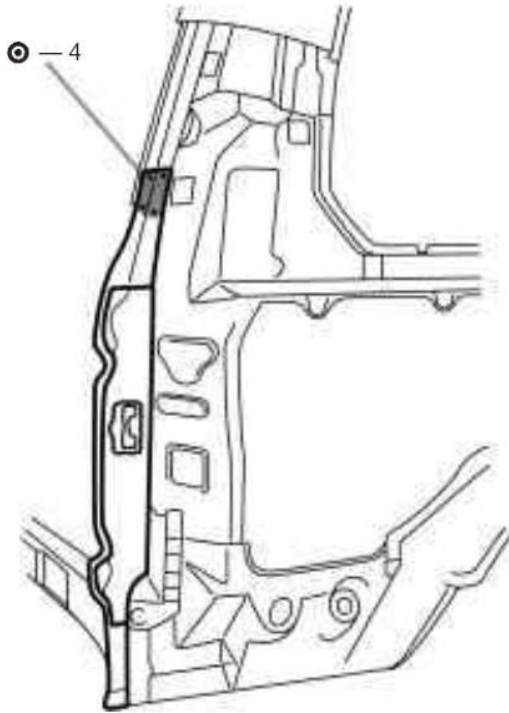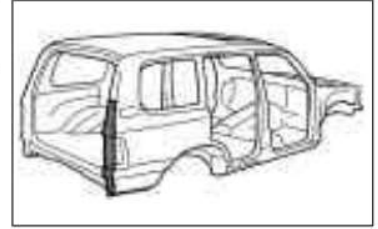
QUARTER PANEL REAR EXTENSION (ASSY)**REMOVAL (With the back door opening reinforcement removed.)**

cardiagn.com

BODY PANEL REPLACEMENT

RE-39



INSTALLATION

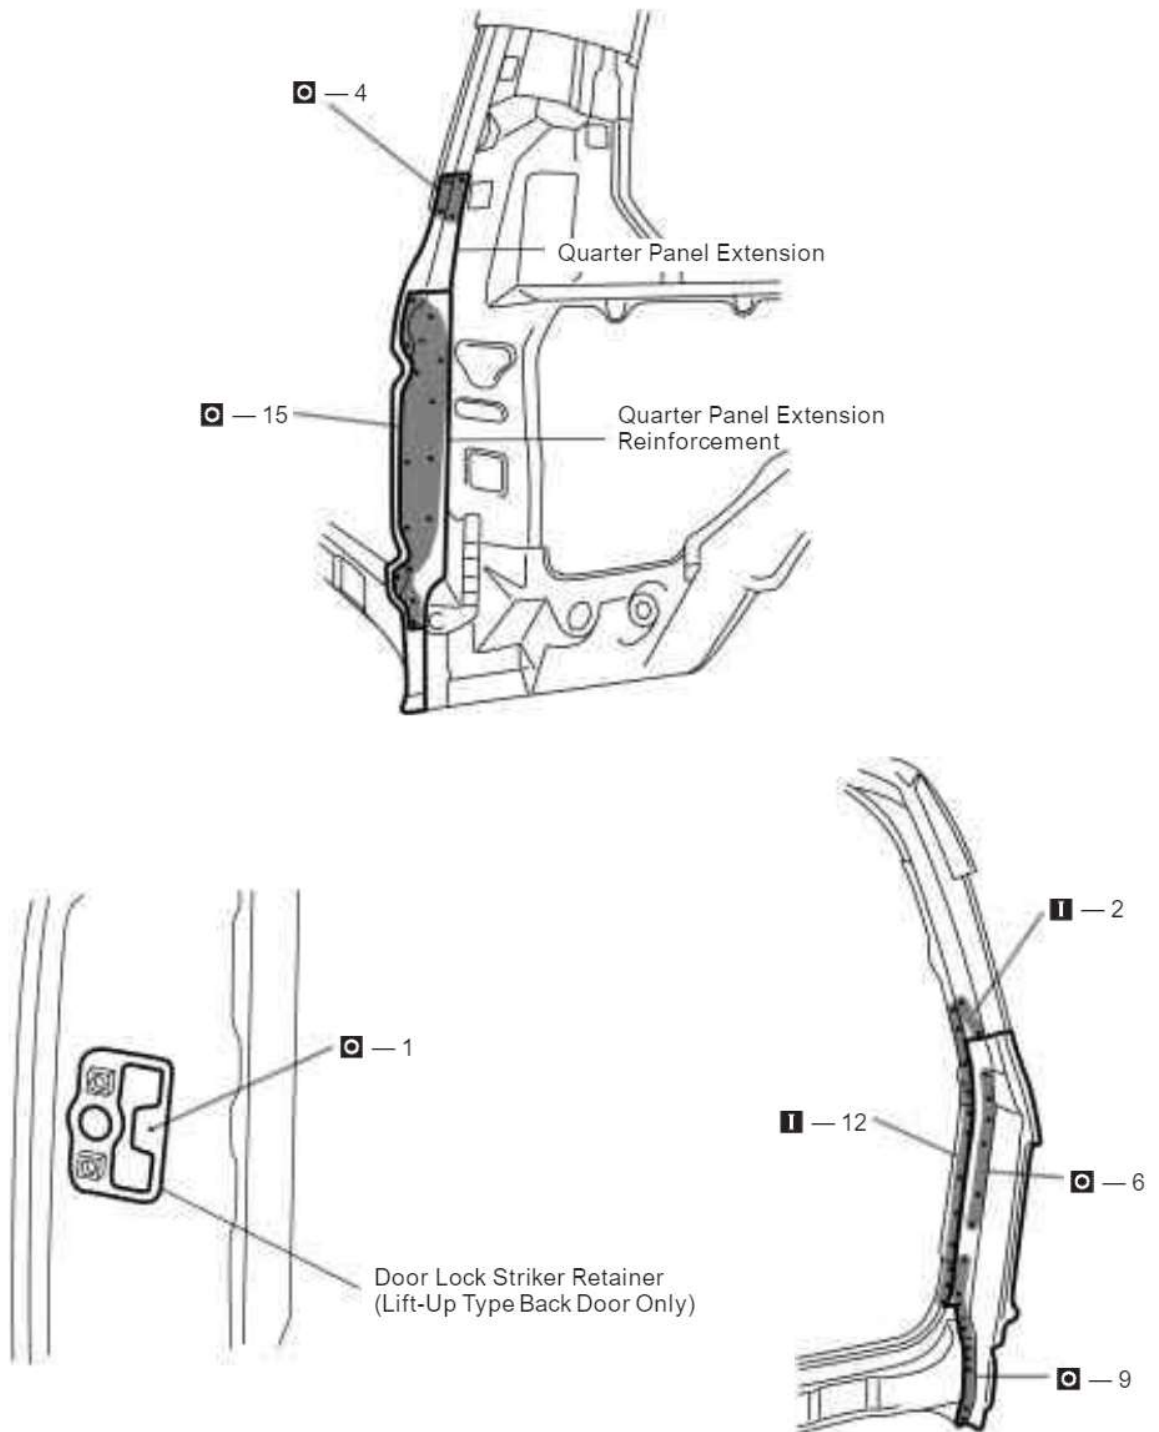

1. Before welding the new parts, temporarily install the back door opening reinforcement and check the fit.

RE-40

BODY PANEL REPLACEMENT

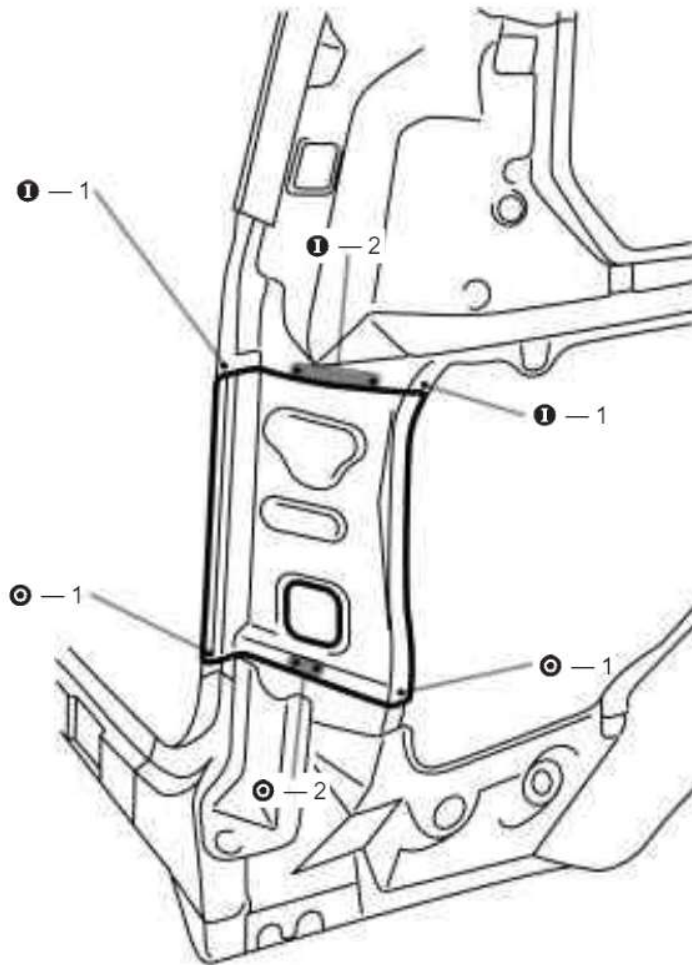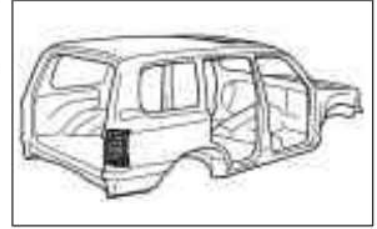
ROOF SIDE INNER REAR PANEL (ASSY)**REMOVAL (With the quarter panel rear extension removed.)**

cardiagn.com

BODY PANEL REPLACEMENT

RE-41



INSTALLATION

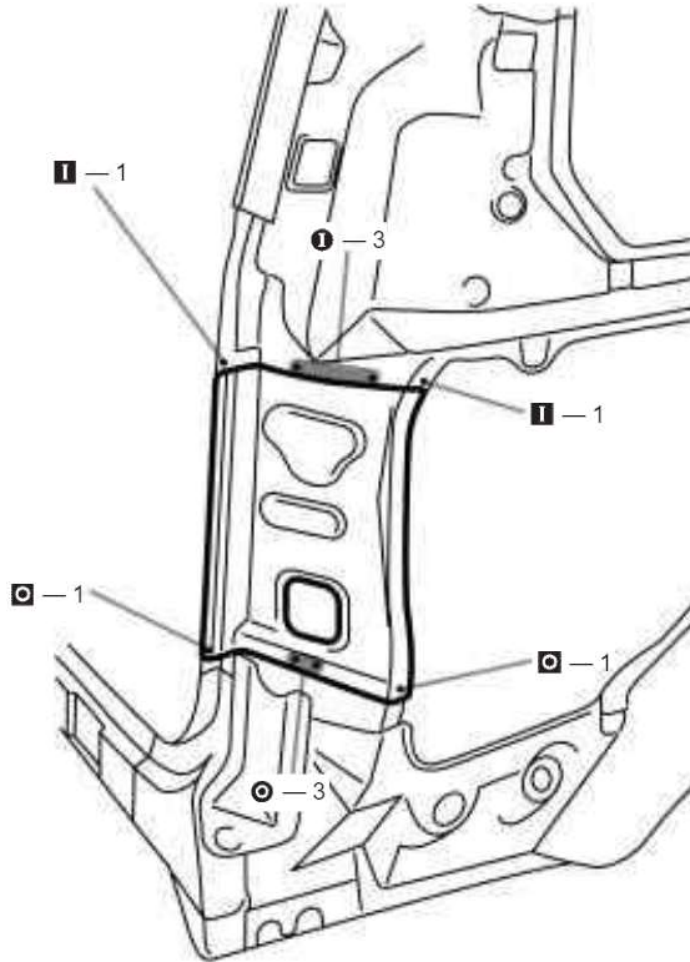

cardiagn.com

RE-42

BODY PANEL REPLACEMENT

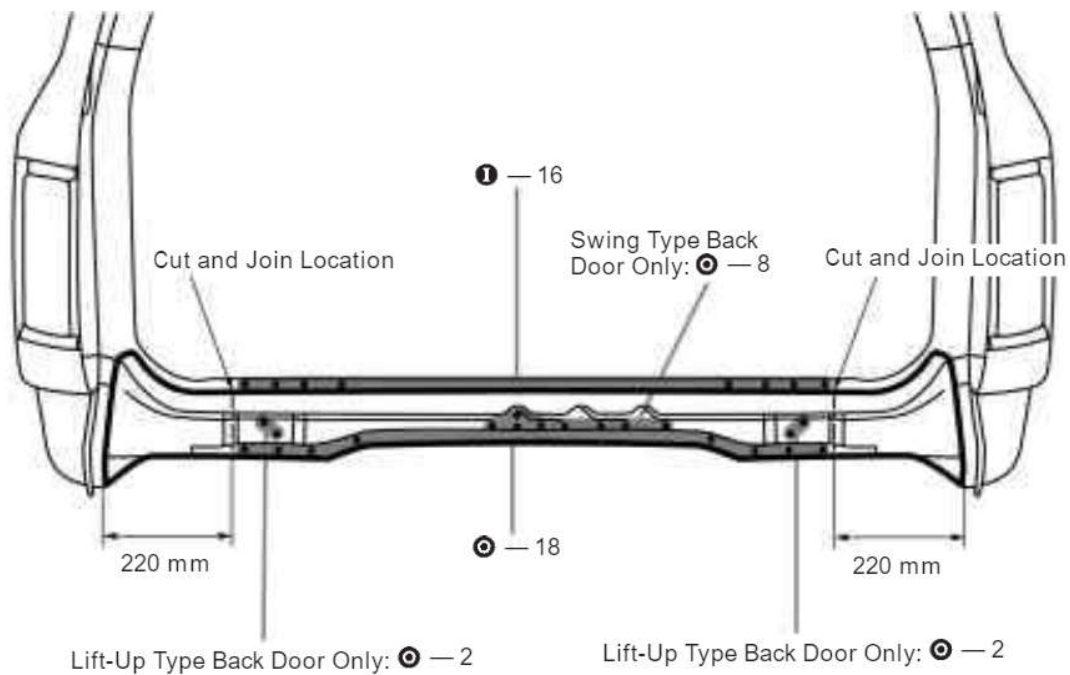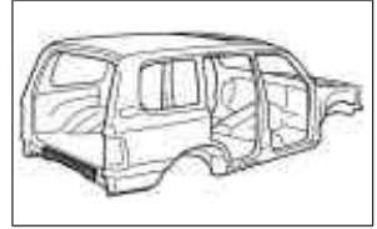BODY LOWER BACK OUTER PANEL (CUT)**REMOVAL**


mm	in.
220	8.66

1. Cut and join the parts at the locations as shown above.
2. Leave the body lower back inner panel to the vehicle side.

BODY PANEL REPLACEMENT

RE-43

INSTALLATION

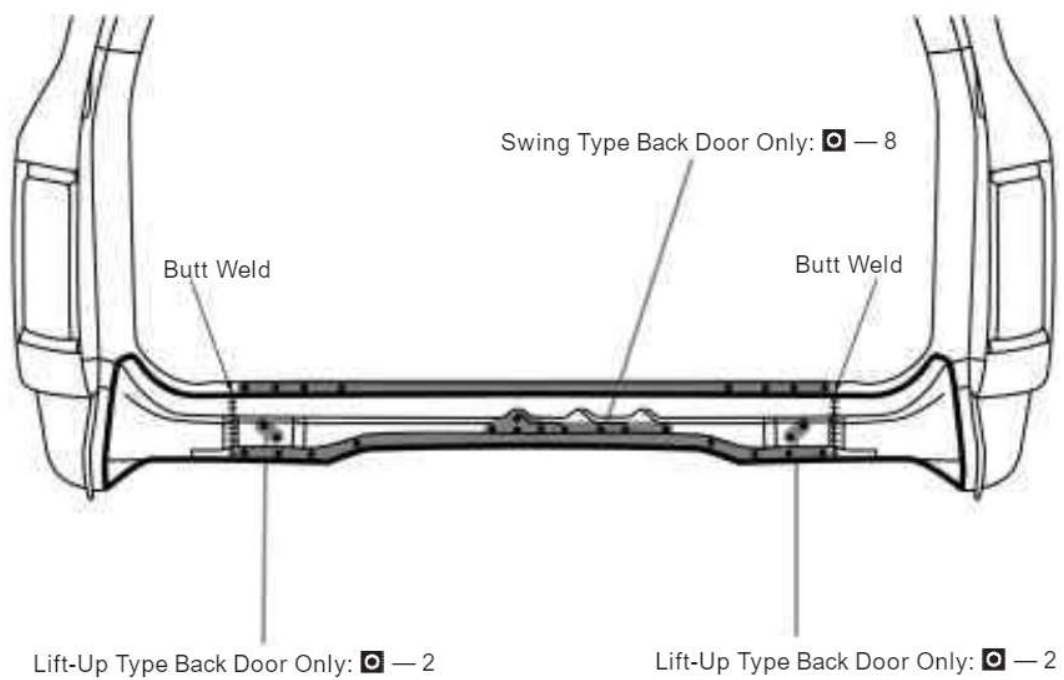




1. Temporarily install the new parts and check the fit of the tail gate or back door.

RE-44

BODY PANEL REPLACEMENT

BODY LOWER BACK OUTER PANEL (CUT)

REMOVAL (With the quarter panel rear extension removed.)

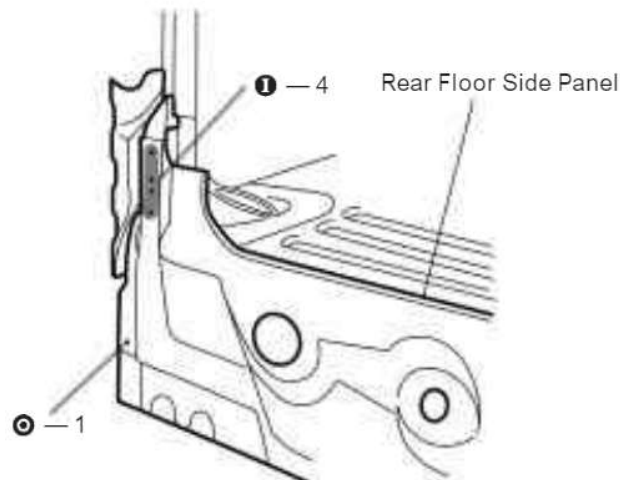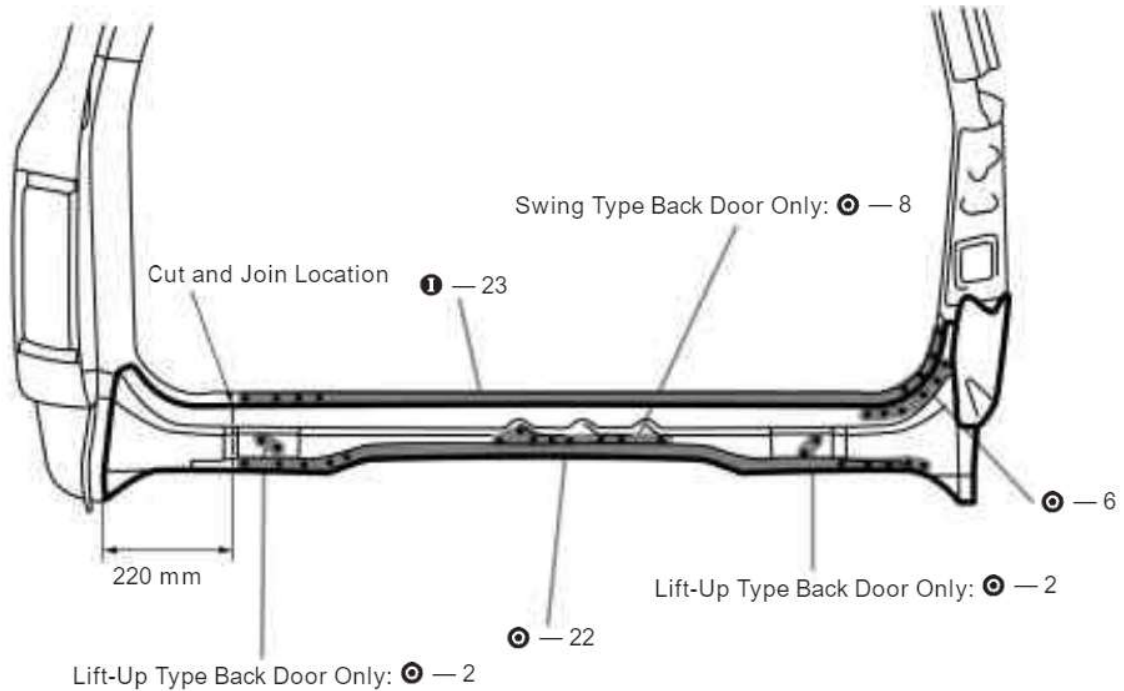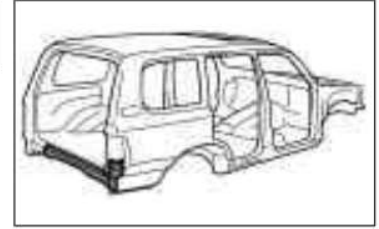


mm	in.
220	8.66

1. Cut and join the parts at the location as shown above.
2. Leave the body lower back inner panel and rear floor side panel to the vehicle side and remove the body lower back outer panel.

BODY PANEL REPLACEMENT

INSTALLATION

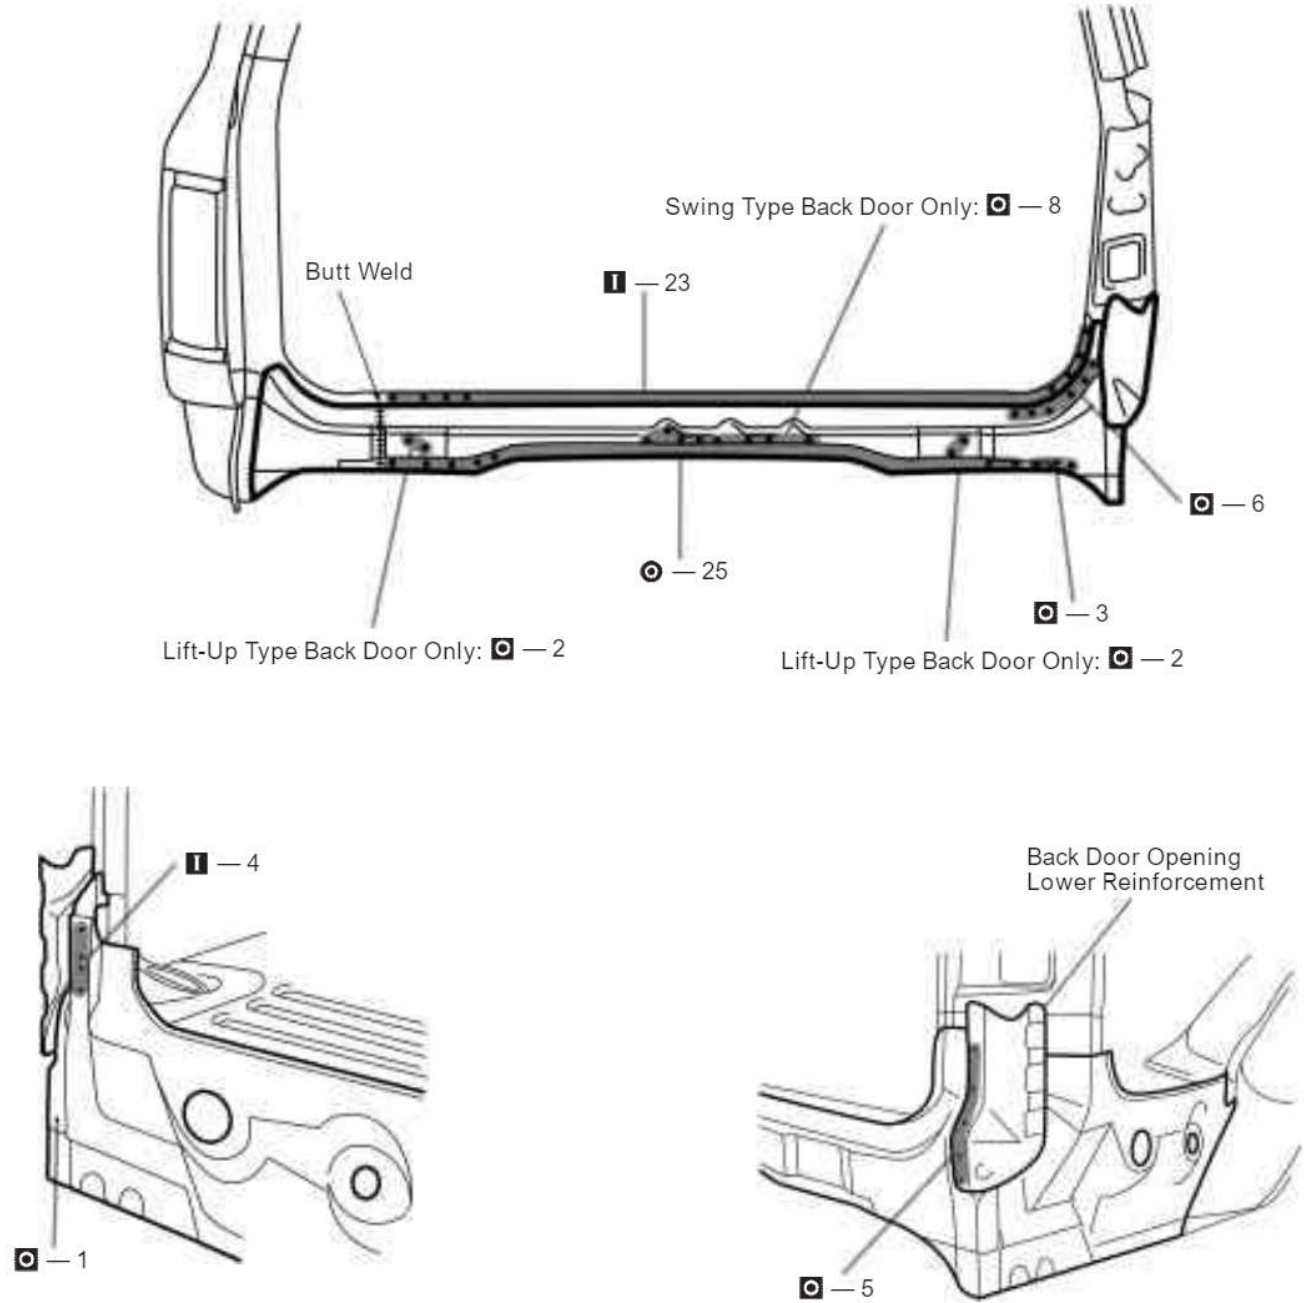


cardiagn.com



RE-46

BODY PANEL REPLACEMENT

BODY LOWER BACK PANEL (CUT)

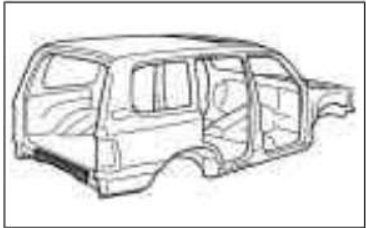

REMOVAL

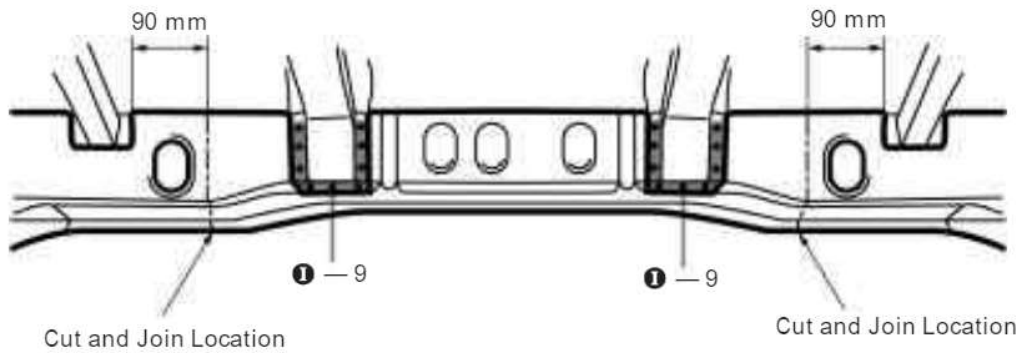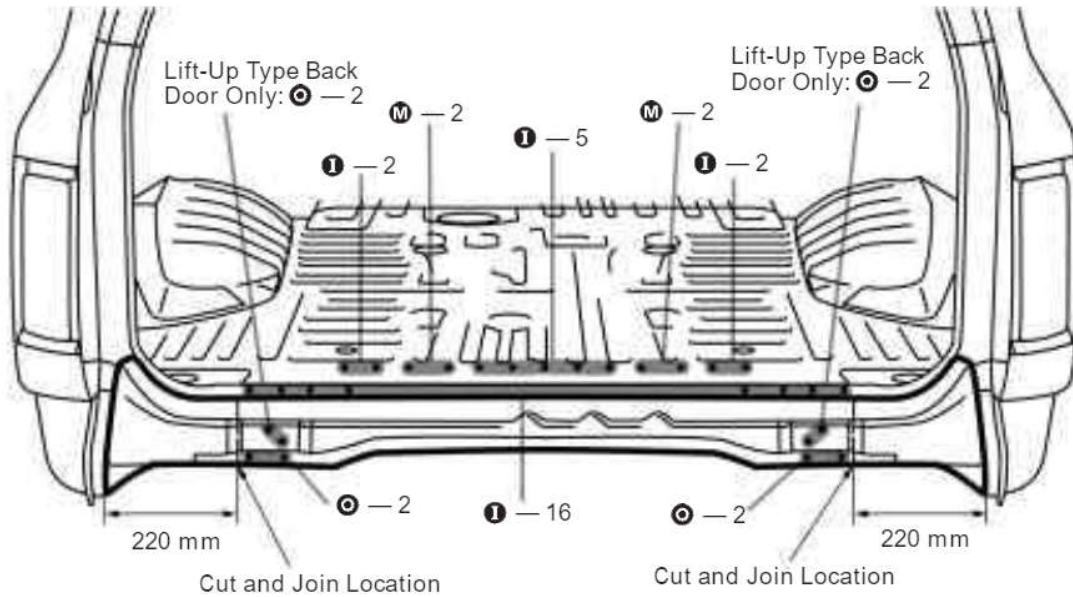

1. Cut and join the parts at the locations as shown above.


mm	in.
220	8.66
90	3.54

cardiagn.com

BODY PANEL REPLACEMENT

RE-47

INSTALLATION

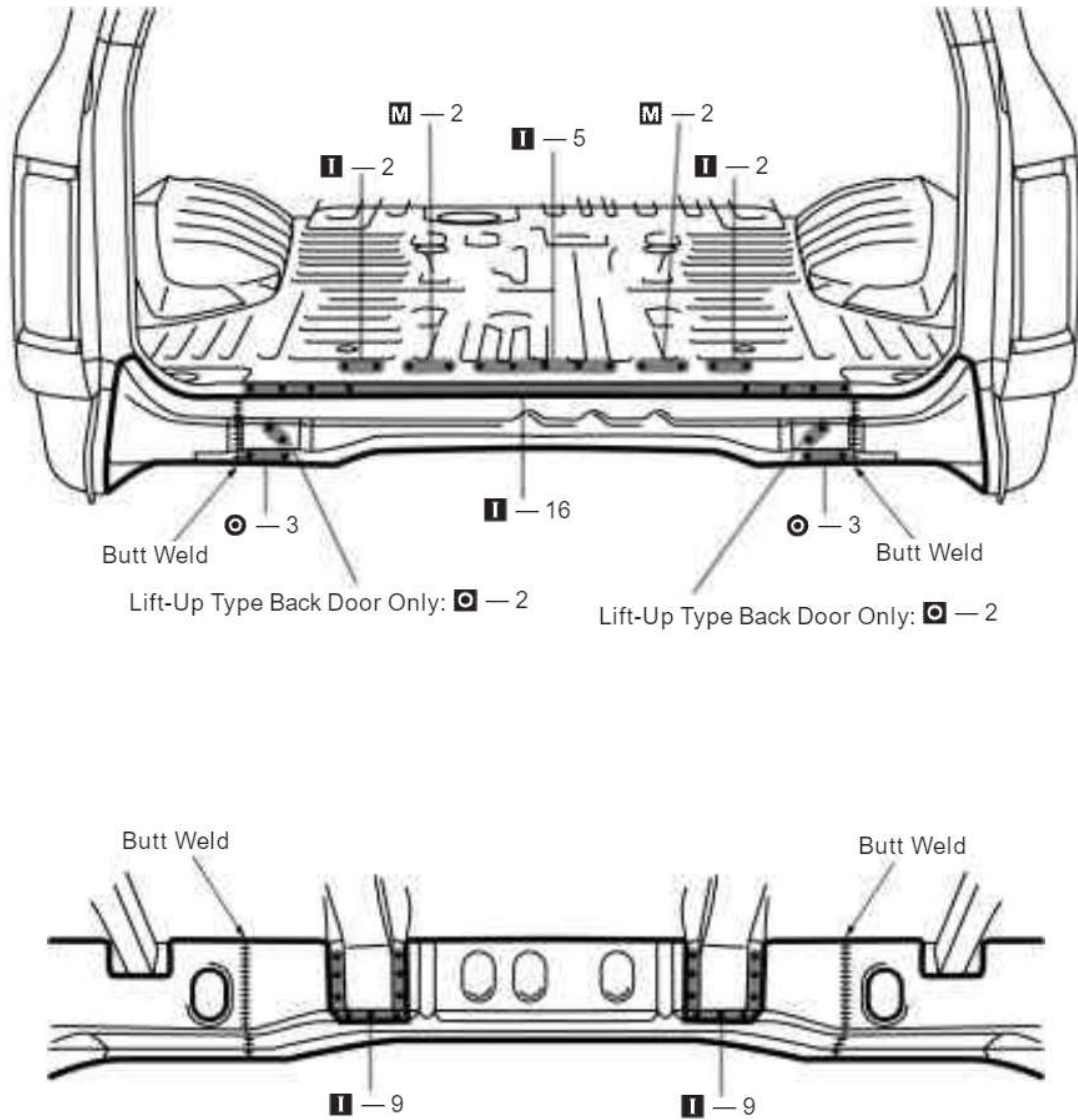


1. Temporarily install the new parts and check the fit of the tail gate or back door.



RE-48

BODY PANEL REPLACEMENT

BODY LOWER BACK PANEL (CUT)

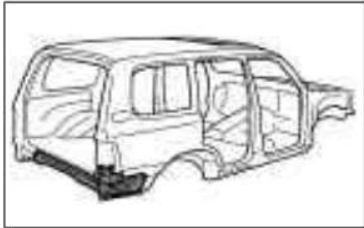

REMOVAL (With the quarter panel rear extension removed.)


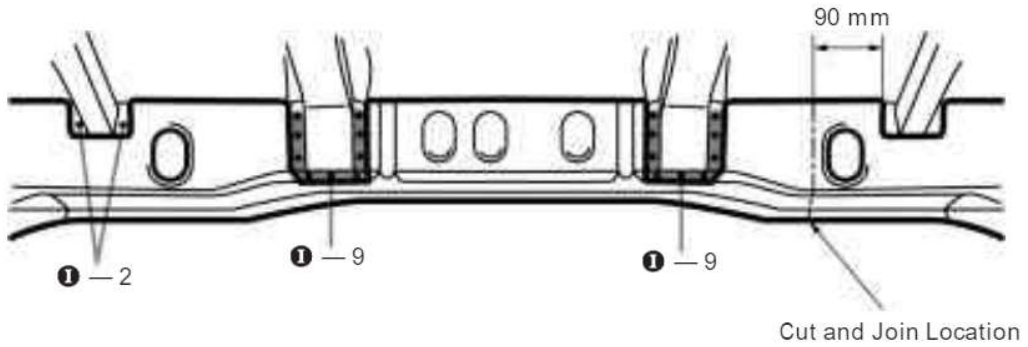
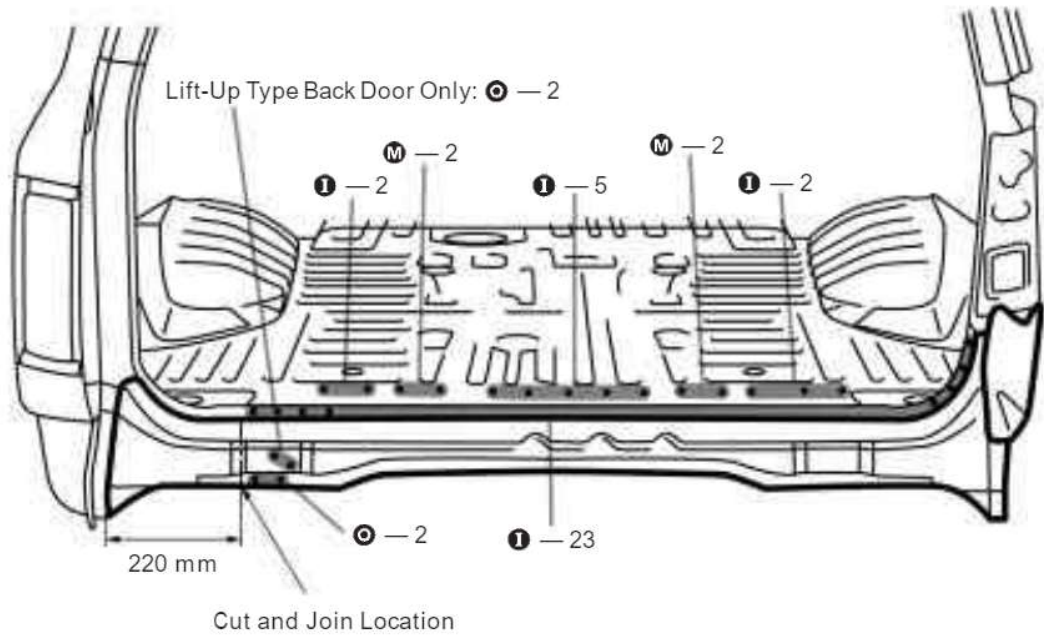


1. Cut and join the parts at the locations as shown above.

mm	in.
220	8.66
90	3.54

cardiagn.com

BODY PANEL REPLACEMENT

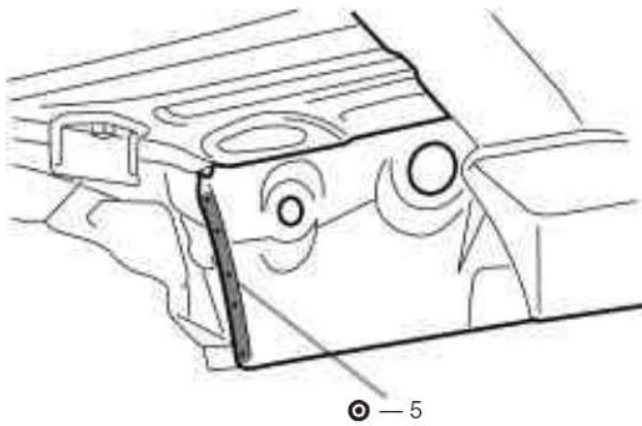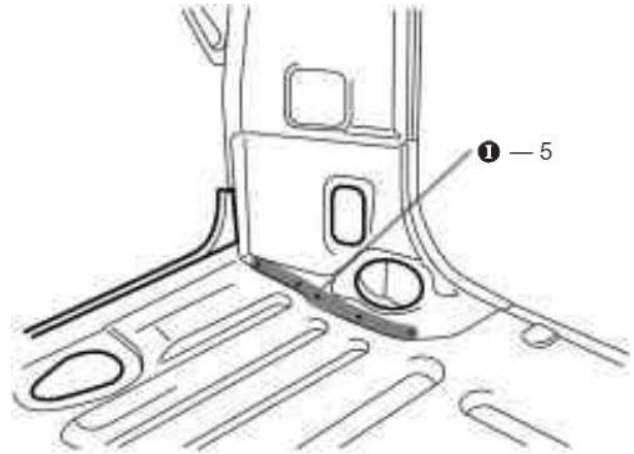
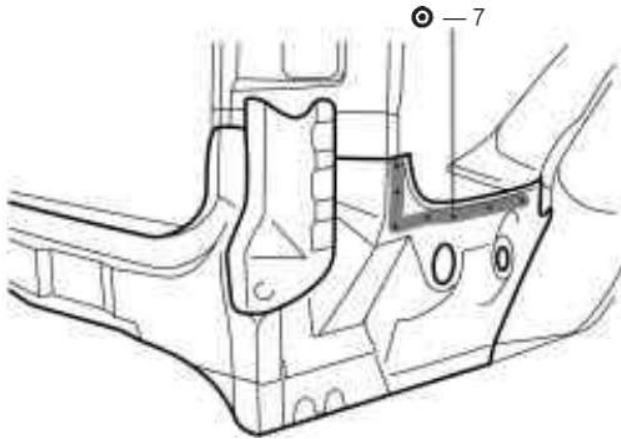


cardiagn.com

RE-50

BODY PANEL REPLACEMENT

INSTALLATION


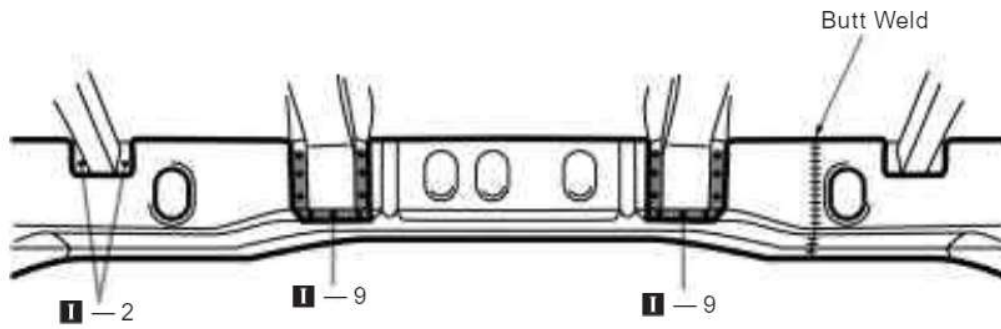
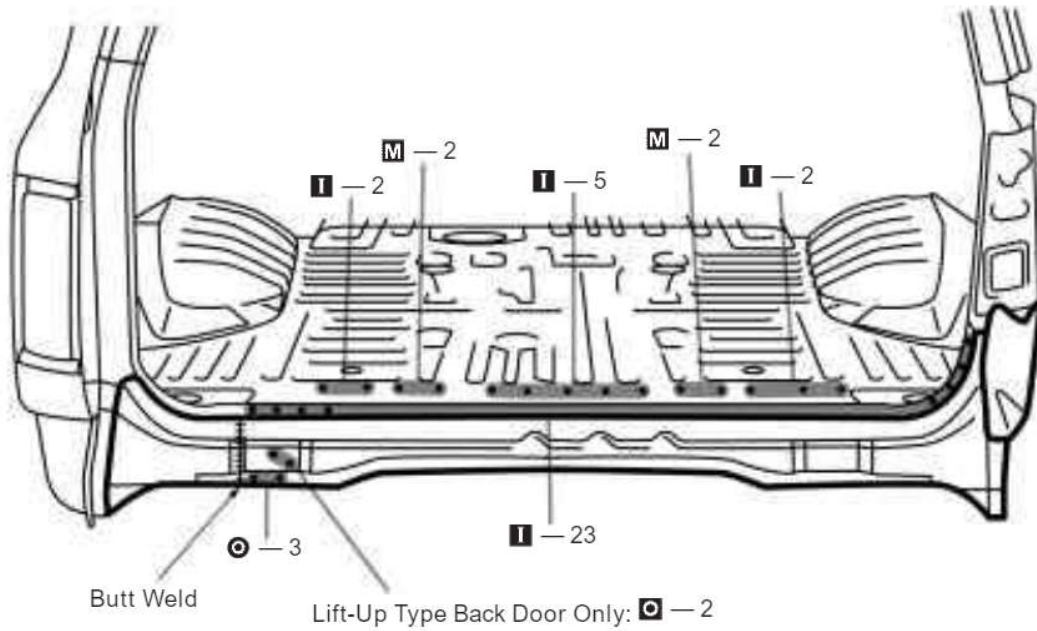


cardiagn.com

BODY PANEL REPLACEMENT

RE-51




Back Door Opening
Lower Reinforcement

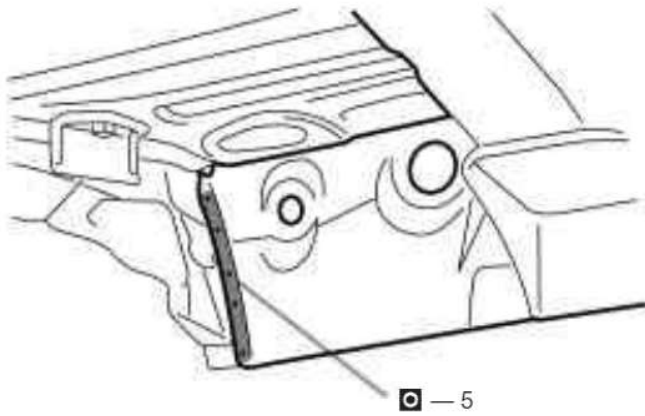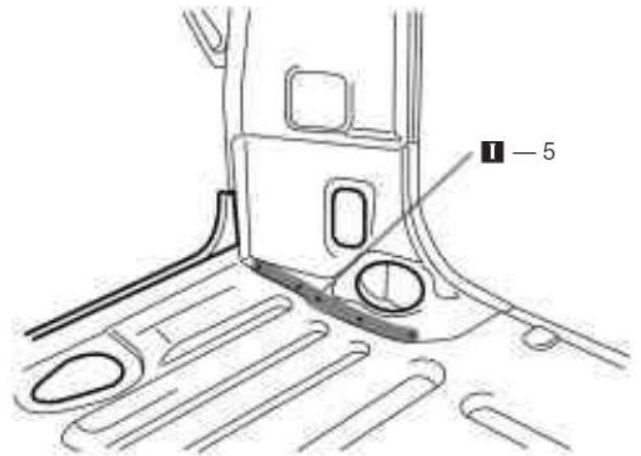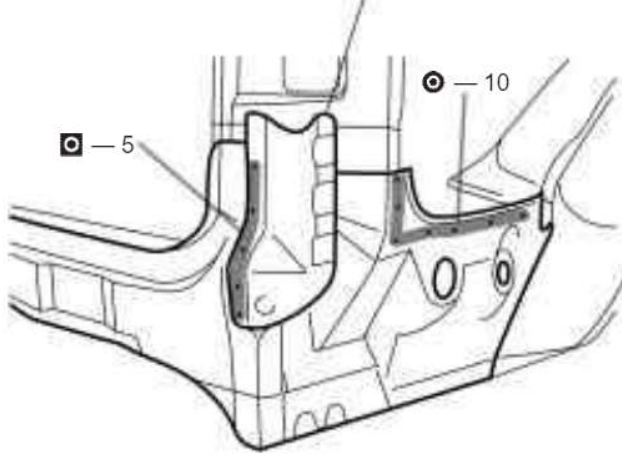

cardiagn.com

RE-52

BODY PANEL REPLACEMENT

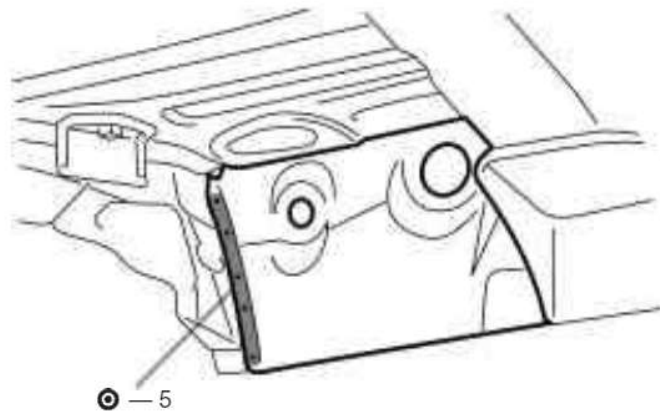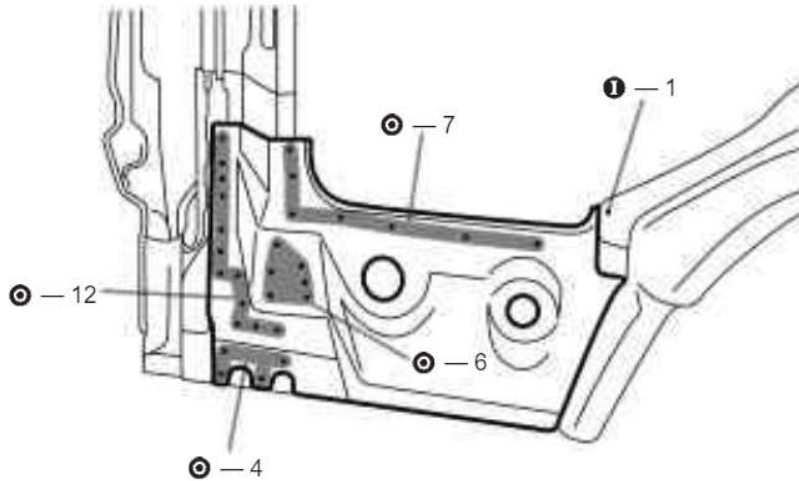
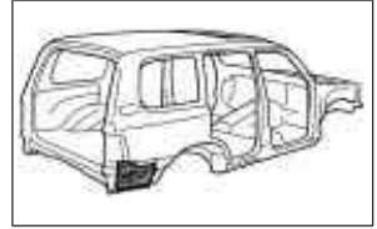
REAR FLOOR SIDE PANEL (ASSY): Right Side**REMOVAL** (With the back door opening reinforcement removed.)

cardiagn.com

BODY PANEL REPLACEMENT

RE-53

INSTALLATION

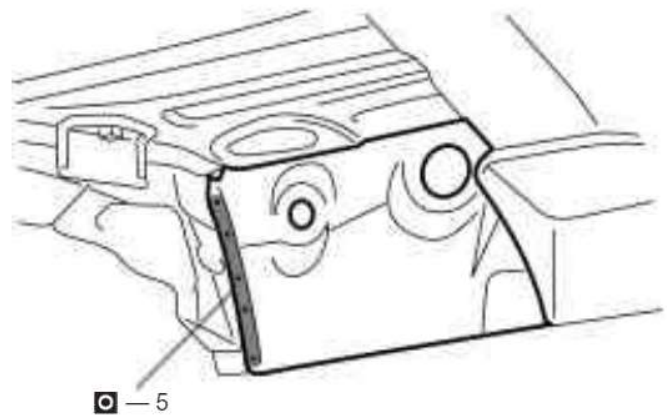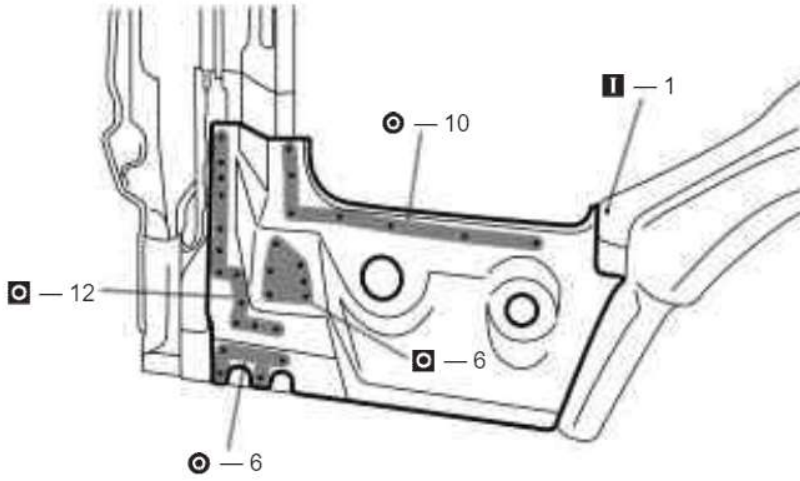

cardiagn.com



RE-54

BODY PANEL REPLACEMENT

REAR FLOOR SIDE PANEL (ASSY): Left Side



REMOVAL (With the back door opening reinforcement removed.)

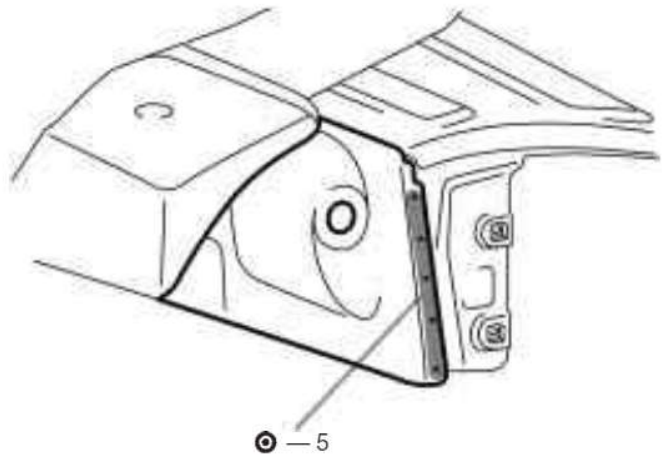
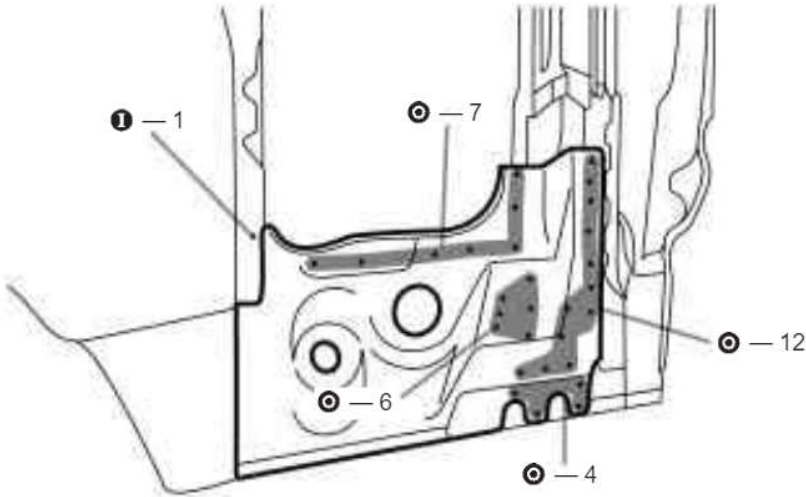


cardiagn.com

BODY PANEL REPLACEMENT

RE-55

INSTALLATION

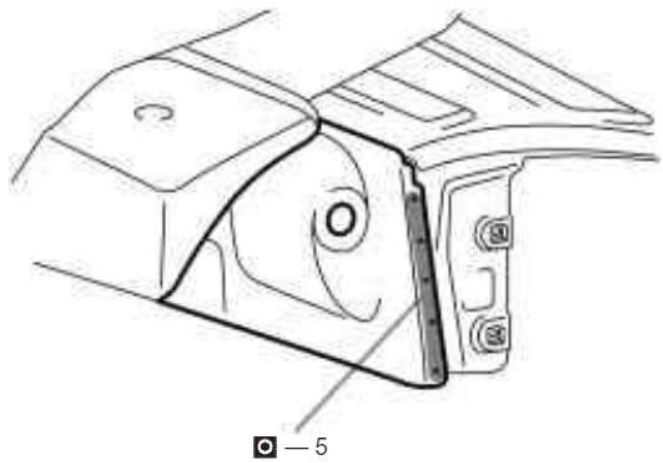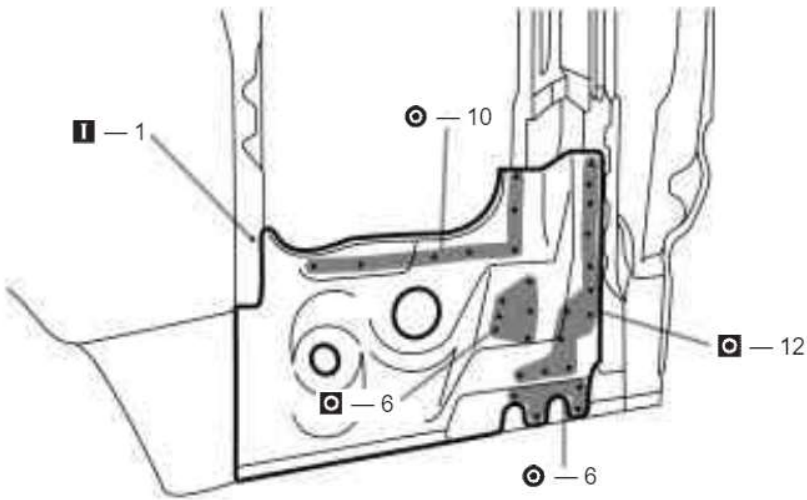


cardiagn.com


RE-56

BODY PANEL REPLACEMENT

LOWER BACK UPPER GUSSET (ASSY)

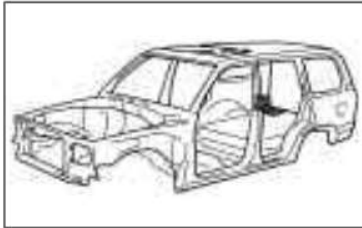

REMOVAL

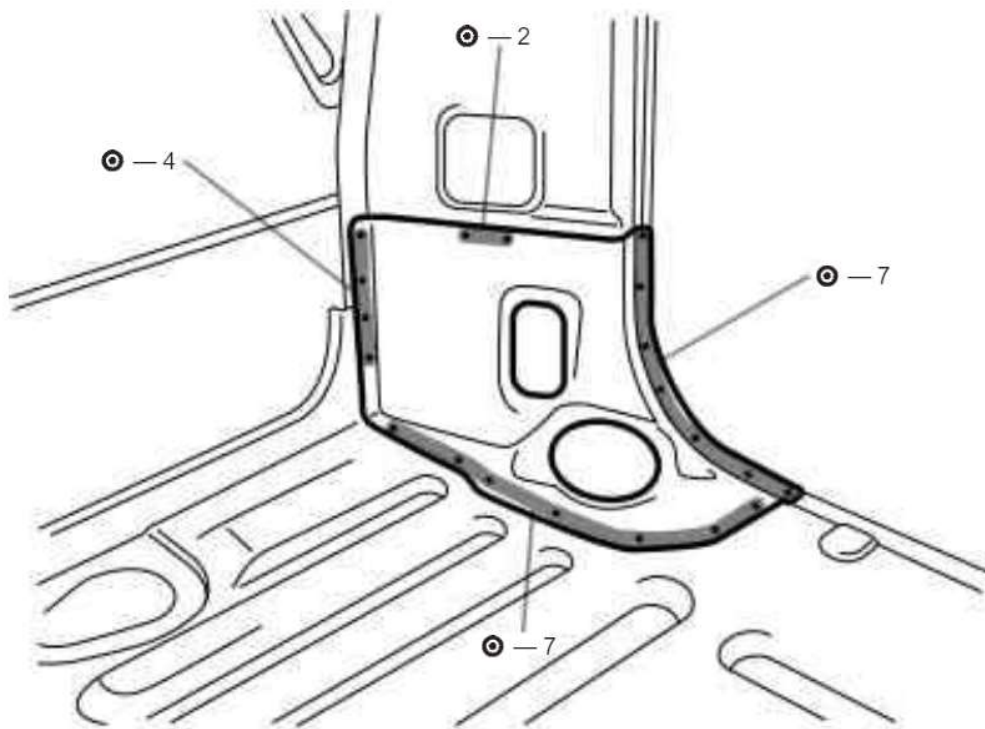


cardiagn.com

BODY PANEL REPLACEMENT

RE-57

INSTALLATION

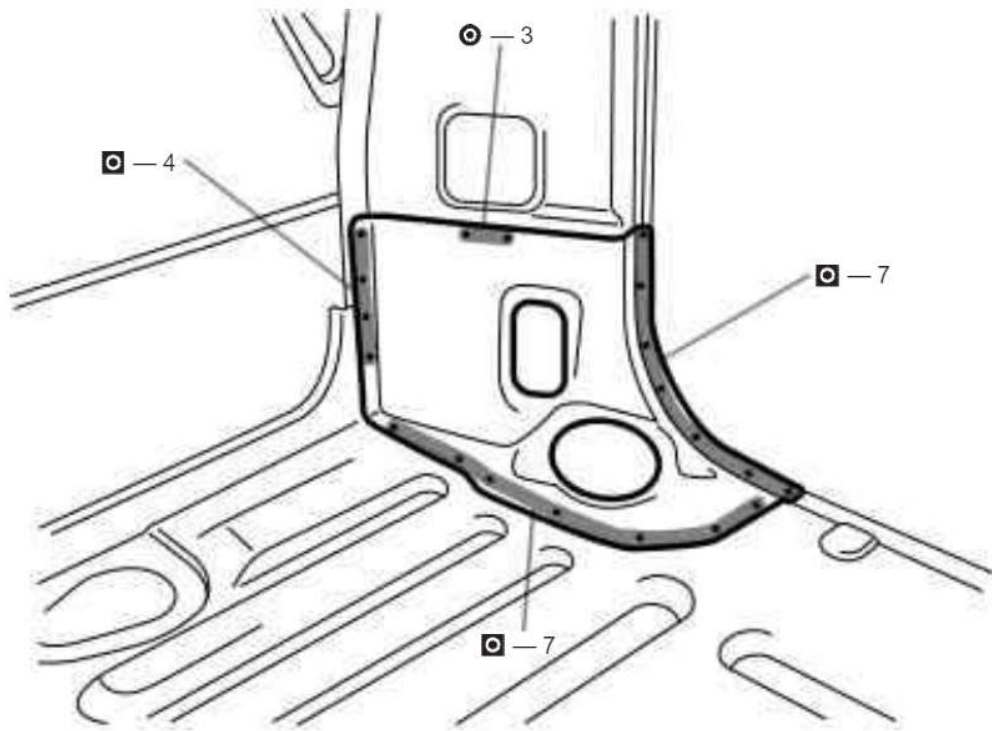



cardiagn.com

RE-58

BODY PANEL REPLACEMENT

REAR FLOOR PAN (CUT)




REMOVAL (With the body lower back panel, lower back upper gusset removed.)

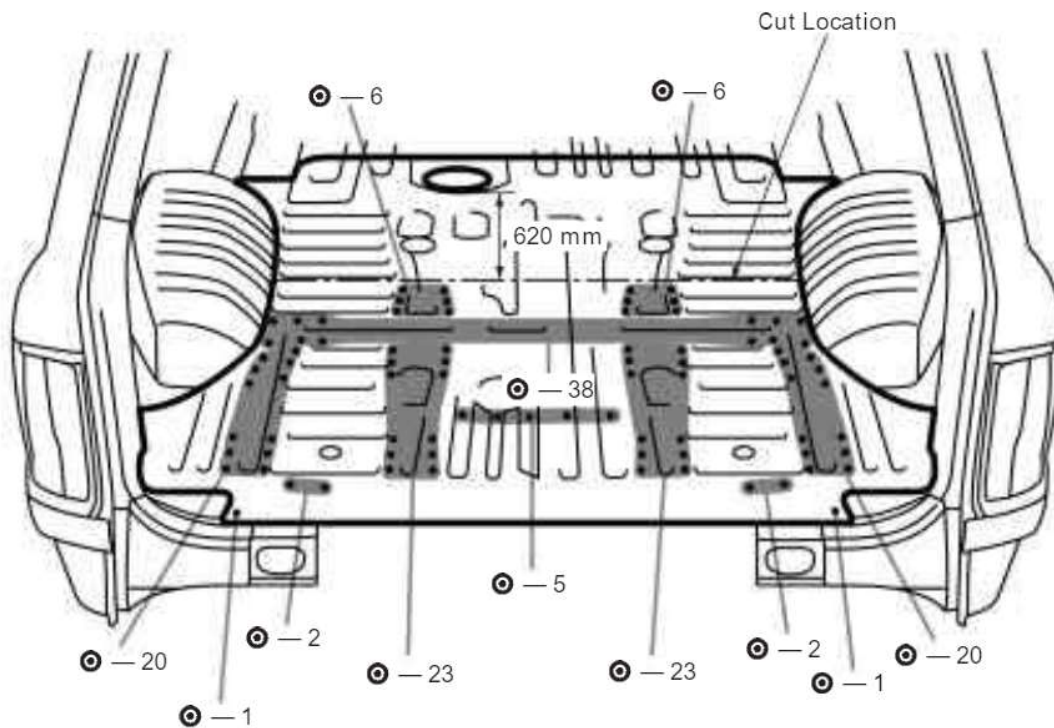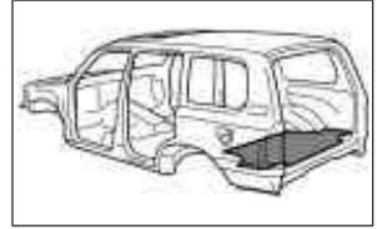

mm	in.
620	24.41

1. Cut the parts at the location as shown above.

BODY PANEL REPLACEMENT

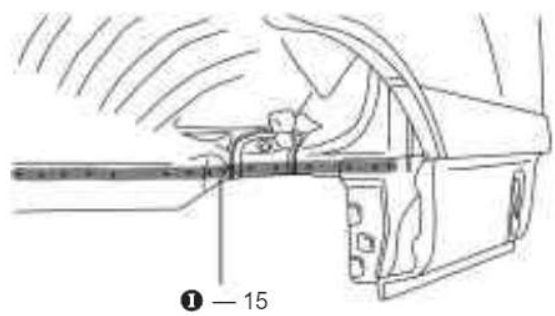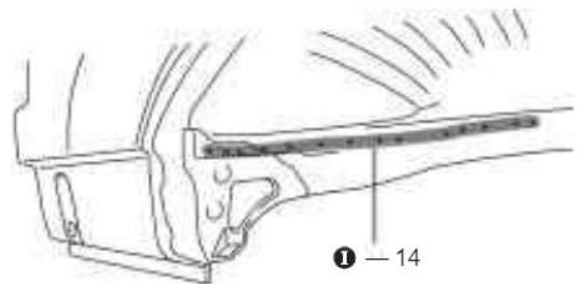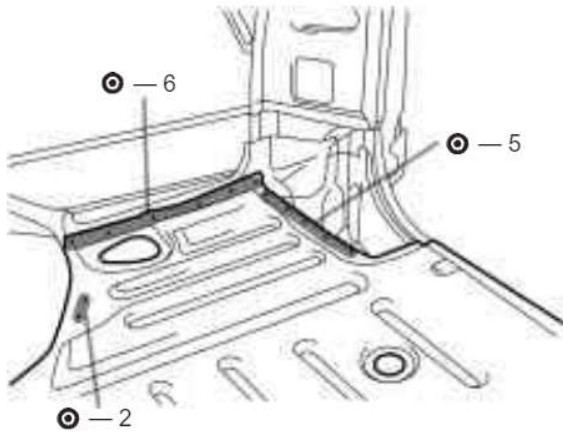


cardiagn.com


RE-60

BODY PANEL REPLACEMENT

INSTALLATION

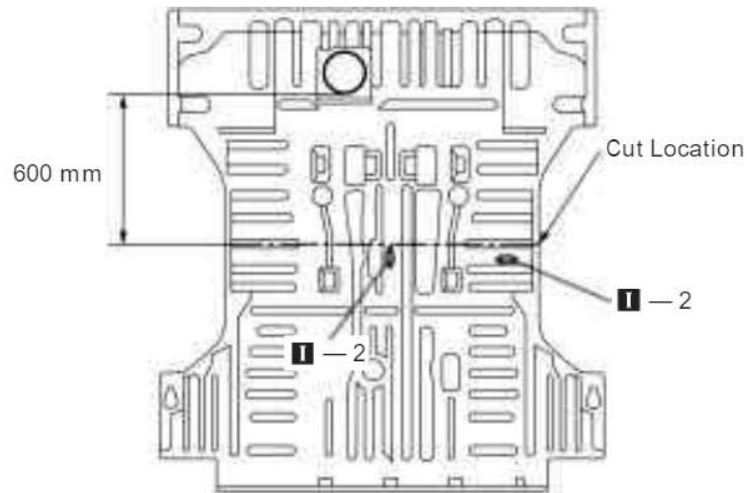




mm	in.
600	23.62

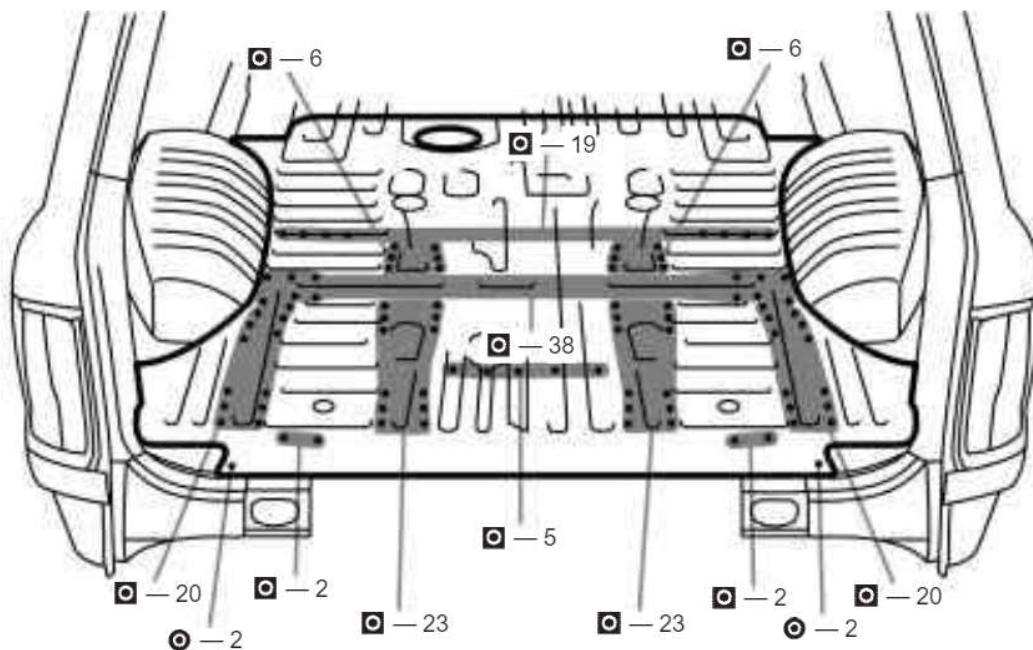

1. Cut the new parts at the location as shown above.
2. Plug weld the overlapping portion of the new parts.
3. Coat the overlapping opening portion from the both sides with body sealer.

HINT: Be sure the portion to be welded are align and not loose.




BODY PANEL REPLACEMENT

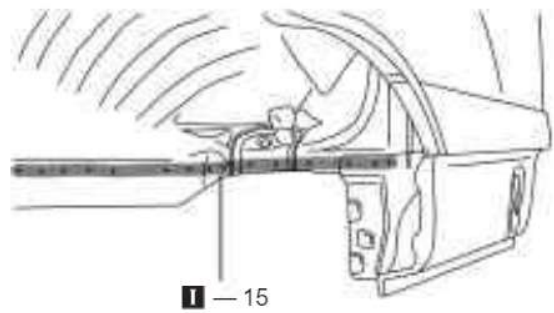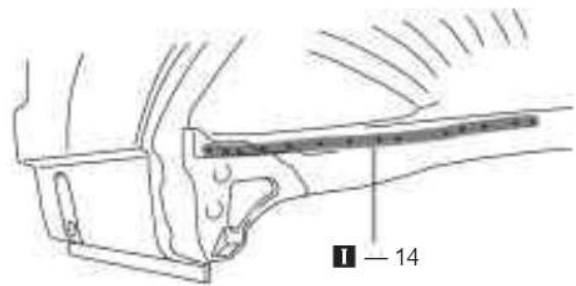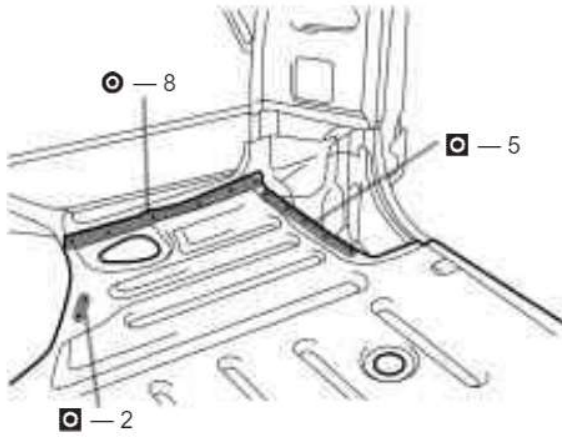

cardiagn.com

RE-62



BODY PANEL REPLACEMENT

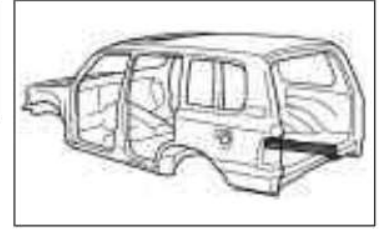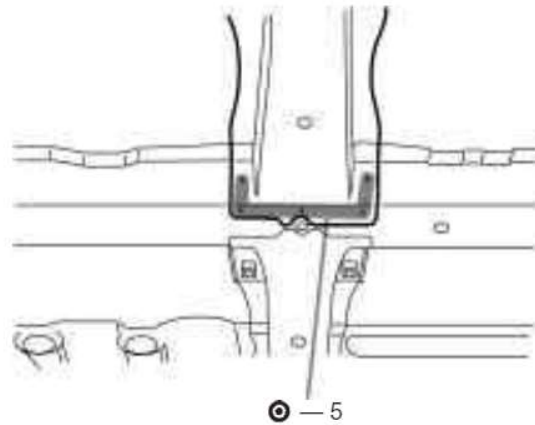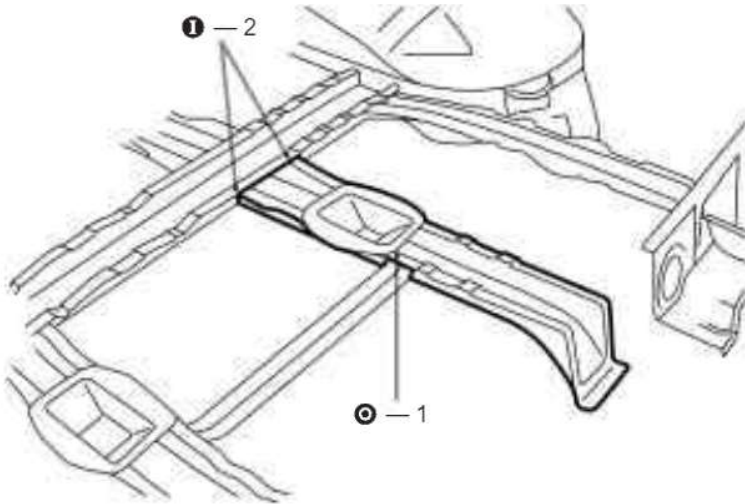**REAR FLOOR SIDE REAR CENTER MEMBER
(ASSY)****REMOVAL** (With the body lower back panel, rear floor pan removed.)

BODY PANEL REPLACEMENT

RE-63

INSTALLATION

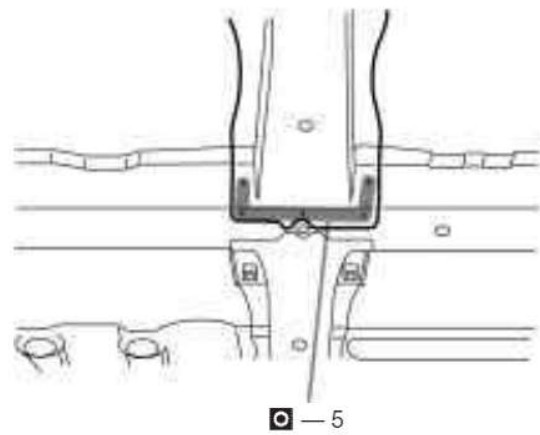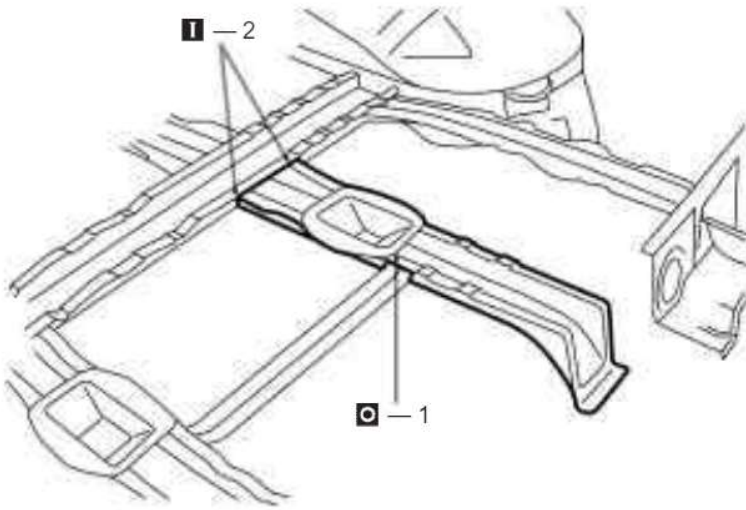

cardiagn.com




RE-64

BODY PANEL REPLACEMENT

REAR FLOOR No.3 CROSSMEMBER (ASSY)



REMOVAL (With the rear floor pan removed.)

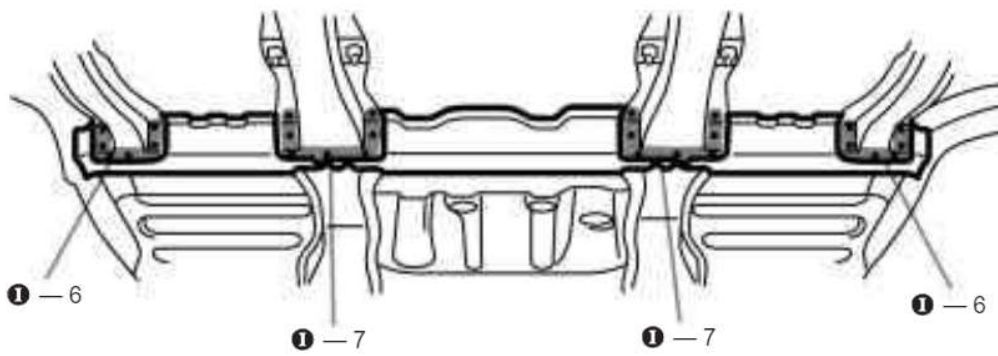
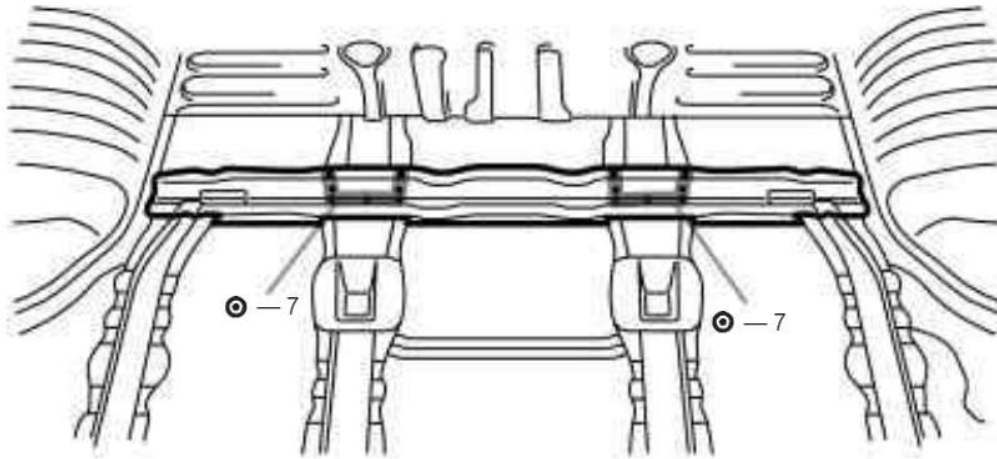
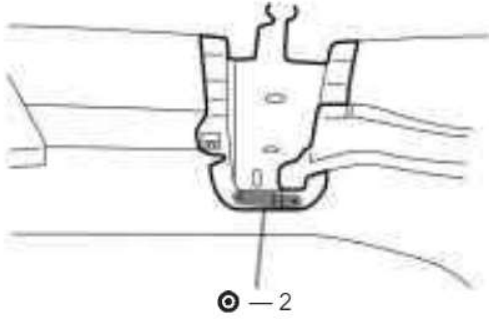


cardiagn.com

BODY PANEL REPLACEMENT

RE-65




INSTALLATION

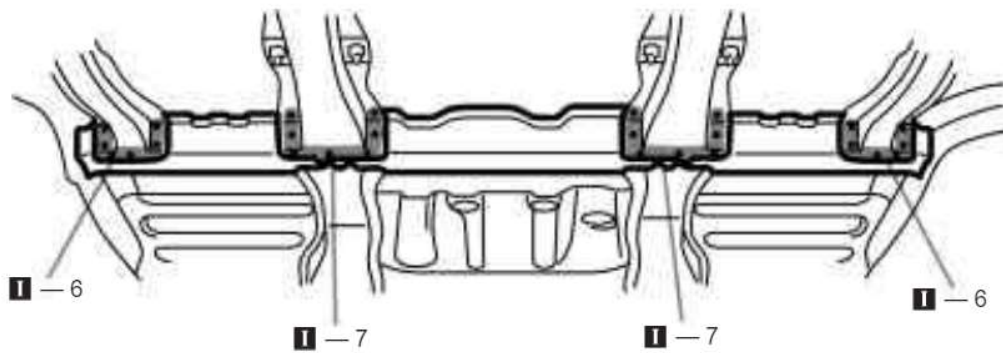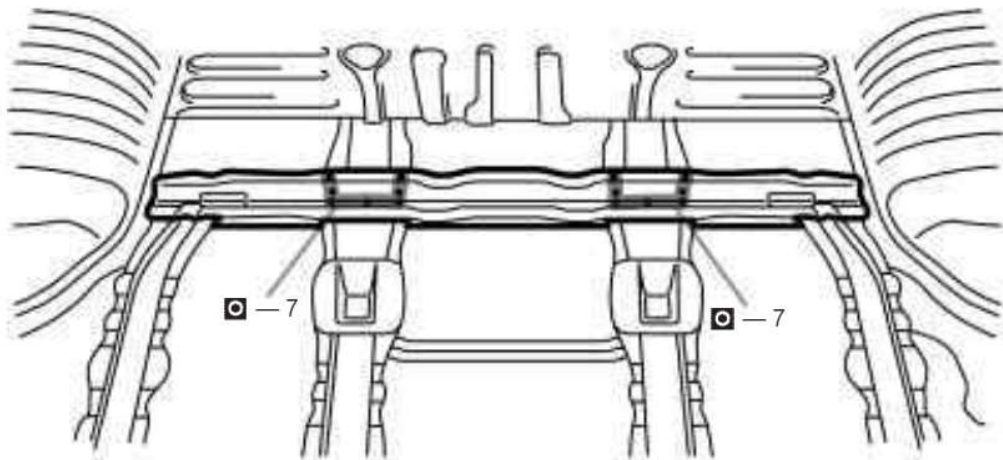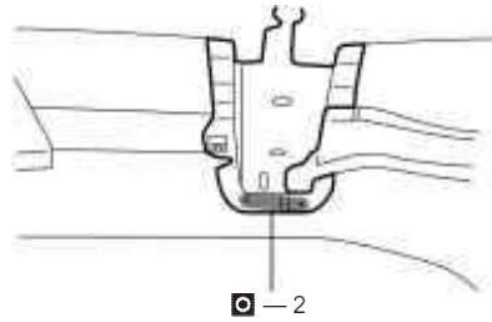

cardiagn.com

RE-66

BODY PANEL REPLACEMENT

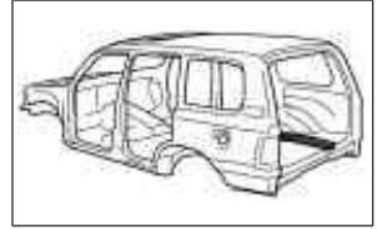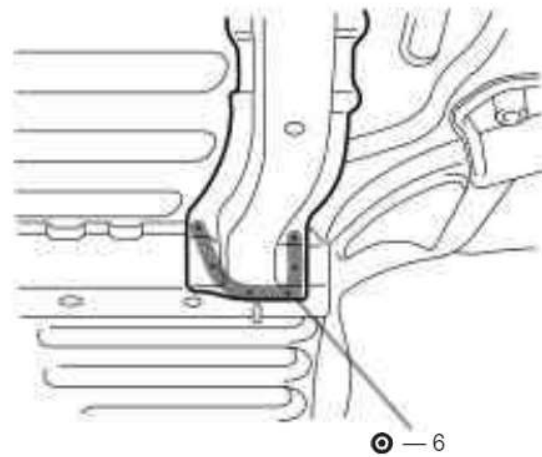
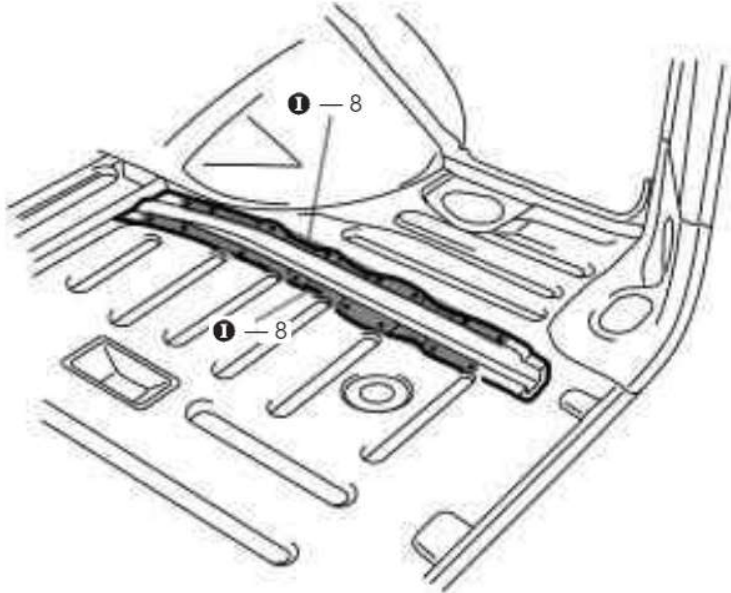
**REAR FLOOR SIDE MEMBER REAR No.2
REINFORCEMENT (ASSY)****REMOVAL (With the body lower back panel removed.)**

cardiagn.com

BODY PANEL REPLACEMENT

RE-67

INSTALLATION

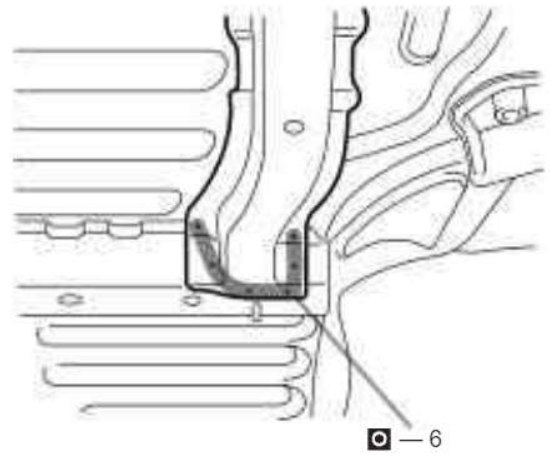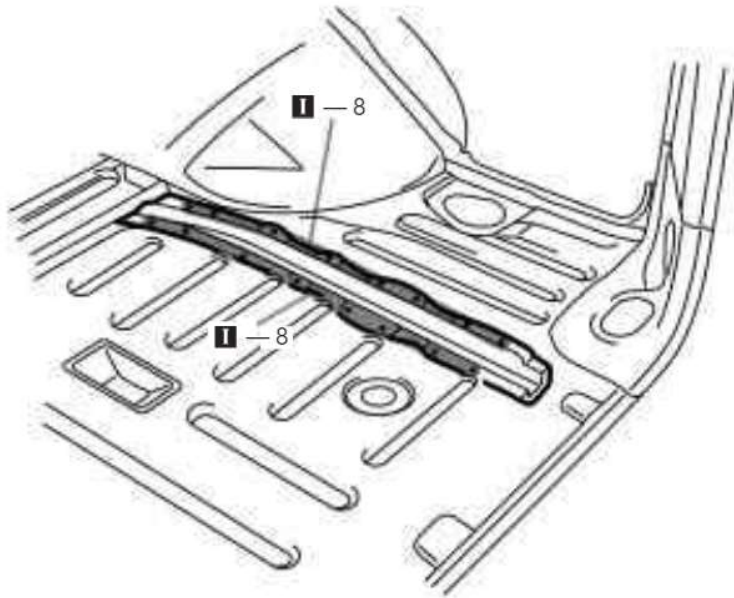


cardiagn.com



RE-68

BODY PANEL REPLACEMENT

ROOF PANEL (ASSY): Normal Roof

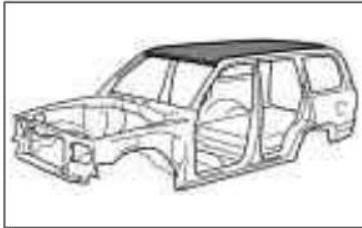

REMOVAL

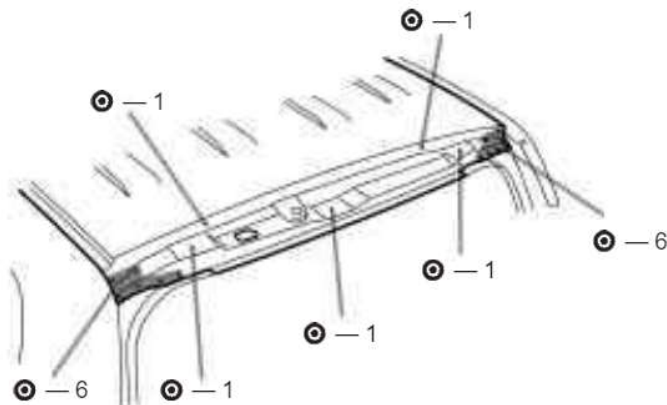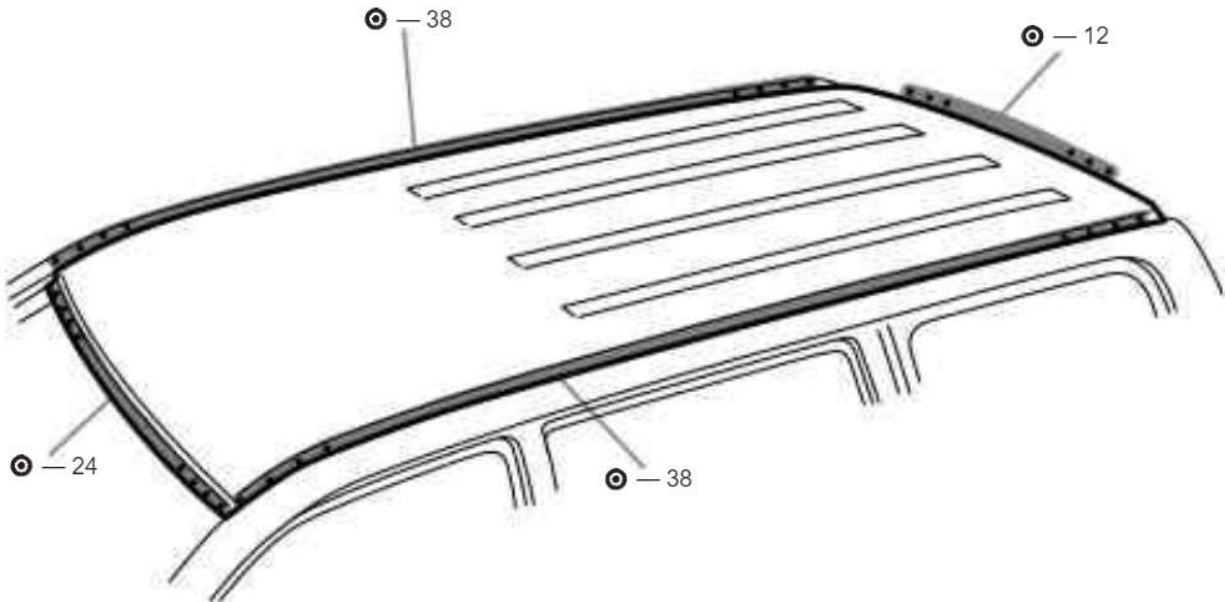

cardiagn.com



BODY PANEL REPLACEMENT

RE-69

INSTALLATION

[Foamed Material
Application Area]

A - A

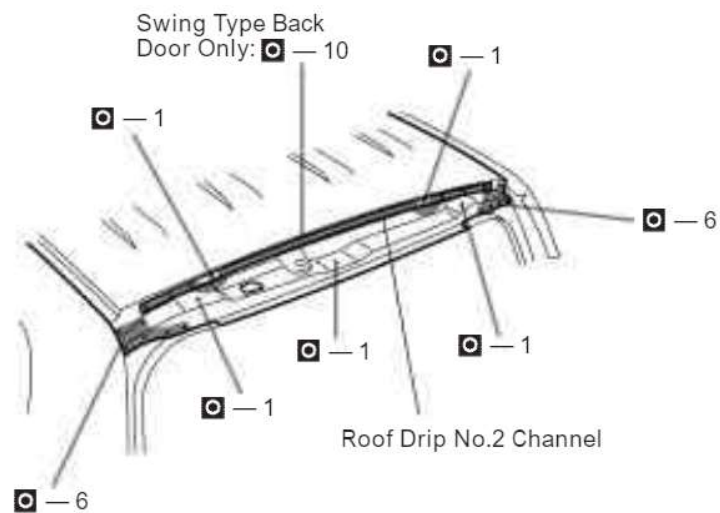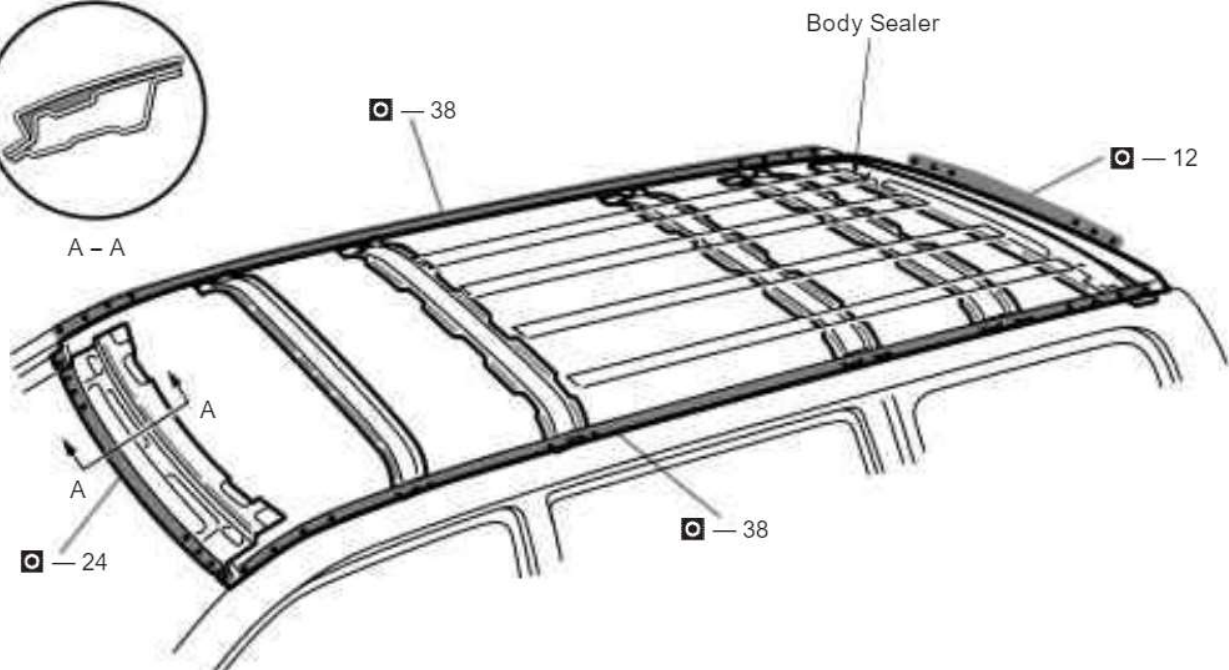

1. Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back door opening upper frame.
2. After installing the new parts, apply foamed materials.


HINT:

- 1) Apply just enough sealer for the new parts to make contact.
- 2) For other sealing points, refer to Section AR.


RE-70

BODY PANEL REPLACEMENT



ROOF PANEL (ASSY): Moon Roof

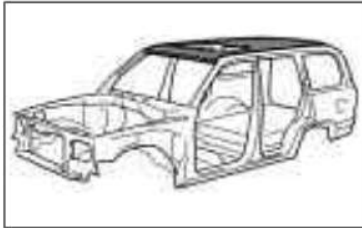

REMOVAL

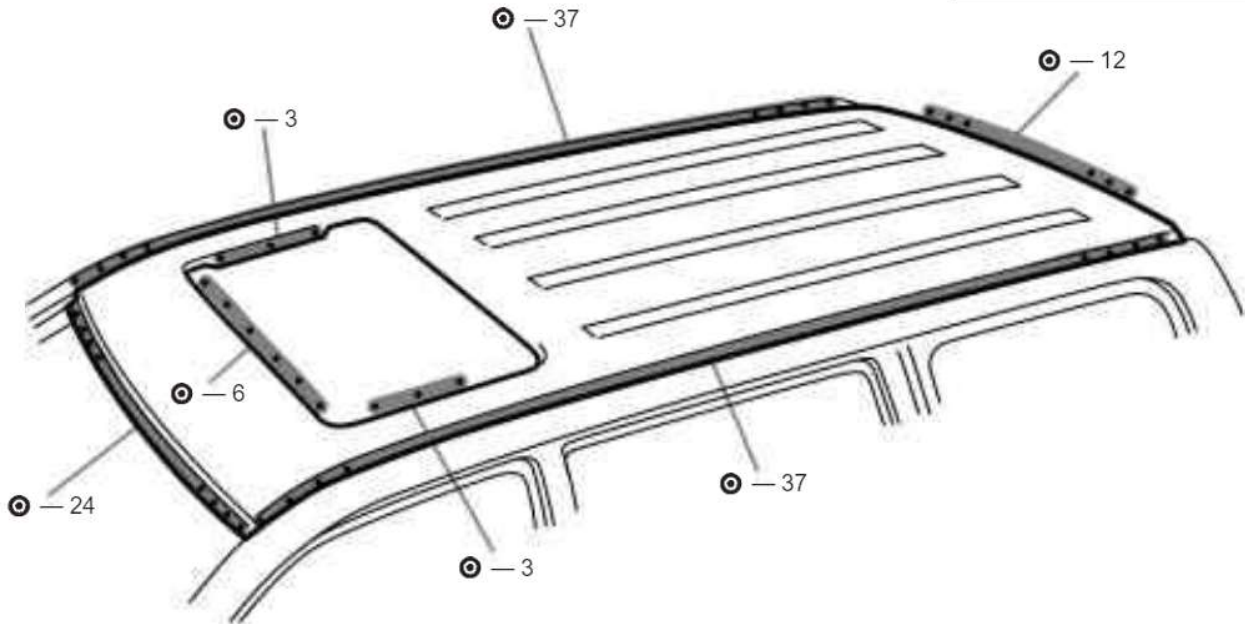

[If reusing the roof panel reinforcement]

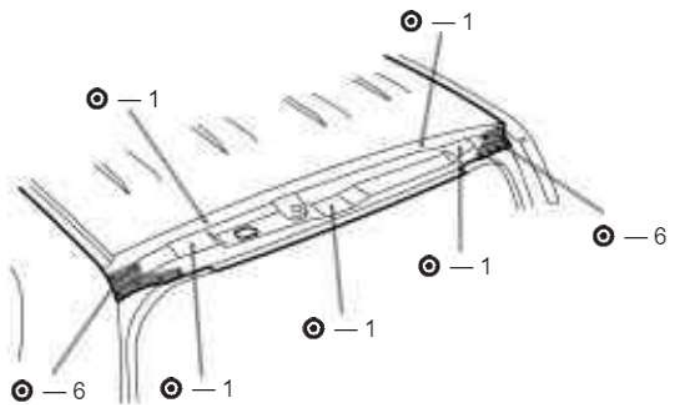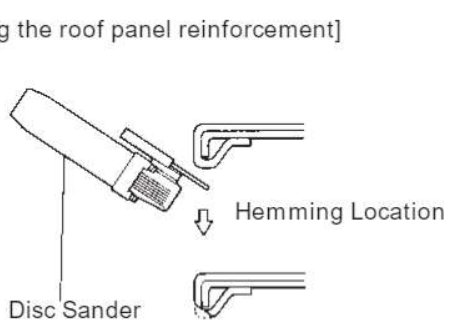

cardiagn.com




BODY PANEL REPLACEMENT

RE-71

INSTALLATION

[Foamed Material
Application Area]

A - A

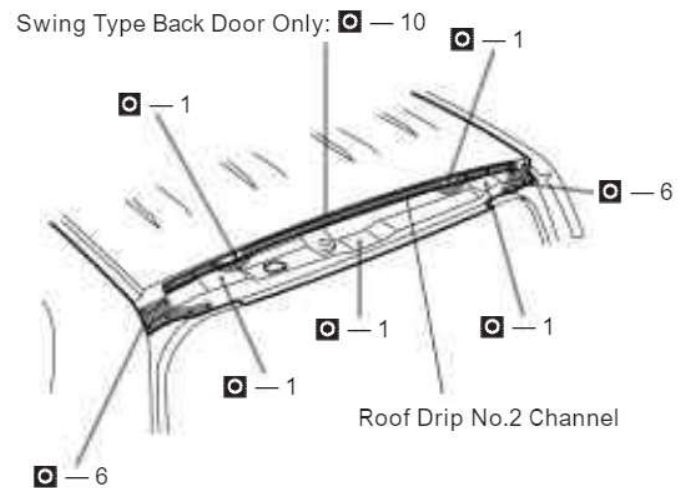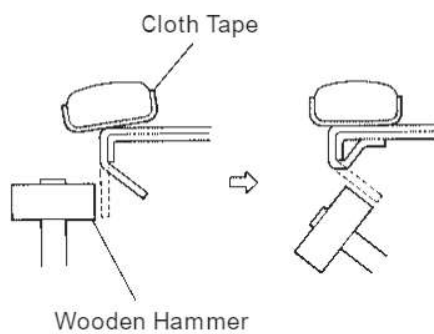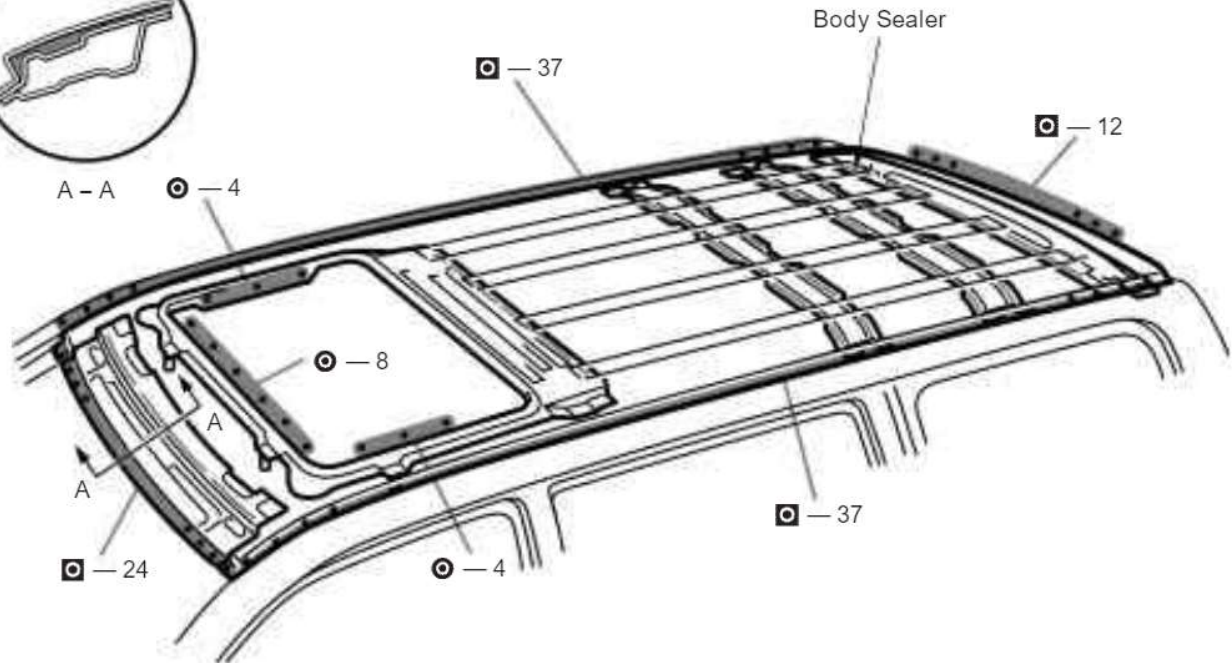

1. Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back window frame.

HINT:

- 1) Apply just enough sealer for the new parts to make contact.
- 2) For other sealing points, refer to Section AR.


2. Bend the flange hem with a wooden hammer and dolly.

HINT: Perform hemming three steps, being careful not to warp the panel.


3. After installing the new parts, apply foamed materials.

FIT STANDARDS


After doors and the engine hood are installed, be sure to perform fit adjustment to prevent abnormal wind noise and ensure a good appearance.

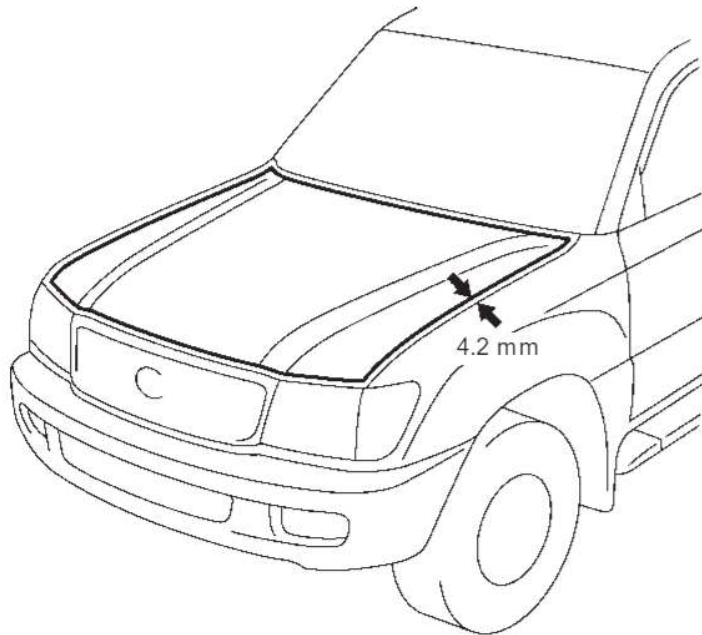


mm	in.
4.2	0.165
5.5	0.217
5.6	0.220

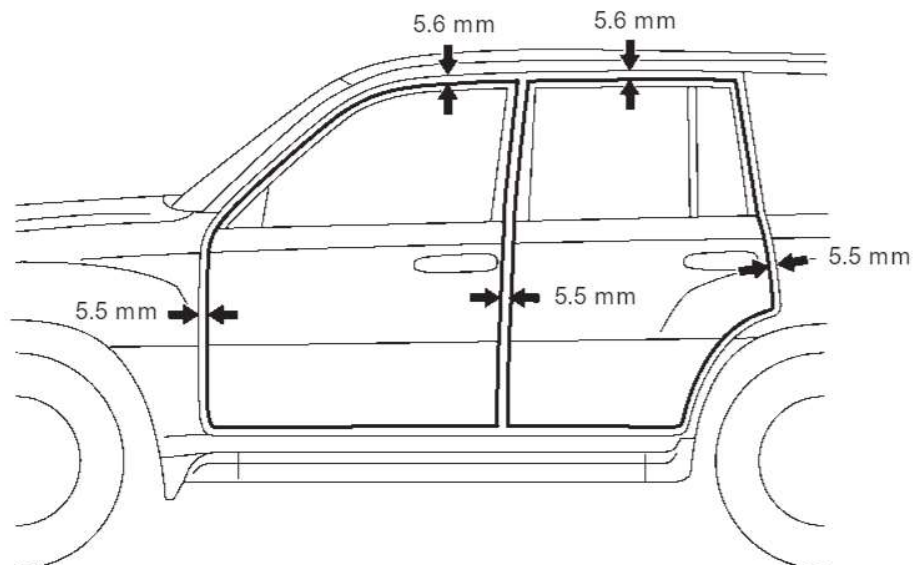

APPENDIX – Fit Standards

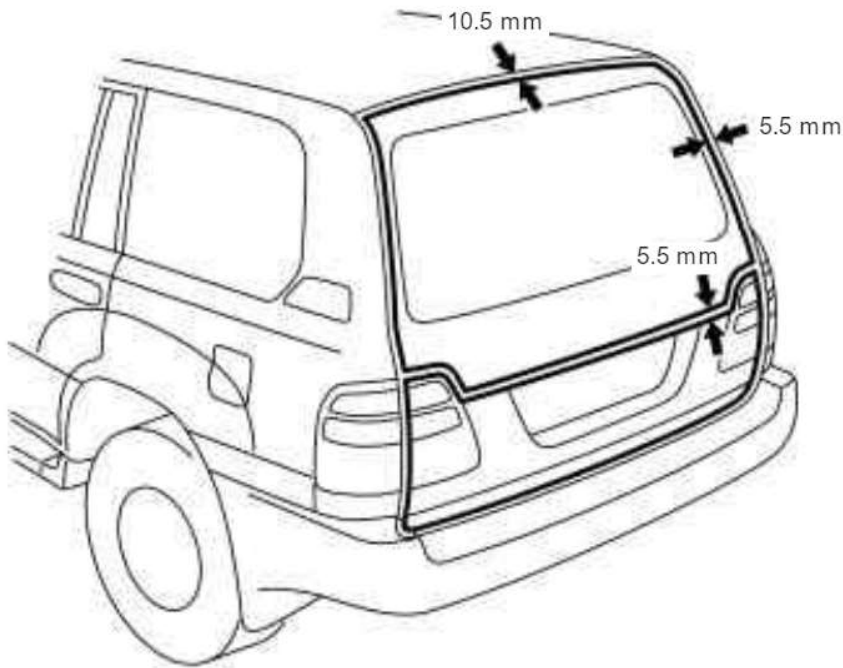

mm	in.
5.5	0.217
10.5	0.413

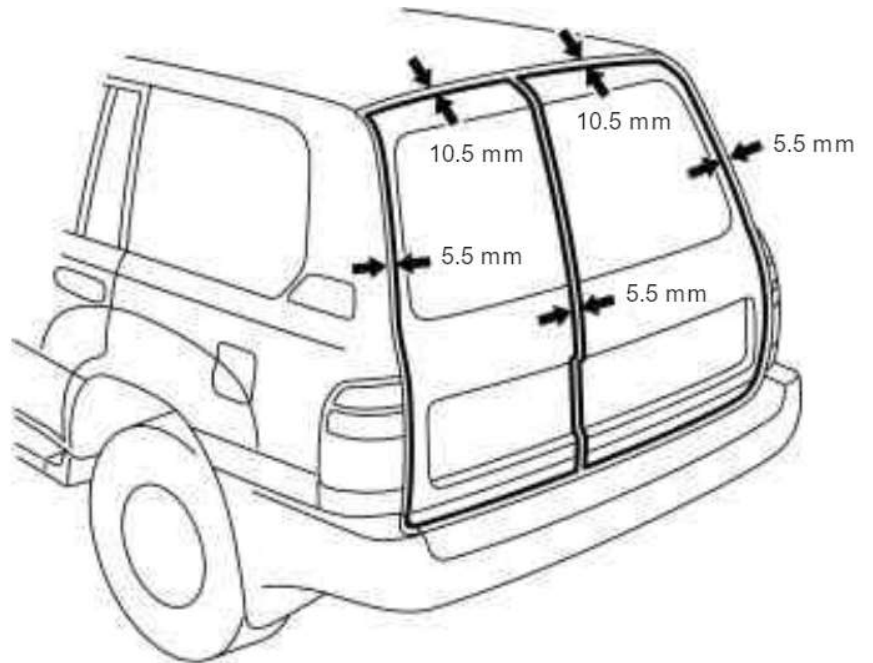









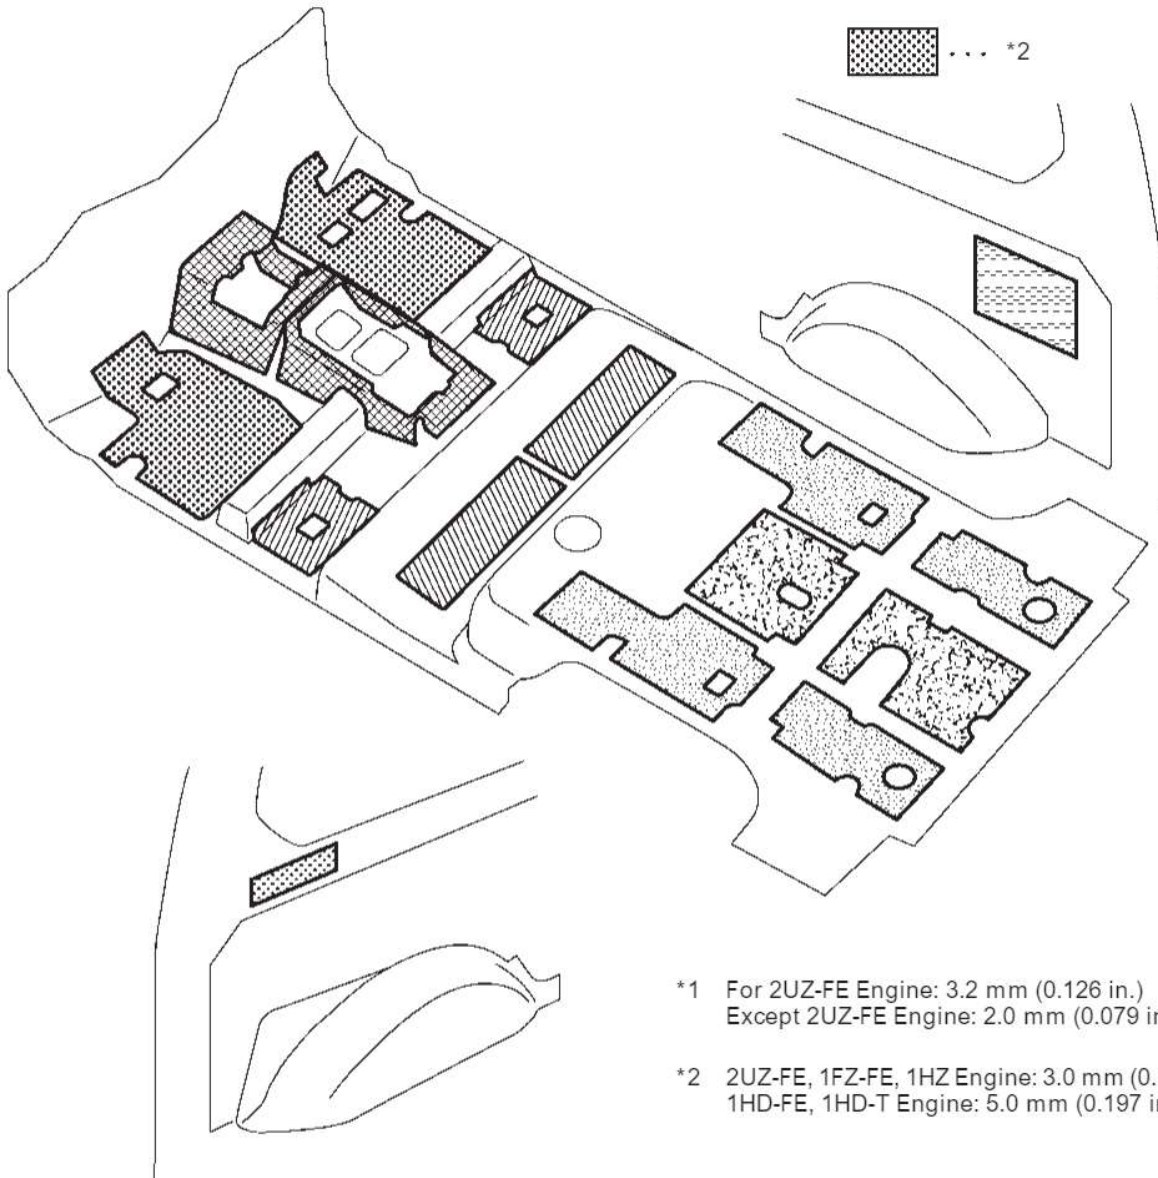
cardiagn.com

SILENCER SHEET INSTALLATION AREAS

1+1 SEATER MODELS

Thickness of Asphalt Sheet

-  ... 0.8 mm (0.031 in.)
-  ... 2.0 mm (0.079 in.)
-  ... 3.0 mm (0.118 in.)
-  ... 3.2 mm (0.126 in.)
-  ... 3.5 mm (0.138 in.)
-  ... 4.0 mm (0.157 in.)
-  ... *1
-  ... *2



*1 For 2UZ-FE Engine: 3.2 mm (0.126 in.)
 Except 2UZ-FE Engine: 2.0 mm (0.079 in.)









*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
 1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)


cardiagn.com

APPENDIX – Silencer Sheet Installation Areas

1+2 SEATER MODELS

Thickness of Asphalt Sheet

-  ... 0.8 mm (0.031 in.)
-  ... 2.0 mm (0.079 in.)
-  ... 3.0 mm (0.118 in.)
-  ... 3.2 mm (0.126 in.)
-  ... 3.5 mm (0.138 in.)
-  ... 4.0 mm (0.157 in.)
-  ... *1
-  ... *2

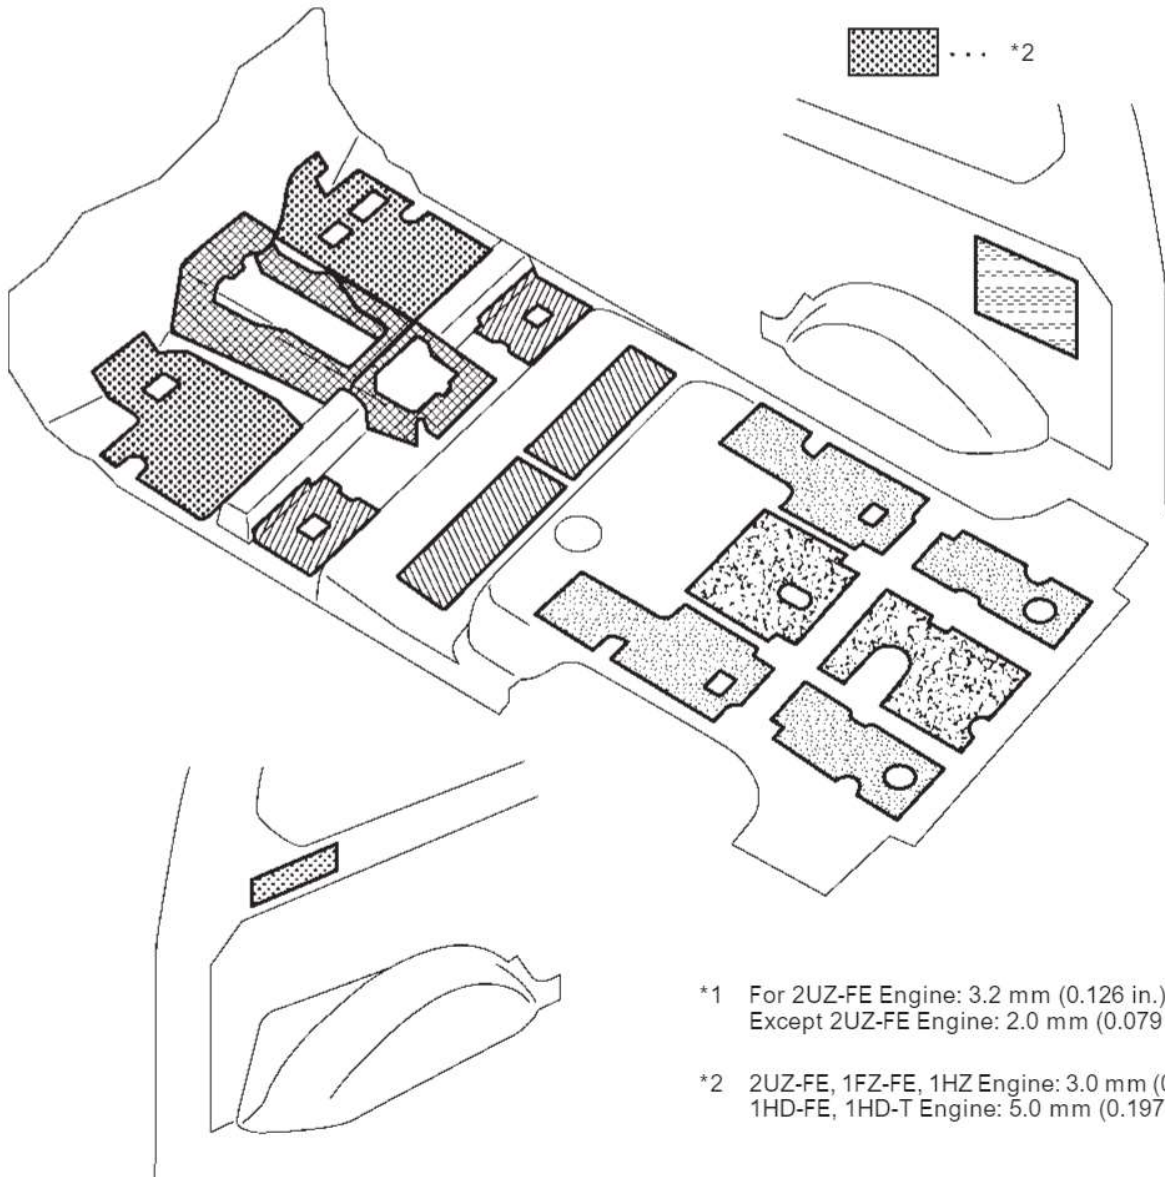

*1 For 2UZ-FE Engine: 3.2 mm (0.126 in.)
 Except 2UZ-FE Engine: 2.0 mm (0.079 in.)

*2 2UZ-FE, 1FZ-FE, 1HZ Engine: 3.0 mm (0.118 in.)
 1HD-FE, 1HD-T Engine: 5.0 mm (0.197 in.)