

Cathode-Ray Oscilloscopes



TEKTRONIX INC



Short Form Catalog

JULY, 1959

NEW HIGH-PERFORMANCE OSCILLOSCOPES

3.5- μ sec Risetime

In addition to a fast-rise vertical-deflection system and high-speed sweeps, these two new Tektronix Oscilloscopes have the dc-coupling, high sensitivity, slow sweeps, and versatile triggering needed for most general-purpose laboratory work.

The vertical amplifier used in the Type 581 and Type 585 requires a new kind of plug-in unit. Tektronix Type A to Z Units cannot be used in these instruments. Although only one of the new plug-in units (Type 80) is available as this catalog goes to press, other plug-in units are in development.

New TYPE 585 OSCILLOSCOPE

3.5- μ sec Risetime, Sweep Delay

Fast-Rise Vertical Amplifier

Passband—DC to approximately 100 MC.
Sensitivity—Basic deflection factor 0.1 v/cm with Type 80 Plug-In Preamplifier and P80 Probe.
Versatility—Designed for plug-in preamplifiers.

Sweep Delay


Triggered (jitter free)—delayed sweep is started after the delay period by the signal under observation.
Conventional—delayed sweep is started at the end of the delay period by the delayed trigger.
Range—1 μ sec to 10 sec, continuously adjustable (2 μ sec/cm to 1 sec/cm).

Two Time-Base Generators

TIME BASE A—0.05 μ sec/cm to 2 sec/cm in 24 calibrated steps, continuously variable from 0.05 μ sec/cm to 5 sec/cm. 5-x magnifier increases calibrated range to 0.01 μ sec/cm. Single-sweep provision for one-shot applications.
TIME BASE B—Also functions as delay generator. 18 calibrated steps from 2 μ sec/cm to 1 sec/cm.

Versatile Triggering

Amplitude-level selection with either preset or manual stability control.

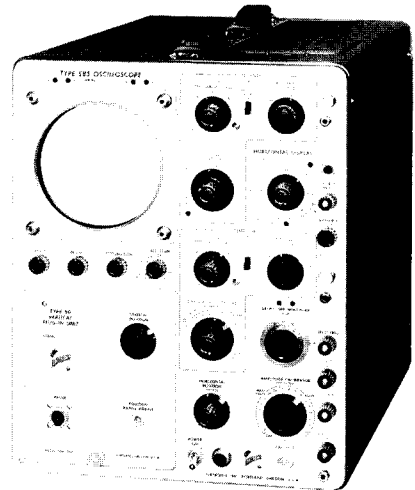

10-KV Accelerating Potential

Lumped-constant traveling-wave crt provides 4-cm by 10-cm display area.

Amplitude Calibrator

Square wave, 18 steps from 0.2 mv to 100 v, frequency about 1 kc.

Regulated Power Supplies

Price, without plug-in units \$1675.

New TYPE 581 OSCILLOSCOPE

Same as Type 585, except that it does not have TIME BASE B or provision for sweep delay.


Price, without plug-in units \$1375.

Type 80 Plug-In Preamplifier \$50.




Type P80 Probe with 2-x, 5-x, 10-x, 20-x, and 50-x attenuator heads \$100.

Note: Both Preamplifier and Probe are necessary to operate the Type 585 and Type 581 Oscilloscopes.

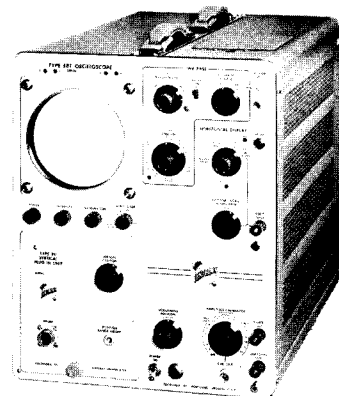

OSCILLOSCOPES WITH PLUG-IN PREAMPLIFIERS

Inherent characteristics of these Tektronix Oscilloscopes permit their conversion to many specialized applications through the use of interchangeable plug-in preamplifiers. Initial selection can include the Plug-In Preamplifier Units best suited to current requirements. When greater versatility becomes desirable, other available Type A to Z Plug-In Units can be added at moderate cost to expand the application area.



TYPE 533 OSCILLOSCOPE

High Performance


DC to 15 MC, 0.023- μ sec Risetime with Fast-Rise Plug-In Preamplifier Units.
0.2 μ sec Signal Delay.

0.02 μ sec/cm to 15 sec/cm Sweep Range.
Easy Operation
24 Calibrated direct-reading sweep rates, 0.1 μ sec/cm to 5 sec/cm.
Sweep Magnification—2, 5, 10, 20, 50, and 100 times.
Preset Triggering—Eliminates triggering adjustments in most applications.
Single-Sweep Operation—Lockout-reset circuitry for one-shot recording.

High Writing Rate


250 cm/ μ sec—10 kv accelerating potential assures bright trace for single sweeps and low repetition rates. 6-cm by 10-cm viewing area.

Electronically-Regulated Power Supplies.
Price, without plug-in units . . . \$1100.



TYPE 543 OSCILLOSCOPE

DC to 30 MC, 0.012- μ sec Risetime with Fast-Rise Plug-In Preamplifier Units.
4-cm by 10-cm Viewing Area.
All other characteristics same as Type 533.
Price, without plug-in units \$1275.



TYPE 532 OSCILLOSCOPE

DC to 5 MC Main Vertical Amplifier

0.07- μ sec Risetime with Wide-Band Plug-In Preamplifier Units.

Sweep Range

21 calibrated sweep rates from 1 μ sec/cm to 5 sec/cm. 5-x magnifier extends calibrated range to 0.2 μ sec/cm. Continuously variable from 0.2 μ sec/cm to 12 sec/cm.

Triggering

Amplitude-level selection with preset

TYPE 536 "X-Y" OSCILLOSCOPE

Identical Horizontal and Vertical Main Amplifiers

DC to 10 MC, both amplifiers, with Type G Differential Plug-In Preamplifiers.

Less than 1° relative phase difference from dc to 15 mc. Phase balance can be obtained at any one frequency to over 25 mc.

Converts to general-purpose oscillo-

scope with Type T Time-Base Unit plugged into horizontal amplifier.

4-KV Accelerating Potential

10 by 10 division viewing area.

Amplitude Calibrator

0.2 mv to 100 v in 18 steps. Square wave, frequency about 1 kc.

Electronically-Regulated Power Supplies.

Price, without plug-in units . . . \$1050.

or manual stability control, and fully-automatic triggering.

4-KV Accelerating Potential

8 by 10 cm linear display.


Amplitude Calibrator

0.2 mv to 100 v in 18 steps. Square wave, frequency about 1 kc.

Electronically-Regulated Power Supplies.

Price, without plug-in units . . . \$875.

Prices f.o.b. factory.



OSCILLOSCOPES WITH

REDESIGNED FOR

HIGHER PERFORMANCE

New DC-to-15 MC Vertical Amplifiers in Types 531A and 535A

New Wider Sweep-Delay Range in Types 535A and 545A

GREATER RELIABILITY

New Frame-Grid Twin Triodes Replace Older Types

Silicon-Diode Rectifiers Replace Seleniums in Power Supplies

EASIER OPERATION

Simplified Panel Layout
Color-Correlated Controls
Single-Knob Sweep Control
Simplified Display Control
Internal Triggering for Sweep Delay

TYPE 545A FAST-RISE OSCILLOSCOPE

with Sweep Delay

VERTICAL SPECIFICATIONS

DC-to-30 mc passband, 12- μ sec risetime, 50-mv/cm deflection factor with Type K Plug-In Pre-amplifier.

Nine other plug-in units available for specialized applications.

Signal delay permits observation of leading edge of waveform that triggers the sweep.

HORIZONTAL SPECIFICATIONS

Two Time-Base Generators—

Time Base A—0.1 μ sec/cm to 5 sec/cm in 24 calibrated steps.

Continuously adjustable from 0.1 μ sec/cm to 12 sec/cm.

5-x magnifier increases calibrated range to 0.02 μ sec/cm.

Single sweep provision for one-shot applications.

Time Base B—Also functions as delay generator. 2 μ sec/cm to 1 sec/cm in 18 calibrated steps.

Sweep Delay—Two modes of operation


Triggered—Delayed sweep started after the delay period by the signal under observation. Steady display, even of signals with inherent jitter.

Conventional—Delayed sweep started at the end of the delay period by the delayed trigger. Time jitter less than one part in 20,000.

Delay range—1 μ sec to 10 sec in 18 calibrated ranges, each range divisible into 1000 parts by 10-turn control with incremental accuracy within 0.2%.

OTHER CHARACTERISTICS

10-KV Accelerating Potential—4-cm by 10-cm display.

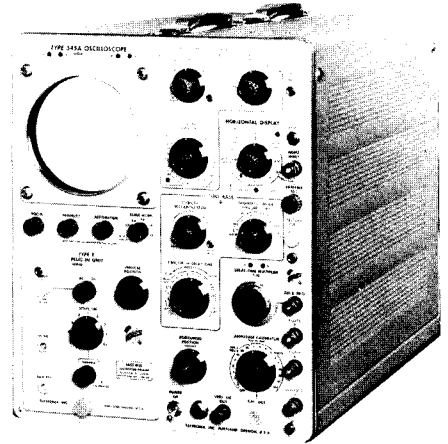


Dual-Trace Blanking—Eliminates switching transients from display when dual-trace unit is operated in its chopped mode.

Amplitude Calibrator—0.2 mv to 100 v.

Electronically-Regulated Power Supplies.

Price—Type 545A, without plug-in units **\$1550.**



TYPE 541A FAST-RISE OSCILLOSCOPE

Same as Type 545A, except that it does not have Time Base B or provisions for sweep delay or single sweeps.

Price—Type 541A, without plug-in units **\$1200.**


TYPE 535A WIDE-BAND OSCILLOSCOPE

with Sweep Delay

Same specifications as Type 545A, except for main vertical amplifier.

DC-to-15 MC passband, 23- μ sec risetime, 50-mv/cm deflection factor with Type K Plug-In Pre-amplifier, 6-cm by 10-cm display.


Price—Type 535A, without plug-in units **\$1400.**



TYPE 531A WIDE-BAND OSCILLOSCOPE

Same as Type 535A except that it does not have Time Base B or provisions for sweep delay or single sweeps.

Price—Type 531A, without plug-in units **\$995.**



Prices f.o.b. factory.

PLUG-IN PREAMPLIFIERS

TYPE 551 DUAL-BEAM OSCILLOSCOPE

with Common X and Independent Y Deflection

Wide-Band Main Vertical Amplifiers

Passbands—dc to 25 mc with Type K Units.

Risetimes—0.014 μ sec with Type K Units.

0.2- μ sec Signal Delay

All Tektronix Type A to Z Plug-In Preamplifiers can be used in both channels for signal-handling versatility.

Wide Sweep Range

24 calibrated steps from 0.1 μ sec/cm to 5 sec/cm. 5-x

magnifier increases calibrated range to 0.05 μ sec/cm.

Lockout-reset circuitry for one-shot sweep applications.

Complete Triggering

Fully automatic, or amplitude-level selection with preset or manual stability control.

10-KV Accelerating Potential

Bright display for fast sweeps and low repetition rates.


4-cm by 10-cm display for each beam, with 2-cm overlap.

Separate Power Supply

Electronically regulated.

Price, without plug-in preamplifiers \$1800.

Includes Indicator Unit, Power Supply Unit, 4 Probes.

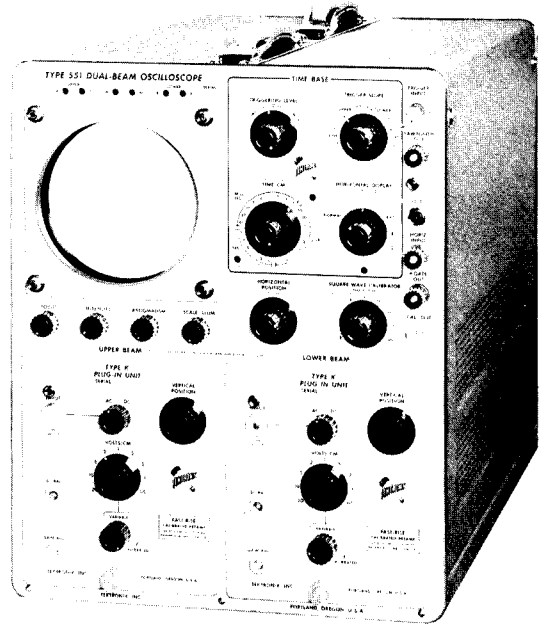

TYPE 555 DUAL-BEAM OSCILLOSCOPE

with Independent X and Y Deflection

Independent Electron Beams

Separate vertical and horizontal deflection of both beams.

Fast-Rise Main Vertical Amplifiers

Passbands—dc to 30 mc with Type K Units.

Risetimes—12 m μ sec with Type K Units.

0.2- μ sec Signal Delay

All Tektronix Type A to Z Plug-In Preamplifiers can be used in both vertical channels for signal-handling versatility.

Wide-Range Time-Base Generators

Either time-base generator can be used to deflect either or both beams.

Sweep ranges—0.1 μ sec/cm to 12 sec/cm. 5-x magnifiers increase calibrated sweep rates to 0.02 μ sec/cm.

Sweep Delay—Two modes of operation

Triggered—Delayed sweep started after the delay period by the signal under observation.

Conventional—Delayed sweep started at the end of the delay period by the delayed trigger.

Delay range—0.5 μ sec to 50 sec in 24 calibrated steps, with continuous calibrated adjustment between steps.

High Writing Rate

10-KV Accelerating potential provides bright traces at low repetition rates and in one-shot application. 4-cm by 10-cm display for each beam, with 2-cm overlap.

Separate Power Supply

Electronically regulated dc and heater supplies.

Price, without plug-in preamplifiers \$2600.

Includes Indicator Unit, Power Supply Unit, 2 Time-Base Units, 4 Probes, Time-Base Extension.

Prices f.o.b. factory.

OSCILLOSCOPES WITH


PLUG-IN PREAMPLIFIERS

MAIN SPECIFICATIONS of TEKTRONIX TYPE 530 SERIES,

TYPE 540 SERIES, and TYPE 550 SERIES OSCILLOSCOPES

	Vertical Frequency Response (with Type K Unit)	Signal Delay	Calibrated Sweep Range	Sweep Magnifier	Sweep Delay	Accelerating Potential	Price (without plug-in units)		Vertical Frequency Response (with Type K Unit)	Signal Delay	Calibrated Sweep Range	Sweep Magnifier	Sweep Delay	Accelerating Potential	Price (without plug-in units)
TYPE 531A General Purpose	dc to 15 mc	Yes	0.1 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$995		TYPE 541A Fast-Rise	Yes	0.1 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$1200
TYPE 532 General Purpose	dc to 5 mc	No	1 μ sec/cm to 5 sec/cm	5x	None	4 kv	\$875		TYPE 543 Fast-Rise	Yes	0.1 μ sec/cm to 5 sec/cm	2, 5, 10, 20, 50, 100x	None	10 kv	\$1275
TYPE 533 General Purpose	dc to 15 mc	Yes	0.1 μ sec/cm to 5 sec/cm	2, 5, 10, 20, 50, 100x	None	10 kv	\$1100		TYPE 545A Fast-Rise	Yes	0.1 μ sec/cm to 5 sec/cm	5x	1 μ sec to 10 sec	10 kv	\$1550
TYPE 535A General Purpose	dc to 15 mc	Yes	0.1 μ sec/cm to 5 sec/cm	5x	1 μ sec to 10 sec	10 kv	\$1400		TYPE 551 Dual-Beam	Yes	0.1 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$1800
Type 536 X-Y Curve Tracer	dc to 11 mc	No	See Type T Time-Base Gen.		None	4 kv	\$1050		TYPE 555 Dual-Beam	Yes	0.1 μ sec/cm to 5 sec/cm	5x	0.5 μ sec to .50 sec	10 kv	\$2600


Type A to Z Plug-In Units

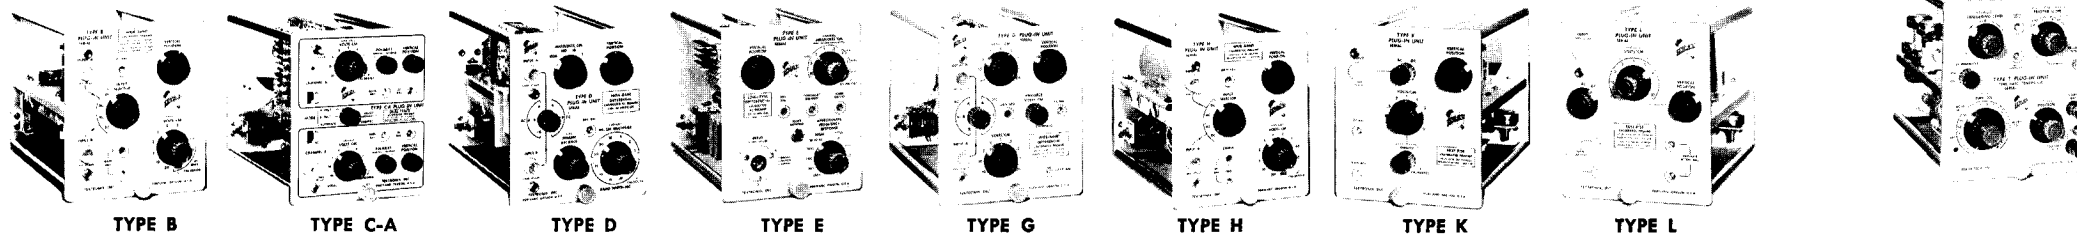


Type T Time-Base Generator—Provides the sweep voltages necessary for operating the Type 536 in the usual oscilloscope applications. Generates 22 calibrated sweep rates from 0.2 μ sec/div to 2 sec/div. 5-x magnifier is accurate at all sweep rates. Triggering is fully automatic, or manual with amplitude-level selection and preset or manual stability control. **Price \$235.**

CHARACTERISTICS OF PLUG-IN PREAMPLIFIERS

	Risetime and Passband of Combination — Plugged into Type					Calibrated Deflection Factor	Input Capacitance	Price
	531A-533-535A	541A-543-545A-555	551	536	532			
TYPE A Wide-Band DC	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm	47 μ f	\$90
TYPE B Wide-Band High-Gain	0.035 μ sec 2 c to 10 mc	0.03 μ sec 2 c to 12 mc	0.03 μ sec 2 c to 9 mc	0.04 μ sec 2 c to 9 mc	0.07 μ sec 2 c to 5 mc	5 mv/cm to 0.05 v/cm	47 μ f	\$135
	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm		
TYPE C-A Dual-Trace DC	0.023 μ sec dc to 15 mc	0.015 μ sec dc to 24 mc	0.016 μ sec dc to 22 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm	20 μ f	\$250
TYPE D High-Gain DC Differential	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	1 mv/cm to 50 v/cm	47 μ f	\$155
TYPE E Low-Level AC Differential	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	50 μ v/cm to 10 mv/cm	50 μ f	\$175
TYPE G Wide-Band DC Differential	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm	47 μ f	\$185
TYPE H DC Coupled High-Gain Wide-Band	0.031 μ sec dc to 11 mc	0.023 μ sec dc to 15 mc	0.025 μ sec dc to 14 mc	0.037 μ sec dc to 9.5 mc	0.07 μ sec dc to 5 mc	5 mv/cm to 20 v/cm	47 μ f	\$185
TYPE K Fast-Rise DC	0.023 μ sec dc to 15 mc	0.012 μ sec dc to 30 mc	0.014 μ sec dc to 25 mc	0.031 μ sec dc to 11 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm	20 μ f	\$135
TYPE L Fast-Rise High-Gain	0.023 μ sec 3 c to 15 mc	0.015 μ sec 3 c to 24 mc	0.017 μ sec 3 c to 22 mc	0.035 μ sec 3 c to 10 mc	0.07 μ sec 3 c to 5 mc	5 mv/cm to 2 v/cm	20 μ f	\$200
	0.023 μ sec dc to 15 mc	0.012 μ sec dc to 30 mc	0.014 μ sec dc to 25 mc	0.031 μ sec dc to 11 mc	0.07 μ sec dc to 5 mc	0.05 v/cm to 20 v/cm		



Type R Plug-In Unit—a transistor testing unit for Tektronix Oscilloscopes with the Plug-In Feature. Supplies a fast-rising pulse and the required supply and bias voltages for measurement of transistor rise, fall, delay, and storage times. 400-ma collector supply, 100-ma bias supply, 5 μ sec-risetime pulse. **Price \$300.**

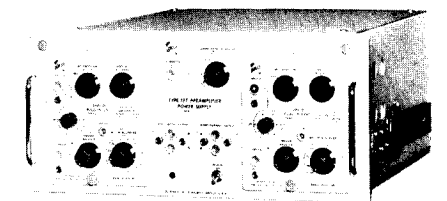

Type 127 Pre-amplifier Power Supply—a rack-mounting unit that supplies proper operating power to one or a combination of two Type A to Z Plug-In Pre-amplifiers. Contains a differential dc-coupled amplifier stage with push-pull output. Risetime is 0.018 μ sec. Square-wave amplitude calibrator has 18 steps from 0.2 mv to 100 v. Dimensions — 8 $\frac{3}{4}$ " high, 19" wide, 20" rack depth. **Price \$525.**


Prices f.o.b. factory.

RACK-MOUNTING OSCILLOSCOPES

with the Tektronix Plug-In Preamplifier Features

Types RM31A, RM32, RM33, RM35A, RM41A, RM43, RM45A Oscilloscopes are mechanically rearranged Types 531A, 532, 533, 535A, 541A, 543, 545A Oscilloscopes for mounting in a standard 19-inch rack. The chassis is attached to the cabinet on slide-out tracks. It can be pulled forward, tilted and locked in any of seven positions for servicing convenience.

Dimensions—14" high, 19" wide, 22½" rack depth.

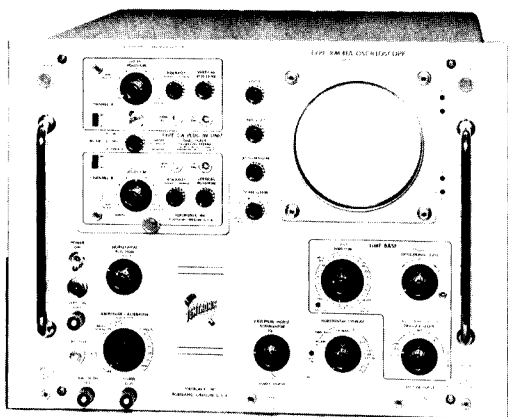


TYPE RM31A OSCILLOSCOPE

Electrically identical to the Tektronix Type 531A
Price, without plug-in units \$1095.

TYPE RM32 OSCILLOSCOPE

Electrically identical to the Tektronix Type 532
Price, without plug-in units \$975.

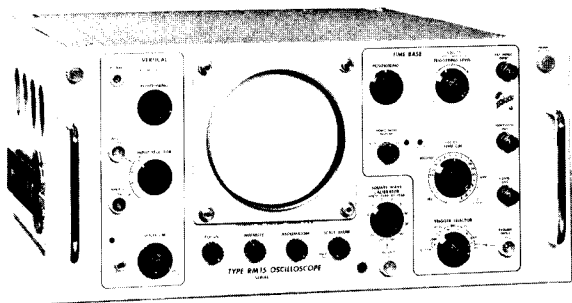

TYPE RM15 RACK-MOUNTING OSCILLOSCOPE

A mechanical rearrangement of the Type 515A for rack-mounting. The electrical characteristics of the Type RM15 are the same as the Type 515A.
Slide-out Mounting.

Dimensions—8¾" high, 19" wide, 22½" rack depth.
Price \$875.

TYPE RM33 OSCILLOSCOPE

Electrically identical to the Tektronix Type 533
Price, without plug-in units \$1200.

TYPE RM35A OSCILLOSCOPE

Electrically identical to the Tektronix Type 535A
Price, without plug-in units \$1500.

TYPE RM41A OSCILLOSCOPE


Electrically identical to the Tektronix Type 541A
Price, without plug-in units \$1300.

TYPE RM43 OSCILLOSCOPE

Electrically identical to the Tektronix Type 543
Price, without plug-in units \$1375.

TYPE RM45A OSCILLOSCOPE

Electrically identical to the Tektronix Type 545A
Price, without plug-in units \$1650.

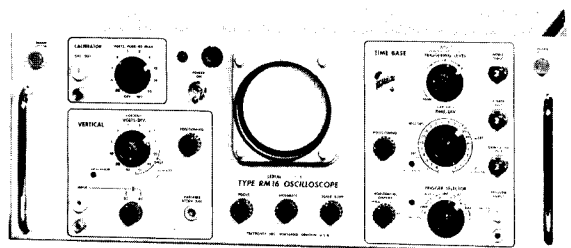

TYPE RM16 and TYPE RM17 OSCILLOSCOPES

Mechanical rearrangements of Type 316 and Type 317 Oscilloscopes. Same electrical characteristics. Slide-out mountings. Dimensions: 7" h, 19" w, 17⅞" d.

Prices: Type RM16 — \$825. Type RM17 — \$875.
Type R516—a two-unit model of the Type RM16 for racks of limited depth. Dimensions, Indicator—7" h, 19" w, 11 3/8" d; Power supply—7" h, 19" w, 5½" d. 60" power cable. Fixed mounting. Price \$875.

CATHODE-RAY OSCILLOSCOPES

New TYPE 507 OSCILLOSCOPE for High-Voltage Surge Testing

Vertical Deflection Factor

Approximately 50 v/cm to 500 v/cm in ten equal steps.

Risetime

Adjusted to 5 m μ sec for optimum transient response.

Calibrated Vertical Positioning

Seven 50-v steps—also continuously adjustable.

Calibrated Sweeps

Eleven fixed sweeps from 20 m μ sec/cm to 50 μ sec/cm.

High Accelerating Potential



24-KV provides bright trace for photographic recordings.

6-cm by 10-cm Linear Deflection

Electronically-Regulated Power Supply

Price \$3000.

Includes Indicator Unit, Power Supply Unit, Type 500A Scope-Mobile, Common-bus Ground Connector.

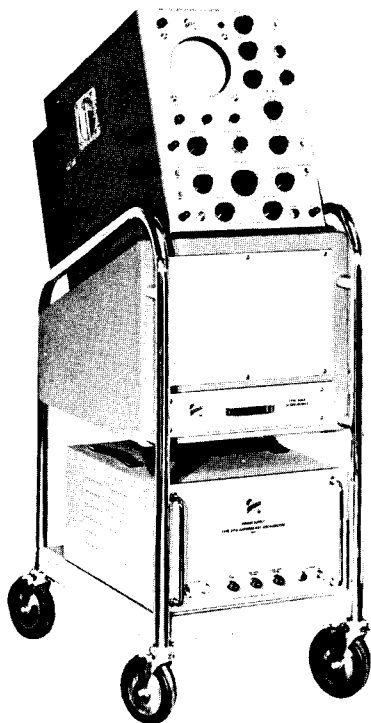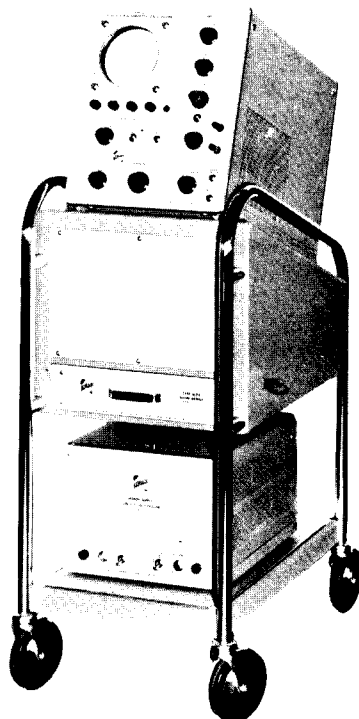

TYPE 517A OSCILLOSCOPE

Excellent Transient Response

Vertical-amplifier risetime—7 millimicroseconds.

Deflection factor—0.05 v/cm.

Signal-displacement error—less than 2% of 2 cm.

Fast Triggered Sweeps

Eleven calibrated rates from 0.01 μ sec/cm to 20 μ sec/cm.

Sweep-displacement error—less than 2% of 8 cm.

High Writing Rate

1100 cm/ μ sec. 24-kv accelerating potential on Tektronix metallized crt.

Pulse-Type Amplitude Calibrator

Trigger-Rate Generator

Automatic Duty-cycle Limiter

Cathode-Follower Input Probe

Electronically-Regulated Power Supplies

Highly Mobile—Indicator unit and power supply mounted on Scope-Mobile.

Price \$3500.

Includes Indicator Unit, Power Supply Unit, Type 500A Scope-Mobile, CF Probe, Step Attenuator, Cable, Bezel, Viewing Hood.

Prices f.o.b. factory.

CATHODE-RAY OSCILLOSCOPES

TYPE 502 DUAL-BEAM OSCILLOSCOPE

High Sensitivity

200 $\mu\text{v}/\text{cm}$, dc coupled, both beams.

Differential Input

Both amplifiers, at all sensitivities.

Curve Tracing With Two Beams

(Horizontal sensitivity to 0.1 v/cm.)

Single-Beam Curve Tracing—200 $\mu\text{v}/\text{cm}$, both axes.

Frequency Response

Both amplifiers—dc to 100 kc at 200 $\mu\text{v}/\text{cm}$, increasing to 200 kc at 1 mv/cm, to 400 kc at 50 mv/cm, and to 1 mc at 0.2 v/cm.


Wide Sweep Range

21 direct-reading calibrated sweep rates from 1 $\mu\text{sec}/\text{cm}$ to 5 sec/cm.


Accurate Sweep Magnifier—2, 5, 10, and 20 times.

Automatic Triggering

Amplitude Calibrator—6 steps, 1 mv to 100 v.

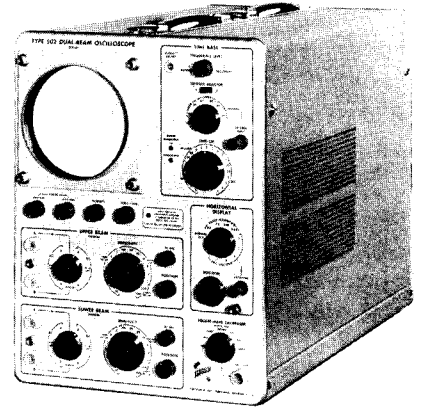

Electronically-Regulated Power Supplies
Input stages of both amplifiers have transistor-regulated parallel heater supplies.
Price \$825.



TYPE 310A PORTABLE OSCILLOSCOPE

Vertical Response—DC to 4 mc, 0.1 v/div to 50 v/div in 9 calibrated steps. 3 additional steps from 0.01 v/div to 0.1 v/div, at 2 cycles to 3.5 mc. Continuously variable from 0.01 v/div to 150 v/div.

Risetime—0.09 μsec .

Sweep Range—0.1 $\mu\text{sec}/\text{div}$ to 0.6 sec/div, with 5-x magnifier.

Versatile Triggering—Internal, external, line. . . . ac-coupled or dc-coupled and automatic triggering.
Price \$595.

New TYPE 317 PORTABLE OSCILLOSCOPE

9-KV Accelerating Potential—Bright trace at low sweep repetition rates.


Vertical Response—DC to 10 mc, 0.1 v/div to 50 v/div in 9 calibrated steps. 3 additional steps from 0.01 v/div to 0.1 v/div, at 2 cycles to 10 mc. Continuously variable from 0.01 v/div to 125 v/div.

Risetime—0.035 μsec .

Sweep Range—0.2 $\mu\text{sec}/\text{div}$ to 6 sec/div, with 22 calibrated steps. Accurate 5-x magnifier.

Triggering—Amplitude-level selection with preset or manual stability control, and automatic triggering.


Price \$800.

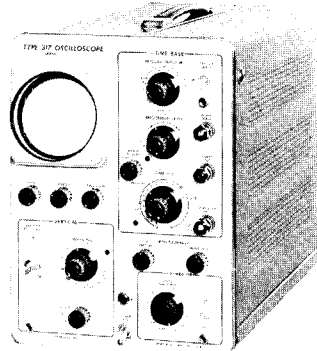

Type 316 Portable Oscilloscope

1.85-KV Accelerating Potential. Identical to Type 317 in all other specifications.

Price \$750.



TYPE 515A PORTABLE OSCILLOSCOPE

Passband—DC to 15 mc.

Sensitivity—0.05 v/cm to 20 v/cm in 9 calibrated steps—continuously variable from 0.05 v/cm to 50 v/cm.

Risetime—0.023 μsec .

Sweep Range—0.2 $\mu\text{sec}/\text{cm}$ to 6 sec/cm with 22 calibrated steps. Accurate 5-x magnifier.

Balanced 0.25 μsec Delay Network.

Triggering—Amplitude-level selection with preset or manual stability control, and automatic triggering.
Price \$800.

Prices f.o.b. factory.

CHARACTERISTIC-CURVE TRACERS

TYPE 575 TRANSISTOR

CHARACTERISTIC-CURVE TRACER

20 ampere collector displays. (10 ampere average supply current).

2.4 Ampere base supply.

Positive or negative collector sweep—

Collector supply—0 to 20 v, 10 amperes.
0 to 200 v, 1 ampere.

Positive or negative base stepping

4 to 12 steps/family, repetitive or single family display.

17 current/step positions, 0.001 ma/step to 200 ma/step.

5 voltage/step positions, with 24 different driving resistances.

Calibrated display

Vertical Axis—


Collector current
Base voltage
Base current
Base source voltage

Horizontal Axis—

Collector voltage
Base voltage
Base current
Base source voltage

Collector current range is in 16 steps from 0.01 to 1000 ma/div.


Pushbuttons are provided for multiplying each current step by 2 and dividing by 10, increasing the current range to 0.001 to 2000 ma/div.

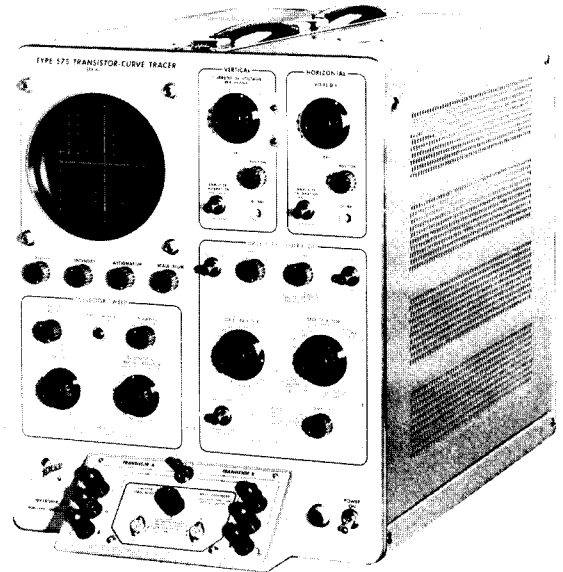

Base voltage range is from 0.01 v/div to 0.5 v/div in 6 steps.

Collector voltage range is from 0.1 v/div to 20 v/div in 11 steps.

Price \$975.

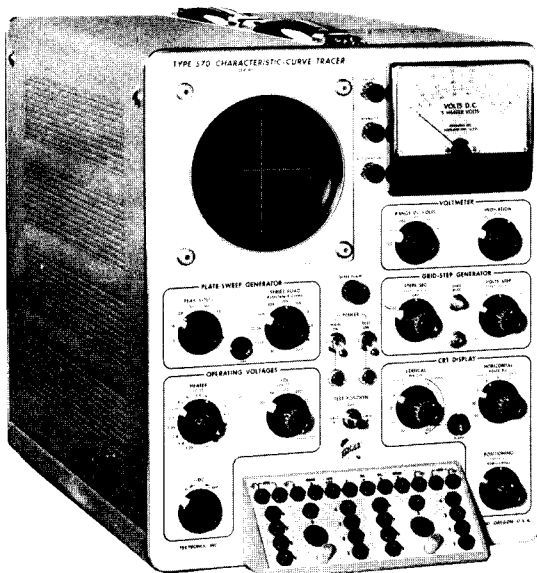

TYPE 570 ELECTRON-TUBE

CHARACTERISTIC-CURVE TRACER

Displays 4 to 12 characteristic curves per family.

Plots all important characteristics—

Plate current against plate or grid voltage.
Screen current against plate or grid voltage.
Grid current against plate or grid voltage.

Plots up to 8 positive-bias curves per family.

Calibrated Controls—

Accurate current and voltage readings directly from the crt screen.

Wide Display Range—

11 current ranges from 0.02 ma/div to 50 ma/div.

9 voltage ranges from 0.1 v/div to 50 v/div.

11 series-load resistors from 300 ohms to 1 megohm.


7 grid-step values from 0.1 v/step to 10 v/step.

Heater voltages available in 17 steps, variable to 20%.

Price \$995.

Prices f.o.b. factory.


TELEVISION OSCILLOSCOPES

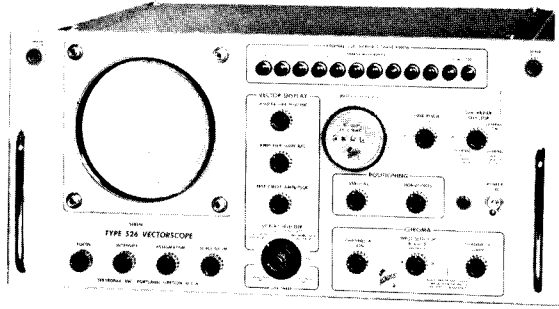

New **TYPE 526 VECTORSCOPE**
for the N.T.S.C. Color-Television Signal
Both Vector and Line-Sweep Displays

- Phase Accuracy**— $\pm 1.5^\circ$ by vector presentation, $\pm 1^\circ$ by null technique.
- Phase Resolution**—Better than 0.1° at 3.58 mc.
- Saturation Measurements**— $\pm 2\%$ on graticule, closer when comparing two signals.
- Dual Displays**—Electronically-switched dual input channels permit direct comparisons between two signals.

- Interfield Signal Key**—Permits easy display of test signals during vertical blanking time.
- Linear Time Base**—Operates at line rate, synchronized by horizontal sync pulse.
- Burst Brightening**—Positive identification of burst packet.
- Push-Pull Synchronous Demodulators**—DC-Coupled to crt to prevent changes in chroma signal composition from affecting the positioning of the display.
- Self-Checking Circuitry**
- Subcarrier Regenerator**
- Price** **\$1800.**

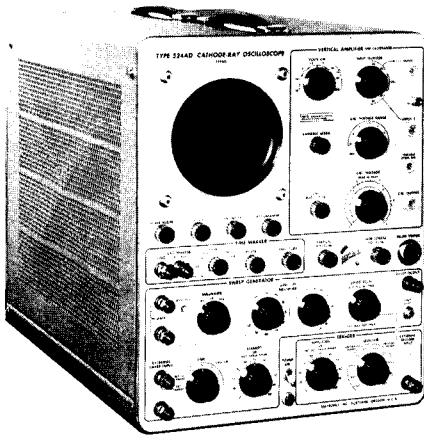

TYPE 524AD TELEVISION OSCILLOSCOPE


Passband

- Normal**—dc to 10 mc from 0.15 v/cm to 50 v/cm, 2 cycles to 10 mc from 15 mv/cm to 50 v/cm.
- Flat**—Within 1% from 60 cycles to 5 mc.
- IRE**—Meets IRE standards for level measurements.
- Risetime**—0.035 μ sec.
- Sweep Range**—Continuously variable, 0.1 μ sec/cm to 0.01 sec/cm.
- Time Markers**—0.05 μ sec, 0.1 μ sec, 1.0 μ sec, 200, and 40 pips per television line.
- Sweep Delay**—0 to 25 milliseconds, continuously variable.
- DC-Coupled Unblinking.**
- 3-x and 10-x Magnifier.**
- Variable-Duty-Cycle Amplitude Calibrator.**
- Price** \$1250.

TYPE 525 TELEVISION WAVEFORM MONITOR

Frequency Response

- Flat**—within 1% between 60 cycles and 5 mc.
- Low Pass**—passes stair steps, eliminates high frequencies.
- High Pass**—passes high frequencies, eliminates stair steps.
- IRE**—meets IRE standards for level measurements.
- Sensitivity**—Deflection factor of the vertical amplifier is 0.015 v/cm.
- Vertical Attenuator**—1-x, 2-x, and 5-x.
- Keyed Clamp-Type DC Restorer.**
- Gain Stability** within 1%.
- Rack-Mounting**— $8\frac{3}{4}$ " high, 19" wide, $20\frac{3}{4}$ " rack depth.
- Price** \$1100.

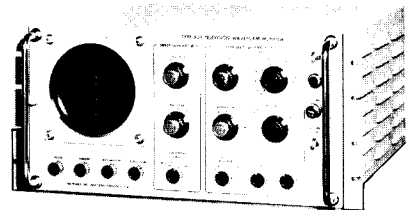

- TYPE 525MOD111**—Equipped with intensifier for observation of vertical-blanking-interval test signal.
- Price** \$1145.

AUXILIARY INSTRUMENTS




TYPE 105 SQUARE-WAVE GENERATOR

Risetime—13 millimicroseconds, with 52-ohm termination.
Frequency Range—25 cycles to 1 mc, continuously variable.
Frequency Meter—Direct reading, accurate within 3% of full scale.
Output Amplitude—0 to 100 v maximum, 0 to 15 v across 93 ohm load.
Price \$395.

TYPE 107 SQUARE-WAVE GENERATOR

Risetime—3 millimicroseconds, with 52-ohm termination.
Frequency Range—400 kc to 1 mc, uncalibrated.
Output Amplitude—0.1 v to 0.5 v, with 52-ohm termination.
Price \$175.




TYPE 130 L-C METER

Guard Voltage—Permits measuring an unknown capacitance while eliminating the effects of other capacitances from the measurements.
Five Ranges—
Microhenries—0 to 3, 10, 30, 100, 300.
Micromicrofarads—0 to 3, 10, 30, 100, 300.
Accuracy—Within 3% of full scale.
Price \$200.

TYPE 108 FAST-RISE MERCURY PULSER


Risetime—1 millimicrosecond into a terminated 52-ohm line.
Repetition Rate—240 pps.
Output Voltage—10 volts, approximately, when cable is terminated in 52 ohms.
Price \$125.

Includes: 1—Cable (012-033)
 1—Cable (012-001)
 1—T-Pad (10:1, 52 to 170 Ω)




TYPE 121 WIDE-BAND PREAMPLIFIER

Voltage Gain—0.01 to 100, continuously variable.
Frequency Response—5 cycles to 12 mc.
Risetime—less than 0.03 μ sec.
Maximum Output Voltage—1 v peak-to-peak in terminated 93-ohm cable.
Price \$280.




TYPE 122 LOW-LEVEL PREAMPLIFIER

Voltage Gain—1000.
Frequency Response—0.16 cycles to 40 kc maximum.
Rejection Ratio—80 to 100 db for in-phase signals.
Noise Level—4 μ v rms maximum.
Output Voltage—20 v maximum (peak-to-peak).
Input Impedance—10 megohms paralleled by approximately 50 μ mf.
Battery operated for minimum noise level.
Price, without batteries, \$125.



TYPE 123 PREAMPLIFIER

Frequency Response—
 Within 2% from 15 cycles to 6 kc.
 Within 3 db from 3 cycles to 25 kc.
Voltage Gain—100 times.
Hum-Free—Powered by miniature batteries.
Compact—3 $\frac{3}{8}$ " high, 1 $\frac{1}{2}$ " wide, 2 $\frac{1}{4}$ " deep.
Weight—10 ounces
Price \$50.



AUXILIARY INSTRUMENTS

TYPE 161 PULSE GENERATOR

Variable-amplitude positive or negative pulse from 0 to 50 v. Positive Gate—50 v amplitude.

Output Characteristics

Duration—calibrated, continuously variable, 10 μ sec to 0.1 sec.

Delay—continuously variable, 0 to 100% of triggering sawtooth waveform.

Risetime—less than 0.5 μ sec.

Price \$125.

TYPE 162 WAVEFORM GENERATOR


Output Waveforms — positive pulse, positive gate, and negative-going sawtooth.

Output Characteristics—

Repetition Rate—0.1 c to 10 kc for recurrent operation.

Duration—pulse 10 μ sec to 0.05 sec; gate and sawtooth, 100 μ sec to 10 sec.

Amplitude—pulse and gate, 50 v; sawtooth, +150 v to +20 v. Price \$125.

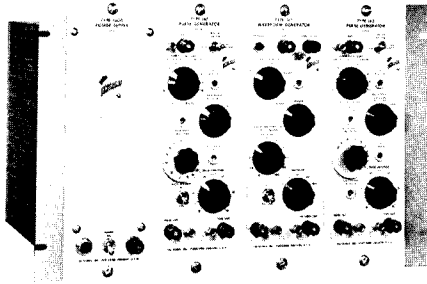

TYPE 160A POWER SUPPLY

Large load capacity—Provides operating power for four to six 161, 162, 163 Units plus a 360 Indicator Unit.

Electronic voltage regulation.

Price \$175.

TYPE 163 FAST-RISE PULSE GENERATOR

Variable-amplitude positive pulse, 0 to 25 v.

Fixed-amplitude positive gate, 25 v.

Output Characteristics—

Risetime—less than 0.2 μ sec.

Duration—Calibrated, continuously variable, 1 μ sec to 10,000 μ sec.

Delay—Continuously variable to 100% of triggering sawtooth duration.

Price \$125.

TYPE 360 INDICATOR

Vertical Passband—DC to 500 kc.


Calibrated vertical attenuator

Deflection factor—0.05 v/div.

Waveform Requirements—for Horizontal Deflection—50 v positive unblanking pulse, and a sawtooth of either polarity with amplitude from 110 to 150 v and extreme voltage limits at -90 v and +170 v.

Powered by a Type 160A, or Type 126 Power Supply.

Price \$250.



TYPE 126 POWER SUPPLY

Provides operating power for one Type 161, 162, 163, or 360.

Electronic voltage regulation.



Price \$100.

TYPE 181 TIME-MARK GENERATOR

Time-marks—1, 10, 100, 1000, and 10,000 microseconds, plus 10-mc sine wave.

1-mc crystal controlled oscillator

is accurate within 0.03%. Price \$240.



TYPE 180A TIME-MARK GENERATOR


Time-Marks—1, 5, 10, 50, 100, 500 μ sec; 1, 5, 10, 50, 100, 500 msec; 1, 5 seconds.

Three Sine-Wave Frequencies—5 mc, 10 mc, and 50 mc.

Six Trigger-Rate Frequencies—1, 10, 100 cycles and 1, 10, 100 kc.

Temperature-stabilized crystal provides stability of 2 ppm.

Price \$575.



TYPE 190A CONSTANT- AMPLITUDE SIGNAL GENERATOR

Output Frequency—350 kc to 50 mc, continuously variable, 50 kc reference signal.

Output Amplitude—40 mv to 10 v peak-to-peak, continuously adjustable.

Amplitude Variation—less than $\pm 2\%$ from 50 kc to 30 mc; less than $\pm 5\%$ from 30 mc to 50 mc.

Harmonic Content—typically less than 5%.

Price \$300.

TEKTRONIX, INC., VICTORIA AVENUE, ST. SAMPSON'S, GUERNSEY, CHANNEL ISLES**Telephone: CENTRAL 3767 CABLE: TEK GUERNSEY TELEX 41-93****Tektronix Overseas Representatives**

ARGENTINA	Ricma Argentina S. A., Sarmiento 309-Tercer Piso, Casilla Correo 2824, Buenos Aires, Argentina Gerencia: 31-3990
AUSTRALIA	Electronic Industries Imports Pty. Ltd., 139-143 Bouverie St., Carlton, N. 3, Melbourne, Australia FJ-4161/8 Electronic Industries Imports Pty. Ltd., 90 Grote St., Adelaide, S. A., Australia LA-5295 Electronic Industries Imports Pty. Ltd., 52 Bowen St., Brisbane, Qld., Australia B-6462 Electronic Industries Imports Pty. Ltd., 68 Railway Pde., West Perth, W. A., Perth, Australia BA-8587/9686 Electronic Industries Imports Pty. Ltd., 713 Parramatta Rd., Leichhardt, NSW, Sydney, Australia LM-6327
AUSTRIA	Inglomark Markowitsch & Co., Mariahilfer Strasse 133, Wien 15, Austria 54-75-85-SERIE
BELGIUM	Regulation-Mesure, S.P.R.L., 22, rue Saint-Hubert, Bruxelles 15, Belgium 70. 79. 89
BRAZIL	Consulting & Suppliers Company for South America Inc., 61 Broadway, New York 6, New York Bowling Green 9-0610/11 Importacao Industria E Comercio Ambriex S. A., Av. Graca Aranha 57-510 Rio De Janeiro, Brazil 42-7990, 42-7291 Palmar Ltda., Rua 7 de Abril 252, Sao Paulo, Brazil 34-4497
CUBA	Laboratorios Meditron, Calle B No. 56, Vedado, Habana, Cuba F-5970
DENMARK	Tage Olsen A/S, Centrumgaarden, Room 133, 6D, Vesterbrogade, Kobenhavn V, Denmark Palae 1369, Palae 1343
ENGLAND	Livingston Laboratories Ltd., Retcar Street, London N.19, England Archway 6251
FINLAND	Into O/Y, 11 Meritullinkatu, Helsinki, Finland 62 14 25, 35 125
FRANCE	Maurice I. Parisier & Co., 741-745 Washington St., New York 14, N. Y. ALgonquin 5-8900 Relations Techniques Intercontinentales, 134, Avenue de Malakoff, Paris 16, France Passy 08-36, Kleber 54-82
GREECE	Marios Dalleggio, 2, Rue Alopekis, Athenes (K), Greece..... 70.669
INDIA	Electronic Enterprises, 46, Karani Building, Opp. Cama Baug., New Charni Road, Bombay 4, India 75376
ISRAEL	Landseas Products Corp., 48 West 48th Street, New York 36, New York COlumbus 5-8323 Landseas Eastern Co., P. O. Box 2554, Tel Aviv, Israel 66890
ITALY	Silverstar, Ltd., 21 Via Visconti Di Modrone, Milan, Italy 792.791, 709.536 Silverstar, Ltd., 12 Via Paisiello, Roma, Italy 867.886 Silverstar, Ltd., 3 Corso Mattcotti, Turin, Italy 524.021
JAPAN	Midoriya Electric Co., Ltd., 3, 2-Chome, Kyobashi, Chuo-Ku, Tokyo, Japan Kyobashi (56) 1786, 7415, 7416 7439, 5396
NETHERLANDS	C. N. Rood, n. v., 11-13 Cort van der Lindenstraat, Rijswijk, Z. H., Netherlands The Hague 98.51.53
NORWAY	Morgenstjerne & Co., Colletts Gate 10, Oslo, Norway 60 17 90
SWEDEN	Erik Ferner AB, Bjornsonsgatan 197, Bromma, Stockholm, Sweden 87 01 40
SWITZERLAND	Omni Ray AG, Dufourstrasse 56, Zurich 8, Switzerland (051) 34-44-30
UNION OF SOUTH AFRICA	Protea Holdings, Ltd., 42, Faraday Street, Wemmer, Johannesburg, Union of South Africa 33-4762/3
URUGUAY	Compania Uruguaya De Rayos X y Electromedicina S. A. Mercedes 1300, Yaguaron 1449, Montevideo, Uruguay 8 58 29
WEST GERMANY	Rohde & Schwarz Vertriebs, GmbH, Berlin W30, Augsburgstrasse 33, West Germany 91 27 62 Rohde & Schwarz Vertriebs, GmbH, Hannover. Schillerstrasse 23, West Germany 1 33 80 Rohde & Schwarz Vertriebs, GmbH, Karlsruhe, Kriegstrasse 39, West Germany 25202 Rohde & Schwarz Vertriebs, GmbH, Koln, Habsburger-Ring 2-12, West Germany 215341 Rohde & Schwarz Vertriebs, GmbH, Munchen 9, Briennerstrasse 23, West Germany 59 52 65

Other OVERSEAS areas please write or cable directly to the Export Department Portland, Oregon, U.S.A.

Please see other side for Field Offices and Representatives of North America

Tektronix, Inc., P. O. Box 831, Portland 7, Oregon

Telephone: **CYpress 2-2611**

TWX—PD 311

Cable: TEKTRONIX

AN OREGON CORPORATION

Field Engineering Offices

ALBUQUERQUE* Tektronix, Inc., 127C Jefferson St. N.E., Albuquerque, New Mexico TWX: AQ 96.....AMherst 8-3373
Southern New Mexico Area: Enterprise 678

ATLANTA* Tektronix, Inc., 3272 Peachtree Road, N.E., Atlanta 5, Georgia TWX: AT 358 CEdar 3-4484

BALTIMORE* Tektronix, Inc., 724 York Road, Towson 4, Maryland VALley 5-9000
TWX: TOWSON MD 535

BOSTON* Tektronix, Inc., 442 Marrett Road, Lexington 73, Massachusetts
TWX: LEXINGTON MASS 940.....VOLunteer 2-7570

BUFFALO Tektronix, Inc., 961 Maryvale Drive, Buffalo 25, New York
TWX: WMSV 2 SPring 7861

CHICAGO* Tektronix, Inc., 7514 W. North Ave., Elmwood Park 35, Illinois
TWX: RIVER GROVE ILL 1395 GLadstone 6-7930

CLEVELAND Tektronix, Inc., 1503 Brookpark Road, Cleveland 9, Ohio TWX: CV 352.....FLorida 1-8414
Pittsburgh Area: ZENith 0212

DALLAS* Tektronix, Inc., 6211 Denton Drive, P. O. Box 35104, Dallas 35, Texas
TWX: DL 264 FLeetwood 2-4087, 2-7655

DAYTON Tektronix, Inc., 3601 South Dixie Drive, Dayton 39, Ohio TWX: DY 363..... AXminster 3-4175

DENVER Hytronic Measurements, Inc., 1295 South Bannock Street, Denver 23, Colorado
TWX: DN 863 PEarl 3-3701

DETROIT* Tektronix, Inc., 27310 Southfield Road, Lathrup Village, Michigan
TWX: SOUTHFIELD MICH 938 ELgin 7-0040

ENDICOTT* Tektronix, Inc., 3214 Watson Blvd., Endwell, New York TWX: ENDICOTT NY 290 Pioneer 8-8291

HOUSTON Tektronix, Inc., 2605 Westgrove Lane, Houston 27, Texas TWX: HO 743.... MOhawk 7-8301, 7-8302

KANSAS CITY Tektronix, Inc., 5920 Nall, Mission, Kansas..TWX: MISSION KAN 1112 RAndolph 2-6522, 2-6523
St. Louis Area: ENterprise 6510

LOS ANGELES AREA

East L. A. Tektronix, Inc., 5441 East Beverly Blvd., East Los Angeles 22, California
TWX: MTB 7762 RAYmond 3-9408, 3-9409

***West L. A.** Tektronix, Inc., 11681 San Vicente Blvd., West Los Angeles 49, California BRadshaw 2-1563
TWX: WEST LOS ANGELES CAL 6698 GRanite 3-1105

MINNEAPOLIS Tektronix, Inc., 3100 W. Lake Street, Minneapolis 16, Minnesota TWX: MP 983..Walnut 7-9559, 7-8932

NEW YORK CITY AREA

***New York City and Long Island served by:**
Tektronix, Inc., 840 Willis Avenue, Albertson, L. I., New York TWX: G CY NY 1416 Pioneer 7-4830

Westchester County, Western Connecticut, Hudson River Valley served by:
Tektronix, Inc., 49 Pondfield Road, Bronxville 8, New York
TWX: BRONXVILLE NY 1207 DEerfield 7-3771

***Northern New Jersey served by:**
Tektronix, Inc., 412 Chestnut Street, Union, New Jersey TWX: UNVL 82 MURdock 8-2222

ORLANDO* Tektronix, Inc., 205 East Colonial Drive, Orlando, Florida..TWX: OR 7008..... GARden 5-3483

PALO ALTO* Tektronix, Inc., 701 Welch Road, Palo Alto, California TWX: PALO ALTO CAL 112 DAvenport 6-8500

PHILADELPHIA* Tektronix, Inc., 7709 Ogontz Ave., Philadelphia 50, Pennsylvania TWX: PH 930 WAverly 4-5678

PHOENIX Tektronix, Inc., 7000 E. Camelback Road, Scottsdale, Arizona
TWX: SCOTTSDALE ARIZ 52 WHitney 6-1601

PORTLAND Hawthorne Electronics, 700 S. E. Hawthorne Blvd., Portland 14, Oregon BElmont 4-9375

SALT LAKE CITY Hytronic Measurements, Inc., 2022 South Main St., Salt Lake City 15, Utah
TWX: SU 563 INgersoll 6-4924

SAN DIEGO Tektronix, Inc., 1900 Rosecrans Street, P.O. Box 6157, San Diego 6, California
TWX: SD 6341 ACademy 2-0384

SEATTLE Hawthorne Electronics, 112 Administration Bldg., Boeing Field, Seattle, Washington
TWX: SE 798 PArkway 5-3962

ST. PETERSBURG Tektronix, Inc., 2330 Ninth Street South, St Petersburg 5, Florida TWX: ST PBG 8034 .. ORange 1-6139

SYRACUSE* Tektronix, Inc., 313 Nottingham Road, Syracuse 10, New York TWX: SS 423 Gibson 6-5630

TORONTO* Tektronix, Inc., 3 Finch Ave. East, Willowdale, Ontario, Canada Toronto, BAldwin 5-1138

WASHINGTON, D. C.* Tektronix, Inc., 9619 Columbia Pike, Annandale, Virginia
TWX: F CH VA 760 Clearbrook 6-7411

***ALSO REPAIR CENTERS**

Please see other side for Overseas Representatives

LITHO IN U.S.A.