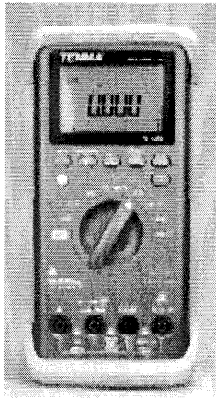


72-6202**72-6203****Heavy Duty Dual Display DMMs with RS-232****Features:**

- 4,000/40,000 count selectable dual digital display plus analog bargraph
- Optical isolated RS-232 communication
- AC/DC voltage and current
- Resistance
- Capacitance measurement
- Data hold
- Relative mode
- Dynamic recording with time stamp
- Diode test
- Continuity beeper
- Current input warning

Model #72-6202 additional features:

- True RMS AC and AC+DC
- Frequency
- Temperature
- dBm measurement with 20 selectable impedances
- Conductance
- Square wave output with adjustable duty cycle
- Backlit display
- Both models meet IEC-1010 safety standards for 600V CAT III and 1000V CAT II applications
- Includes 9V battery, protective rubber holster and owners manual

Specifications	Range	Max Resolution	Basic Accuracy
DC voltage	40mV~1000V	1mV	±(0.06% + 3 digits)
AC voltage	40mV~750V	1mV	50~60Hz:
True RMS			±(0.7% + 5 digits)
(#72-6202)			45~5KHz:
			±(1.5% + 5 digits)
			5KHz~20KHz:
			±(2% + 5 digits)
DC current	400mA~10A	10nA	±(0.2% + 3 digits)
AC current	400mA~10A	10nA	±(1.0% + 5 digits)
Resistance	400ohm~40Mohm	0.1ohm	±(0.2% + 3 digits)

Capacitance	4nF~9999mF	1pF	4nF~40nF: ±(2.5% + 6 digits) 400nF~400mF: ±(2.0% + 4 digits) >2mF: ±(3.0% + 4 digits)
Frequency (#72-6202)	100Hz~10MHz	0.001Hz	±(0.002% + 1 digit)
Temperature (#72-6202)	-40°C~1372°C -40°F~2502°F	1°C/1°F	±(0.3% + 6°F or 3°C)
Square wave output (#72-6202)	0.5Hz~4800Hz		
Dimensions	3 1/2" (W) x 7 1/2" (H) x 1 1/2" (D)		
Weight	2 lbs.		

Accessories

Order #	Description
72-6251	RS-232 Software and Interface Cable
72-6252	K-Type Transition plug
72-6253	K-Type Thermocouple