



PROFESSIONAL DIGITAL TWO-WAY RADIO

# MOTOTRBO™ DM4000 SERIES DIGITAL MOBILE RADIOS QUICK REFERENCE GUIDE

- EN
- DE
- FR
- IT
- ES
- PR
- NL
- DA
- SV
- SF
- HU
- GK
- TU
- CZ
- PL
- RO
- RU
- AR



## DM4000 Series Mobile Radios Quick Reference Guide

### Important Safety Information

#### Product Safety and RF Exposure Compliance



Caution

Before using this product, read the operating instructions for safe usage contained in the Product Safety and RF Exposure booklet enclosed with your radio.

#### ATTENTION!

**This radio is restricted to occupational use only to satisfy FCC/ICNIRP RF energy exposure requirements.** Before using this product, read the RF energy awareness information and operating instructions in the Product Safety and RF Exposure booklet enclosed with your radio (Motorola Publication part number 6866537D37) to ensure compliance with RF energy exposure limits.

For a list of Motorola-approved antennas, batteries, and other accessories, visit the following website:

<http://www.motorolasolutions.com>

### Computer Software Copyright

The Motorola products described in this manual may include copyrighted Motorola computer programmes stored in semiconductor memories or other media. Laws in the United States of America and other countries preserve for Motorola Europe and Motorola Solutions Inc. certain exclusive rights for copyrighted computer programmes including, but not limited to, the exclusive right to copy or reproduce in any form the copyrighted computer programme. Accordingly, any copyrighted Motorola computer programmes contained in the Motorola products described in this manual may not be copied, reproduced, modified, reverse-engineered, or distributed in any manner without the express written permission of Motorola. Furthermore, the purchase of Motorola products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any licence under the copyrights, patents, or patent applications Motorola, except for the normal non-exclusive licence to use that arises by operation of the law in the sale of the product.

### Your Quick Reference Guide

This Quick Reference Guide covers the basic operation of the DM4000 Series MOTOTRBO Mobile Radios. For more operational details, refer to your User Guide. Check with your dealer or system administrator because your radio may have been customized for your specific needs.

### Powering Up and Turning Off the Radio

To turn on the radio, press the On/Off button briefly.

To turn off the radio, press and hold the On/Off button.

### Adjusting the Volume

To increase the volume, turn the Volume/Channel Knob clockwise.


To decrease the volume, turn the Volume/Channel Knob counterclockwise.

## Radio Controls

Record your radio's programmable button functions in the blanks provided.

**SP** represents Short Press.

**LP** represents Long Press.

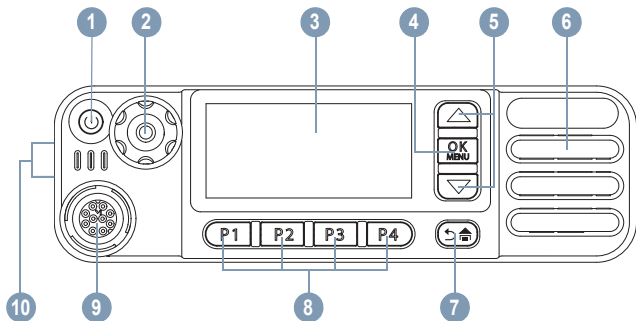

- 1 On/Off Button
- 2 Volume/Channel Knob
- 3 Display
- 4 OK/Menu Button†
- 5 Scroll Up/Down†
- 6 Speaker
- 7 Return/Home Button†

- 8 Front Buttons (Programmable)  
P1 - **SP**: \_\_\_\_\_ **LP**: \_\_\_\_\_  
P2 - **SP**: \_\_\_\_\_ **LP**: \_\_\_\_\_  
P3 - **SP**: \_\_\_\_\_ **LP**: \_\_\_\_\_  
P4 - **SP**: \_\_\_\_\_ **LP**: \_\_\_\_\_
- 9 Accessory Connector
- 10 LED Indicators

† Not for Numeric Display radio models

## LED Indicator

**Blinking red** – Radio is receiving an emergency transmission or has failed the self-test upon powering up, or has moved out of range if radio is configured with Auto-Range Transponder System.

**Solid green** – Radio is powering up, or transmitting.

**Blinking green** – Radio is receiving a non-privacy-enabled call or data, or detecting activity or retrieving Over-the-Air Programming transmissions over the air.

**Double blinking green** – Radio is receiving a privacy-enabled call or data.

**Solid yellow** – Radio is monitoring a conventional channel or in Bluetooth Discoverable Mode.

**Blinking yellow** – Radio is scanning for activity or receiving a Call Alert, or all local Linked Capacity Plus channels are busy.

**Double blinking yellow** – Radio is no longer connected to the repeater while in Capacity Plus or Linked Capacity Plus, all Capacity Plus channels or Linked Capacity Plus channels are currently busy, Auto Roaming is enabled, radio is actively searching for a new site. Also indicates radio has yet to respond to a group call alert, or radio is locked.



**MOTOROLA**

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.  
© 2011, 2012 Motorola Solutions, Inc. All rights reserved.  
August 2012.  
[www.motorolasolutions.com/mototrbo](http://www.motorolasolutions.com/mototrbo)



**68012003062-C**